


# GLOBE



Elegante, un design circolare che inonda gli ambienti di luce, prestandosi a composizioni originali a parete e soffitto, creando atmosfere delicate e, allo stesso tempo, ricche di stile. Globe è un apparecchio da interni a scomparsa totale per installazione in parete e soffitto di cartongesso o laterizio con corpo realizzato in AirCoral®. Globe crea con la sua parabola wall-washer un cerchio luminoso che ha un preciso obiettivo: attribuire alla luce il ruolo di assoluta protagonista regalando un valore aggiunto ad ogni spazio in cui viene installato.

*Elegant, a circular design that floods spaces with suffused lighting, creating delicate and stylish atmospheres. Globe is a totally disappearing indoor recessed luminaire, installable on plasterboard or brick walls and ceilings, with a body made of AirCoral®.*

*Globe creates with its wall-washer parabola a luminous circle that has a precise aim: giving light the role of absolute protagonist, adding value on any space it is installed in.*

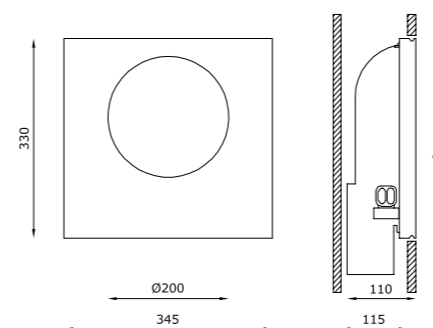

max 60W R7s  
max 26/32W Gx24q-3  
max 42W Gx24q-4  
max 6.5W - 350 mA LED

max 150W R7s  
max 26/32W Gx24q-3  
max 6.5W - 350 mA LED

max 150W R7s  
max 26/32W Gx24q-3  
max 42W Gx24q-4  
max 6.5W - 350 mA LED

## Recessed

### TECHNICAL FEATURES

Code	6292.AC	6294.EB.AC	6299.P.AC	6298.AC	6289.AC
Type	Wall-washer 	Wall-washer 	Wall-washer 	Wall-washer 	Wall-washer 
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	14.61 m <sup>2</sup>	14.61 m <sup>2</sup>	14.61 m <sup>2</sup>	14.61 m <sup>2</sup>	14.61 m <sup>2</sup>
Weight	6 Kg	6.1 Kg	6.4 Kg	6.5 Kg	6 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed	Wall and ceiling recessed	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP40	IP40	IP40	IP40	IP40
Insulation class	I	I	I	I	I
Control gear	-	Electronic ballast	Dimmable electronic ballast	Electronic ballast	Dimmable constant current driver
Dimensions	A: 330 mm	A: 390 mm	A: 390 mm	A: 470 mm	A: 330 mm
Cut out for plasterboard	350 x 340 mm	350 x 340 mm	350 x 340 mm	350 x 340 mm	350 x 340 mm
Lamp type	QT-DE12 (75 mm) 	TC-DEL/TEL 	TC-TEL 	TC-DEL/TEL 	LED 350 mA 
Lamp wattage	60W	26/32W	42W	26/32W	6.5W
Luminous efficacy	-	-	-	-	810 lm - 3000K
Light distribution	-	-	-	-	Wide beam 120°
Fitting	R7s	Gx24q-3	Gx24q-4	Gx24q-3	-
Light colour	-	-	-	-	White 3000K White 2700K   4000K (on request)
Light hole	Ø 200 mm	Ø 200 mm	Ø 200 mm	Ø 200 mm	Ø 200 mm
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	-	-	-	-	>80
Emergency	-	-	-	1 hour	-
Energy efficiency class	A	A	A	A	A*
Note	-	-	Standard: dimmable switch dim. / push (on request: dimmable 1-10V or DALI).	-	Trailing-edge and leading-edge dimming (20 - 100%).

\* The absorption capacity per m<sup>2</sup> calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m<sup>2</sup>



Private Villa - ph. T. Pagani - Lugano



Private House - A. Castrignano - ph. R. Gasperoni - Milan