

SLICE



800 lm IN 12.5 mm DI INGOMBRO.

Slice è un apparecchio da incasso a scomparsa totale per interni, che si caratterizza per il design estremamente sottile: 12.5 mm di spessore. Grazie all'assenza di scatole di montaggio, Slice permette installazioni sia a soffitto che a parete, rimanendo all'interno del solo spessore della lastra di cartongesso, o di intonaco. Questo rivoluzionario prodotto da incasso è realizzato in AirCoral® di cui mantiene tutte le caratteristiche di scomparsa totale. L'ottica LED è in grado di emettere 800 lumen. Installabile con driver remoto, permette la manutenzione dal solo lato frontale dell'apparecchio, riducendo al minimo interventi post installazione.

800 lm IN A SPACE OF 12.5 mm.

Slice is a totally recessed luminaire for indoor use, characterised by its extremely slim design: 12.5 mm (0.49") thick. Thanks to the absence of mounting boxes, Slice can be both ceiling and wall mounted, fitted into the thickness of the drywall panel or plaster. This revolutionary recessed product is made in AirCoral® of which it maintains all its total recessed characteristics. The LED optics can emit 800 lumen. Installable with remote driver, maintenance can be carried out only from the front of the luminaire, reducing to the minimum any post-installation operations.

SCOMPARSATA TOTALE IN SOLI 12.5 mm


TOTALLY CONCEALED INSTALLATION
IN JUST 12.5 mm (0.49")

necessita di soli 5 mm per
l'installazione, senza cassaforma

*needs 5 mm (0.2") for installation,
without mounting formwork*

ispezione frontale
per la manutenzione

*front inspection
for maintenance purposes*

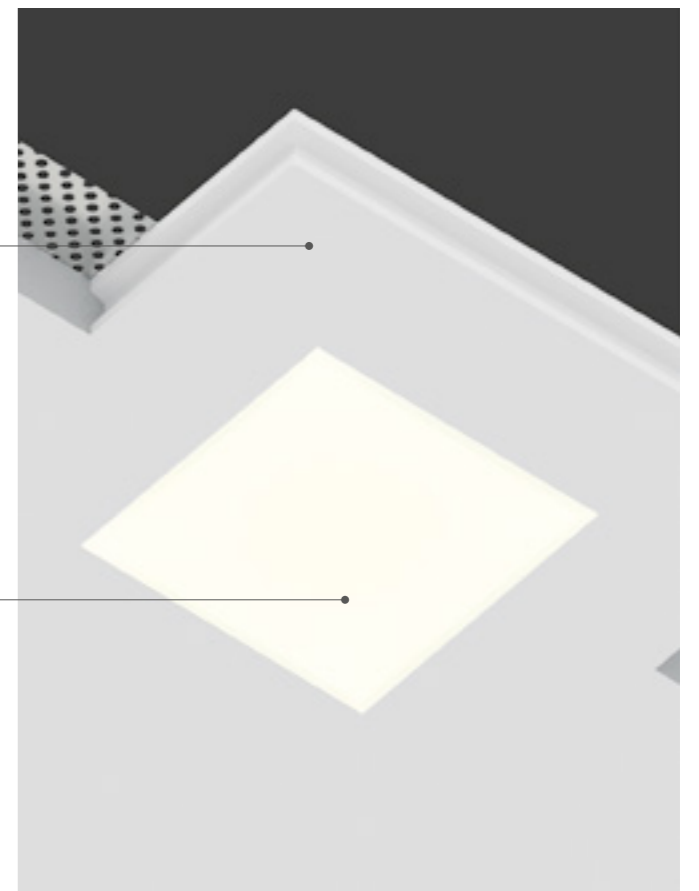

800 lm


elevato output luminoso

high luminous output

MINIMUM REAR SIZE

soli 5 mm per l'installazione
only 5 mm (0.2") for installation


driver remoto
remote constant current driver

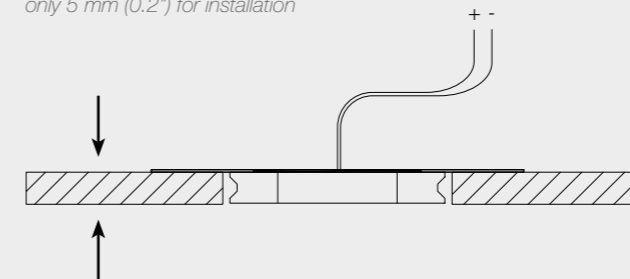

12.5 mm, stesso spessore del cartongesso
12.5 mm (0.49"), same thickness as drywall

Slice necessita di 5 mm per l'installazione, è privo di cassaforma di montaggio ed è installabile all'interno dei soli 12.5 mm di strato di cartongesso. Grazie alla possibilità di ispezione frontale, non è necessaria alcuna botola di controllo.

Slice needs 5 mm (0.2") for installation, is without mounting formwork and can be installed in a layer of drywall just 12.5 mm (0.49") thick. Because it can be inspected from the front it does not need any inspection hatch.



CODE COMPOSITION

1921.AC 4 R 00 E _ WD	
	<i>light colour</i>
27	2700K
30	3000K
40	4000K

example of code composition 1921.AC 4 R 00 E 27 WD

TECHNICAL FEATURES

Code	1921.AC XX
Type	Downlight 90°
Material	AC: AirCoral®
Absorption capacity*	1.20 m²
Weight	0.08 Kg
Mounting	Wall and ceiling recessed
IP rating	IP40
Insulation class	III
Control gear	Remote constant current driver (not included)
Cut out for plasterboard	130 x 130 mm
Lamp type	LED 300 mA Vf: 23.5 VDC
Lamp wattage	1 x 7W
Luminous efficacy	800 lm
Light distribution	Diffuse
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Light hole	60 x 60 mm
Voltage connection	By driver (optional)
CRI	90
Emergency	-
Energy efficiency class	A++
Note	On request available dimmable PUSH or DALI, remote installation.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1921.AC XX	H8300.A	Constant current electronic driver. Remote installation	Suitable for n°1 code 1921.AC XX - 350 mA



SUPERFUTUREDESIGN®