



2023



08	INDEX BY NAME
09	INDEX BY CATEGORY
21	INDOOR
271	OUTDOOR
317	GENERAL INFORMATION

Forged by fire

Buzzi & Buzzi con la sua trentennale esperienza nell'utilizzo di materiali innovativi realizza una nuova linea di prodotti in metallo.

Alluminio, ottone e acciaio gli elementi base per la creazione di una collezione sia indoor che outdoor che aumentano la possibilità di utilizzo in nuovi e maggiori campi di applicazione, con l'attenzione ai dettagli che da sempre contraddistingue il brand.

Buzzi & Buzzi, with its thirty years of experience in the use of innovative materials, realizes a new line of iron products.


Aluminium, brass and steel are the basic elements for the creation of a collection which is both indoor and outdoor, increasing the possibility of use in new and greater fields of application, with attention to details which has always distinguished the brand.

76	B-INSIDE	154	Q1 220V
82	B30	44	Q1 48V
90	B55	158	Q2 220V
64	C1 48V	162	Q3 220V
306	DB9	166	Q4 220V
310	DB10	48	Q4 48V
314	DB11	298	S1
284	F40	302	S1G
194	F50	262	The Dark
206	Genius Basic Naked	258	The Tube
276	Genius Basic Naked IP65	60	The Tube 48V
216	Genius Concrete	114	The Tube Nano 48V
282	Genius Concrete IP65	214	Twin Genius Naked
208	Genius Naked	26	U1 48V
280	Genius Naked Dim To Warm IP65	104	U1 Nano 48V
278	Genius Naked IP65	222	X1
174	GL 220V	140	X1 220V
58	GL 48V	28	X1 48V
288	H2NOT	106	X1 Nano 48V
292	H2STOP	228	X2
168	Inciso Q4 220V	234	X3
52	Inciso Q4 48V	238	X4
68	L1 48V	198	XJR8
112	L1 Nano 48V	202	XJR9
180	L40	242	Y1
248	M1	142	Y1 220V
150	M1 220V	32	Y1 48V
40	M1 48V	108	Y1 Nano 48V
266	Mikado	192	Y1D
172	ML 220V	246	Z1
56	ML 48V	146	Z1 220V
120	N-INSIDE	36	Z1 48V
126	N10	110	Z1 Nano 48V
252	Q1		


21 Indoor

25 48V Systems

LIGHT MODULES

					
C1 48V 64	GL 48V 58	INCISO Q4 48V 52	L1 48V 68	M1 48V 40	ML 48V 56
					
Q1 48V 44	Q4 48V 48	THE TUBE 48V 60	U1 48V 26	X1 48V 28	Y1 48V 32
					
Z1 48V 36					

TRACKS

		
B-INSIDE 76	B30 82	B55 90

2548V Systems

NANO TRACKS
LIGHT MODULES



L1 NANO 48V
112



THE TUBE NANO 48V
114



U1 NANO 48V
104



X1 NANO 48V
106



Y1 NANO 48V
108



Z1 NANO 48V
110

NANO TRACKS



N-INSIDE
120



N10
126

137220V Systems

LIGHT MODULES



GL 220V
174



INCISO Q4 220V
168



M1 220V
150



ML 220V
172



Q1 220V
154



Q2 220V
158



Q3 220V
162



Q4 220V
166



X1 220V
140



Y1 220V
142



Z1 220V
146




TRACKS



L40
180

189 Stand alone

RECESSED

					
F50 194	GENIUS BASIC NAKED 206	GENIUS CONCRETE 216	GENIUS NAKED 208	TWIN GENIUS NAKED 214	XJR8 198



XJR9
202



Y1D
192

SURFACE

					
M1 248	Q1 252	X1 222	X2 228	X3 234	X4 238




Y1
242



Z1
246




189 Stand alone

SUSPENDED

		
MIKADO 266	THE DARK 262	THE TUBE 258


271 Outdoor

273 Stand alone

RECESSED					
					
F40 284	GENIUS BASIC NAKED IP65 276	GENIUS CONCRETE IP65 282	GENIUS NAKED DIM TO WARM IP65 280	GENIUS NAKED IP65 278	H2NOT 288
					
H2STOP 292					
SURFACE					
					
DB9 306	DB10 310	DB11 314	S1 298	S1G 302	



Q2
Showroom - Dubai

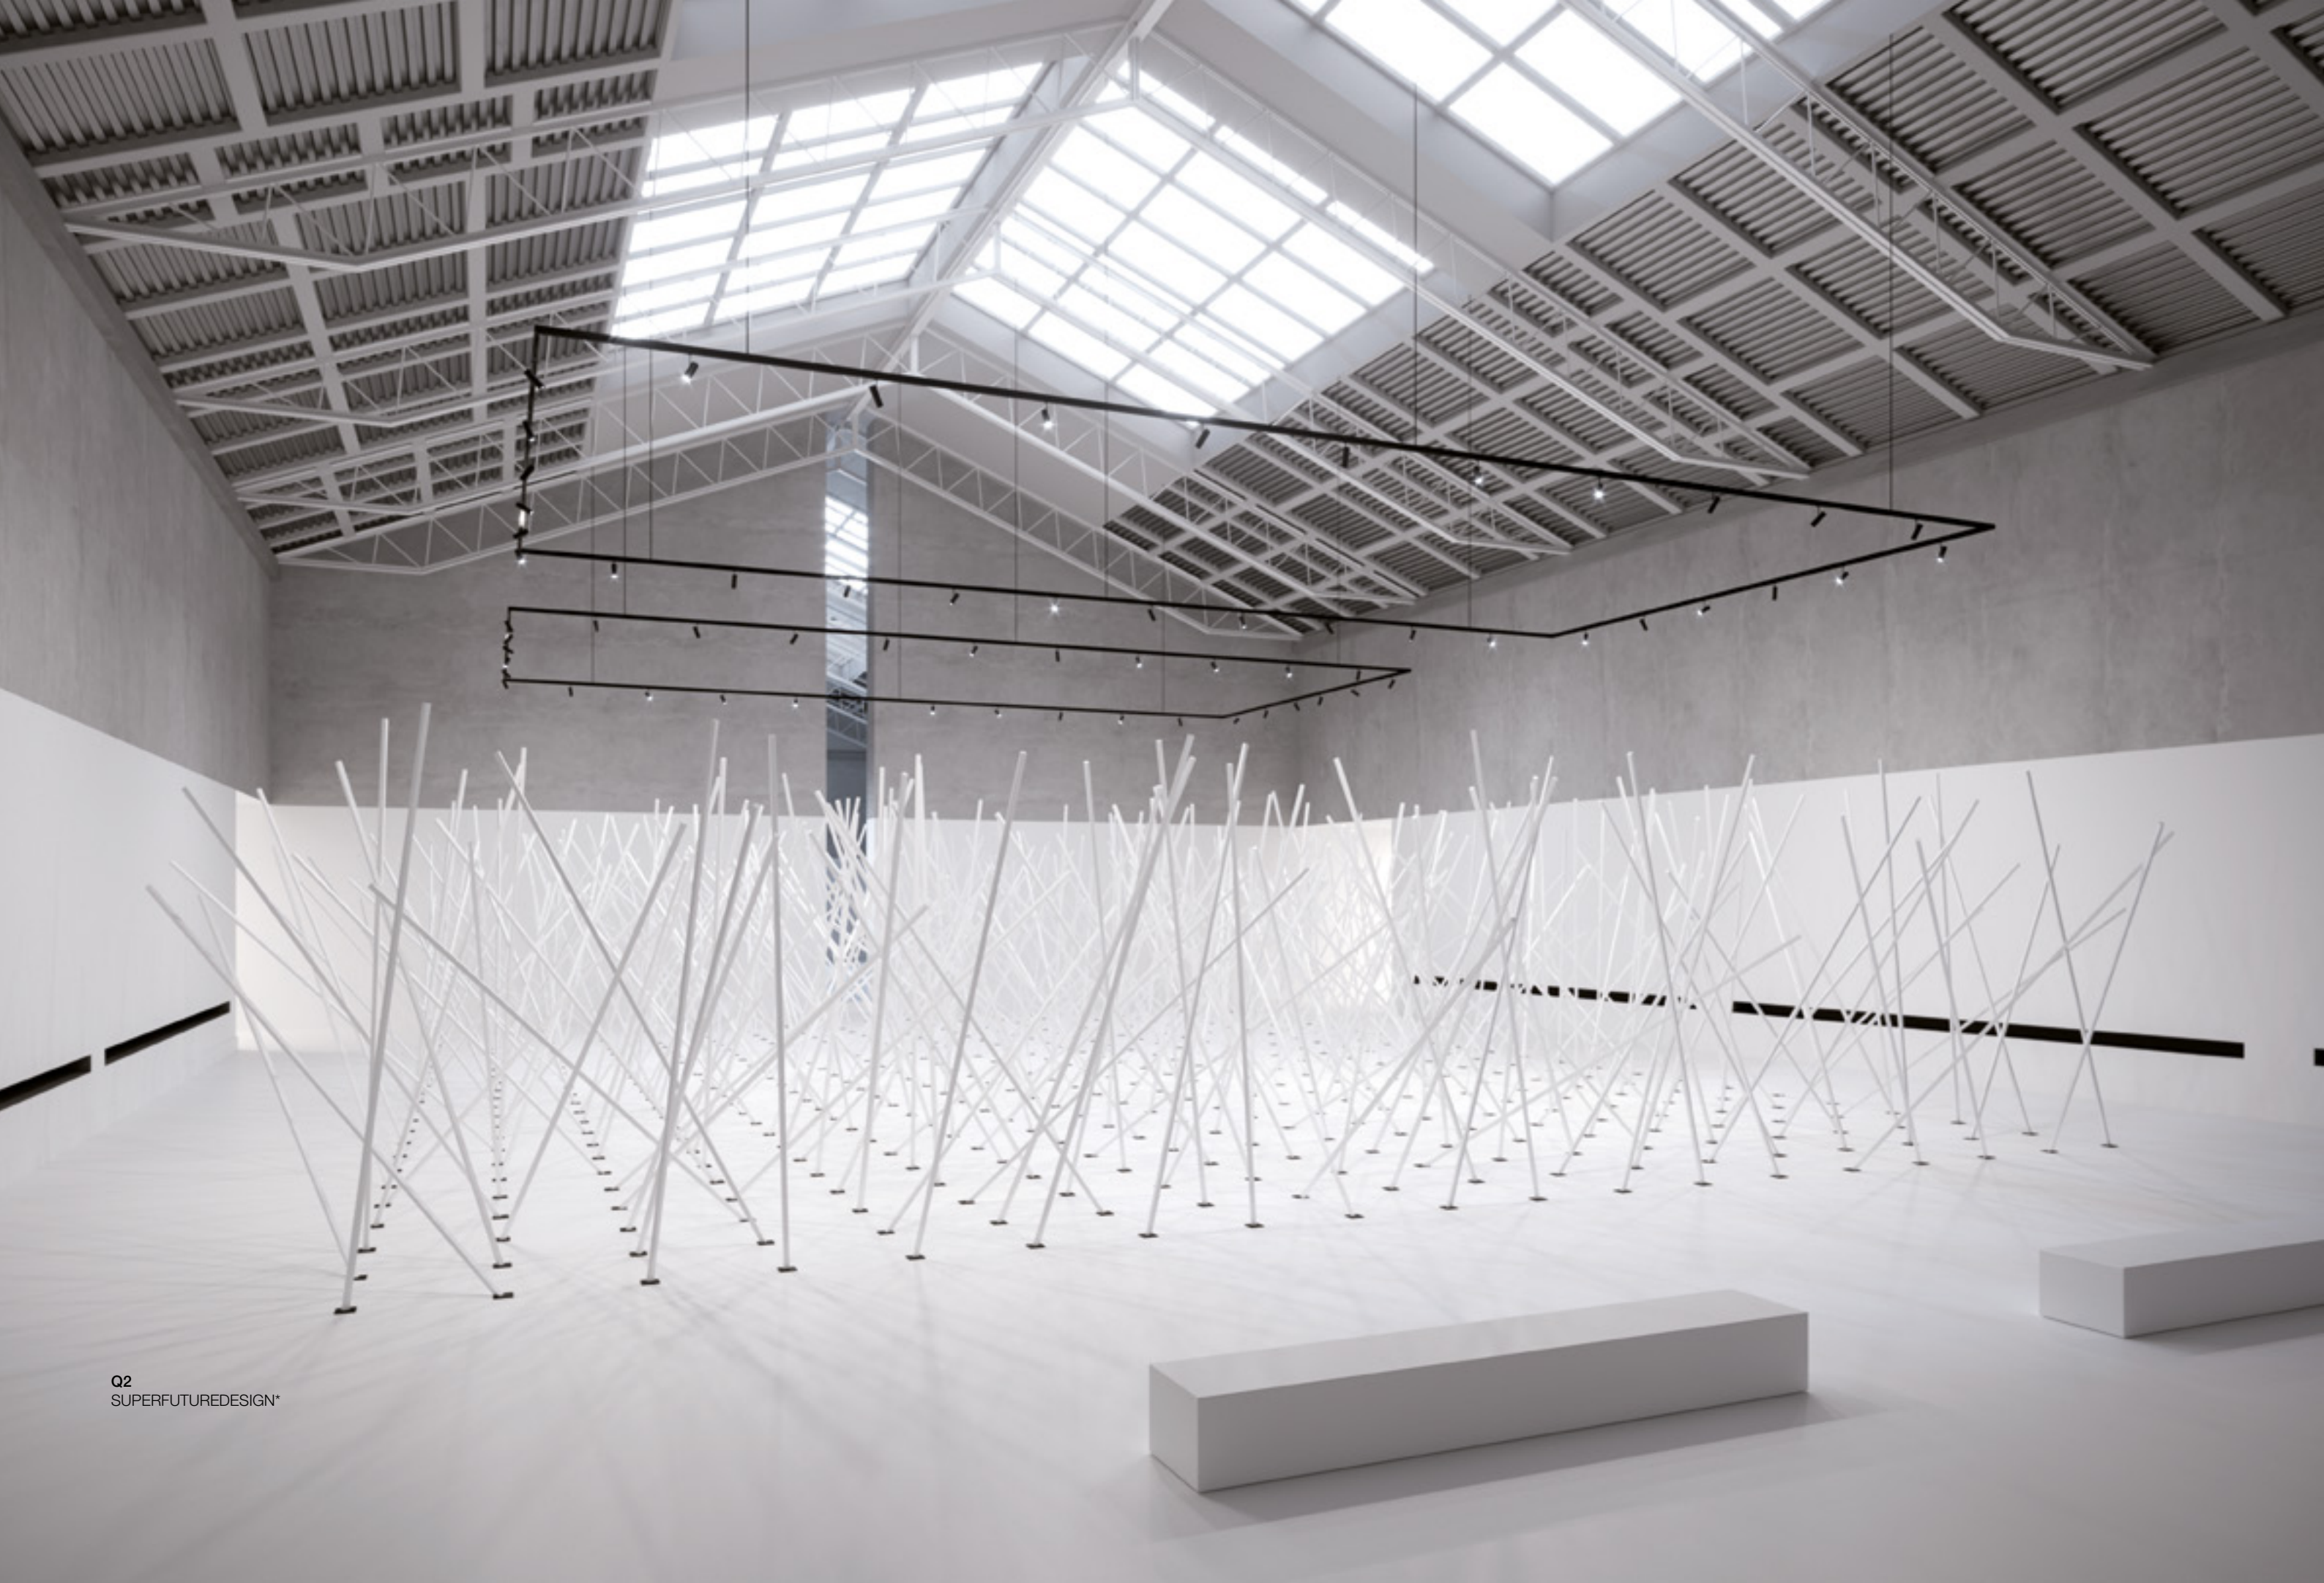



26	U1 48V
28	X1 48V
32	Y1 48V
36	Z1 48V
40	M1 48V
44	Q1 48V
48	Q4 48V
52	Inciso Q4 48V
56	ML 48V
58	GL 48V
60	The Tube 48V
64	C1 48V
68	L1 48V

48V

LIGHT MODULES

U1 48V




Apparecchio illuminante da interni ad alte prestazioni per binario 48V. Il proiettore, disponibile con finitura bianca, nera, champagne o rose gold e lenti intercambiabili, è dotato di braccio direzionabile e inclinabile sull'asse verticale di 360° e orizzontale di 90°.

La luce di U1 48V apporta il minimo impatto visivo e valorizza spazi e ambienti con eleganza. La sorgente luminosa a LED (COB) CRI >90, 3000K, 2700K (4000K su richiesta) è alimentata in corrente continua con convertitore a scomparsa collocato all'interno dell'adattatore del binario.

48V track light high-performance projector for interiors, available in a black,white, champagne or rose gold finish with interchangeable lenses.

The projector, featuring with a minimal design to have a minimum visual impact, it is fitted with a directional arm 360° adjustable on a vertical axis and 90° on a horizontal one.

The light of U1 48V enhances spaces and environments with elegance. The light source is a LED (COB) CRI >90, 3000K, 2700K (4000K light source on request) fed in direct current with incorporated convertor located inside the track adaptor.



CODE COMPOSITION

T048 L 00023			0
			dimmability
ND			non dimmable
DA			DALI
11			1-10V
			light colour
27			2700K
30			3000K
40			4000K
			lens
12			12°
31			31°
54			54°
			finishing
W1			white
B1			black
A1			champagne
A2			rose gold

example of code composition T048 L 00023 W1 12 27 ND 0

TECHNICAL FEATURES

Code	T048 L 00023 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	0.4 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 6W
Luminous efficacy	750 lm - 3000K
Light distribution	Beam 12° Beam 31° Beam 54°
Light colour	White 3000K White 2700K White 4000K (on request)
Voltage connection	48 VDC
CRI	>90
Note	Black tige for U1 48V champagne and rose gold.

X1 48V




X1 48V è un apparecchio illuminante da interni per binario 48V, disponibile con finitura bianca, nera, champagne o rose gold e lenti intercambiabili. Caratterizzato da un proiettore dalle alte prestazioni, dal design minimale per avere il minimo impatto visivo, dotato di braccio direzionabile e inclinabile sull'asse verticale di 360° e orizzontale di 90°. Una luce che valorizza spazi e ambienti con eleganza, rendendo ogni singolo dettaglio il protagonista all'interno dello spazio progettuale. Il proiettore X1 48V ha sorgente luminosa a LED (COB) CRI >90, 3000K o 2700K (4000K su richiesta) alimentata in corrente continua con convertitore a scomparsa collocato all'interno dell'adattatore del binario.

X1 48V is a 48V track light fitting for interiors, available in a black,white, champagne or rose gold finish with interchangeable lenses.

Featuring a high-performance projector with a minimal design to have a minimum visual impact, it is fitted with a directional arm 360° adjustable on a vertical axis and 90° on a horizontal one.

A light which enhances spaces and environments with elegance, making every detail the protagonist within the project space.

The X1 48V projector has an LED (COB) CRI >90, 3000K or 2700K light source (4000K on request) fed in direct current with incorporated convertor located inside the track adaptor.



CODE COMPOSITION

T048 L 00001		0
		<i>dimmiability</i>
ND	non dimmable	
DA	DALI	
11	1-10V	
		<i>light colour</i>
27	2700K	
30	3000K	
40	4000K	
		<i>lens</i>
22	22°	
50	50°	
		<i>finishing</i>
W1	white	
B1	black	
A1	champagne	
A2	rose gold	


example of code composition T048 L 00001 W1 22 27 ND 0

TECHNICAL FEATURES

Code	T048 L 00001 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	0.4 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Light colour	White 3000K White 2700K White 4000K (on request)
Voltage connection	48 VDC
CRI	>90
Note	Black tige for X1 48V champagne and rose gold.




Y1 48V

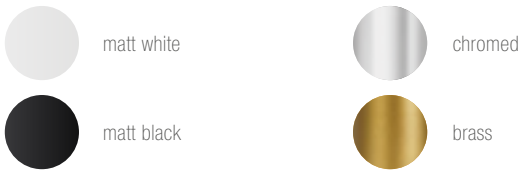

Y1 48V è un proiettore cilindrico per ambienti interni per binari a 48V, con dimensioni molto ridotte per un minimo impatto visivo della sorgente. Con finitura bianca, nera, cromo, ottone e lenti intercambiabili, Y1 48V è dotato di un sistema di braccio orientabile sull'asse verticale di 360° e orizzontale di 90°, dagli snodi a scomparsa. Ha un output luminoso in grado di valorizzare gli ambienti, grazie alla sorgente retrocessa che garantisce la riduzione dell'abbagliamento, per il massimo comfort visivo. Il proiettore Y1 48V ha sorgente luminosa a LED (COB) CRI >90, 3000K o 2700K (4000K su richiesta) alimentata in corrente continua con convertitore a scomparsa collocato all'interno dell'adattatore del binario.

Y1 48V is a 48V track cylindrical projector for interior spaces with very small dimensions for a minimum visual impact of the source. In a black, white, chromed, brass finish and interchangeable lenses, Y1 48V is fitted with a 360° adjustable arm on the 360° vertical axis and 90° horizontal axis, with incorporated joints. It has a light output which can enhance spaces thanks to the recessed source which guarantees the reduction of dazzling, for maximum visual comfort. The Y1 48V projector has an LED (COB) CRI >90, 3000K or 2700K light source (4000K on request) fed in direct current with incorporated convertor located inside the track adaptor.



CODE COMPOSITION

T048 L 00002		0
		<i>dimmiability</i>
ND	non dimmable	
DA	DALI	
11	1-10V	
		<i>light colour</i>
27	2700K	
30	3000K	
40	4000K	
		<i>lens</i>
22	22°	
50	50°	
		<i>finishing</i>
W1	white	
B1	black	
CP	chromed	
BR	brass	

example of code composition T048 L 00002 W1 22 27 ND 0

TECHNICAL FEATURES

Code	T048 L 00002 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Chromed Brass
Weight	0.4 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 8W
Luminous efficacy	800 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Light colour	White 3000K White 2700K White 4000K (on request)
Voltage connection	48 VDC
CRI	>90
Note	Black tige for Y1 48V chromed and brass.



Z1 48V




Z1 48V è un apparecchio per binari a 48V caratterizzato da un proiettore miniaturizzato di soli 23 mm di diametro, completamente direzionabile sugli assi verticale ed orizzontale. Disponibile con finitura di serie bianca o nera, Z1 48V è un prodotto che garantisce alte prestazioni con il minimo impatto visivo.

Il proiettore Z1 48V ha sorgente luminosa a LED (COB) CRI >90, 3000K o 2700K (4000K su richiesta) alimentata in corrente continua con convertitore a scomparsa collocato all'interno dell'adattatore a binario.

Z1 48V is a 48V track fitting characterised by a miniaturised projector with a diameter of only 23 mm, completely directional on vertical and horizontal axes. Available in a standard white or black finish, Z1 48V is a product which guarantees high performances with a minimum visual impact.

The Z1 48V projector has an LED (COB) CRI >90, 3000K or 2700K light source (4000K on request) fed in direct current with incorporated convertor located inside the track adaptor.



CODE COMPOSITION

T048 L 00003		---	0
		<i>dimmiability</i>	
	ND	non dimmable	
	DA	DALI	
	11	1-10V	
		<i>light colour</i>	
	27	2700K	
	30	3000K	
	40	4000K	
		<i>lens</i>	
	22	22°	
	50	50°	
		<i>finishing</i>	
	W1	white	
	B1	black	

example of code composition T048 L 00003 **W1 22 27 ND** 0

TECHNICAL FEATURES

Code	T048 L 00003 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black
Weight	0.4 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Light colour	White 3000K White 2700K White 4000K (on request)
Voltage connection	48 VDC
CRI	>90
Note	-




M1 48V



M1 48V per binario a 48V è un proiettore con tige completamente direzionabile a 360°, il quale permette di dirigere la luce in modo diretto verso singoli dettagli dello spazio. Dal design minimale, con luce spot, M1 48V è disponibile anche con ottiche differenti. Il proiettore M1 48V ha sorgente luminosa a LED (COB) CRI >90, 3000K o 2700K (4000K su richiesta) alimentata in corrente continua con convertitore a scomparsa collocato all'interno del binario.

M1 48V 48V track fitting is a projector with completely directional 360° linkage, which makes it possible to direct light in a direct way towards individual details of the space. With a minimal design, spotlight, M1 48V is also available with different optics. The M1 48V projector has an LED (COB) CRI >90, 3000K or 2700K light source (4000K on request) fed in direct current with incorporated convertor located inside the track adaptor.

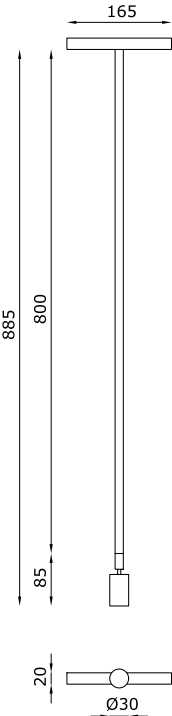

CODE COMPOSITION

T048 L 00004		0
		dimmability
ND	non dimmable	
DA	DALI	
11	1-10V	
		light colour
27	2700K	
30	3000K	
40	4000K	
		lens
22	22°	
50	50°	
		finishing
W1	white	
B1	black	

example of code composition T048 L 00004 **W1 22 27 ND 0**

TECHNICAL FEATURES

Code	T048 L 00004 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black
Weight	0.75 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Light colour	White 3000K White 2700K White 4000K (on request)
Voltage connection	48 VDC
CRI	>90
Note	-




Q1 48V



Proiettore per binario 48V ad alte performance in alluminio verniciato a polvere: Q1 48V è un apparecchio per interni che garantisce il minimo impatto visivo. Completamente orientabile a 360°, è disponibile in più varianti ottiche. Il proiettore Q1 48V ha sorgente luminosa a LED (COB) CRI 90, 3000K o 2700K (4000K su richiesta) alimentata in corrente continua con convertitore a scomparsa collocato all'interno del binario.

48V track projector with high performances in powder varnished aluminium Q1 48V is a fitting for interiors which guarantees minimum visual impact. 360° completely adjustable. It is available in a variety of optics. The Q1 48V projector has an LED (COB) CRI >90, 3000K or 2700K light source (4000K on request) fed in direct current with incorporated convertor located inside the track adaptor.



CODE COMPOSITION

T048 L 00005	---	0	
			<i>dimmiability</i>
		ND	non dimmable
		DA	DALI
		11	1-10V
			<i>light colour</i>
		27	2700K
		30	3000K
		40	4000K
			<i>lens</i>
		12	12°
		24	24°
		38	38°
			<i>finishing</i>
		W1	white
		B1	black


example of code composition T048 L 00005 W1 12 27 ND 0

TECHNICAL FEATURES

Code	T048 L 00005 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black
Weight	0.8 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 12W
Luminous efficacy	1550 lm - 3000K
Light distribution	Beam 24° Beam 12° 38° (on request)
Light colour	White 3000K White 2700K White 4000K (on request)
Voltage connection	48 VDC
CRI	>90
Note	-



Q4 48V

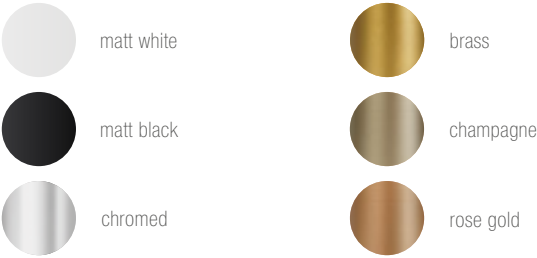


Q4 48V per binario a 48V è un apparecchio per interni che garantisce il minimo impatto visivo, completamente orientabile a 360°, è disponibile in più varianti ottiche.

Proiettore ad alte performance in alluminio disponibile in diverse finiture: nero, bianco, cromo, ottone, champagne e rose gold.

Il proiettore Q4 ha sorgente luminosa a LED (COB) CRI 90, 3000K o 2700K alimentata in corrente continua con convertitore a scomparsa collocato all'interno dell'adattatore a binario.

The Q4 48V 48V track projector is a fitting for interiors which guarantees minimum visual impact. 360° completely adjustable. It is available in a variety of optics. A projector with high performances in aluminium available in various finishes: black, chromed, brass, champagne and rose gold.

The Q4 projector has an LED (COB) CRI >90, 3000K or 2700K light source fed in direct current with incorporated convertor located inside the track.

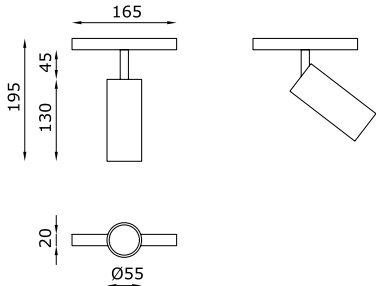

CODE COMPOSITION

T048 L 00008		0
		dimmability
ND	non dimmable	
DA	DALI	
11	1-10V	
		light colour
27	2700K	
30	3000K	
		lens
14	14°	
34	34°	
55	55°	
		finishing
W1	white	
B1	black	
CP	chromed	
BR	brass	
A1	champagne	
A2	rose gold	


example of code composition T048 L 00008 W1 14 27 ND 0

TECHNICAL FEATURES

Code	T048 L 00008 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Chromed Brass Champagne Rose Gold
Weight	0.5 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 9W
Luminous efficacy	850 lm - 3000K
Light distribution	Beam 34° Beam 14° 55° (on request)
Light colour	White 3000K White 2700K
Voltage connection	48 VDC
CRI	>90
Note	Black tige for Q4 48V chromed, brass, champagne and rose gold.



INCISO Q4 48V

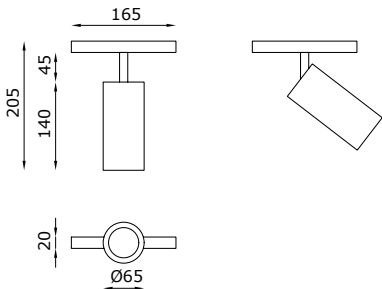

CODE COMPOSITION

T048 L 00016		0
		dimmiability
ND	non dimmable	
DA	DALI	
11	1-10V	
		light colour
27	2700K	
30	3000K	
		lens
14	14°	
34	34°	
55	55°	
		finishing
T1	see texture below	
T2	see texture below	
T3	see texture below	
T4	see texture below	


example of code composition T048 L 00016 T1 14 27 ND 0

TECHNICAL FEATURES

Code	T048 L 00016 XX
Type	Projector ± 360° / ± 90°
Material	DurCoral®
Finishing	T1 T2 T3 T4
Weight	0.6 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 9W
Luminous efficacy	850 lm - 3000K
Light distribution	Beam 34° Beam 14° 55° (on request)
Light colour	White 3000K White 2700K
Voltage connection	48 VDC
CRI	>90
Note	-

INCISO Q4 per binario 48V è un proiettore per interni dalle caratteristiche uniche. Si tratta infatti del primo proiettore in cemento DurCoral® con un'anima in acciaio. INCISO Q4 48V mantiene le stesse caratteristiche tecniche di Q4 48V, ma dal punto di vista estetico l'utilizzo del materiale DurCoral®, permette di plasmare la materia, incidere e creare dei motivi che lo rendono unico nella sua categoria. La ricerca dei materiali che contraddistingue la collezione Buzzi & Buzzi si unisce alla tecnologia IRON per dare vita ad un prodotto innovativo. DurCoral® è un materiale due volte più resistente del cemento, antigraffio, personalizzabile con qualsiasi tipo di pittura e dalle elevate prestazioni meccaniche.

The 48V track INCISO Q4 is a projector for interiors with unique characteristics. In fact it is the first projector made in DurCoral® cement with a steel core. INCISO Q4 48V retains the same technical characteristics as the Q4 48V, but from the aesthetic point of view, the use of DurCoral® allows the material to be moulded and engraved to create patterns that make it unique in its category. The research into the materials that characterise the Buzzi & Buzzi collection combine with the IRON technology to create an innovative product. DurCoral® is a material twice as resistant as cement, scratch-proof, customisable with any type of paint and has high mechanical performances.

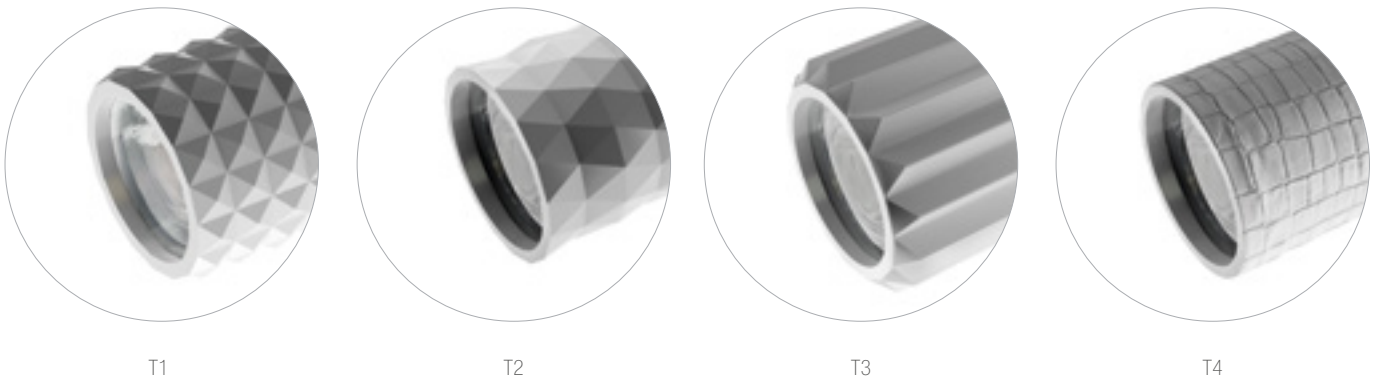




ML 48V



Un punto di vista puntuale, in grado di enfatizzare particolari e spazi esclusivi: ML 48V, apparecchio illuminante da interni per installazione su binario a 48V, è caratterizzato da un connubio di precisione e forza. Il proiettore professionale, dalle alte prestazioni, è studiato per avere il minimo impatto visivo, dotato di braccio direzionabile e inclinabile sull'asse orizzontale e verticale di 360°.

A punctual point of view able to emphasize details and exclusive spaces: ML 48V, installable on 48V rail, is characterized by a combination of precision and strength. The professional projector, capable of high performances, is designed for having a minimal visual impact and is provided with an adjustable arm which can be inclined up to 360° both horizontally and vertically.



CODE COMPOSITION

T048 L 00009		0
		dimmability
ND	non dimmable	
DA	DALI	
11	1-10V	
		light colour
27	2700K	
30	3000K	
		lens
24	24°	
38	38°	
		finishing
W1	white	
B1	black	

example of code composition T048 L 00009 W1 24 27 ND 0

TECHNICAL FEATURES


Code	T048 L 00009 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black
Weight	1 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 26W
Luminous efficacy	3300 lm - 3000K
Light distribution	Beam 24° Beam 38° (on request)
Fitting	-
Light colour	White 3000K White 2700K (on request)
Voltage connection	48 VDC
CRI	>90
Emergency	-
Note	-

GL 48V



GL 48V, apparecchio illuminante da interni per installazione su binario a 48V, è caratterizzato da un connubio di precisione e forza. Il proiettore professionale, dalle alte prestazioni, è studiato per avere il minimo impatto visivo, dotato di braccio direzionabile e inclinabile sull'asse orizzontale e verticale di 360°.

A punctual point of view able to emphasize details and exclusive spaces: GL 48V, installable on 48V rail, is characterized by a combination of precision and strength. The professional projector, capable of high performances, is designed for having a minimal visual impact and is provided with an adjustable arm which can be inclined up to 360° both horizontally and vertically.



CODE COMPOSITION

T048 L 00010 B1	0	
	dimmability	
	ND	non dimmable
	DA	DALI
	11	1-10V
	light colour	
	27	2700K
	30	3000K
	40	4000K
	lens	
	24	24°
	38	38°

example of code composition T048 L 00010 B1 24 27 ND 0

TECHNICAL FEATURES

Code	T048 L 00010 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	Black
Weight	1 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 26W
Luminous efficacy	3600 lm - 3000K
Light distribution	Beam 24° Beam 38° (on request)
Fitting	-
Light colour	White 3000K White 2700K I 4000K (on request)
Voltage connection	48 VDC
CRI	>90
Emergency	-
Note	-

THE TUBE 48V




-  matt white
-  matt black
-  chromed
-  champagne
-  rose gold

MASSIMA POTENZA IN 15 mm DI DIAMETRO.

The Tube 48V è una sospensione dal design minimale per binario 48V. Il suo diametro di soli 15 mm la rendono estremamente discreta ed elegante nelle forme. Disponibile in diverse finiture bianco, nero, cromo, champagne e rose gold. Dotato di sorgente LED di ultima generazione con un output luminoso in grado di far emergere singoli dettagli all'interno dello spazio.

MAXIMUM POWER IN A DIAMETER OF 15 mm.

The Tube 48V is a pendant fitting with minimal design for 48V track. Its diameter of only 15 mm makes it extremely discrete and elegant in shape. Available in various finishes; white, black, chromed, champagne and rose gold. Witted with the latest generation LED source with a light output able to highlight individual details within the space.

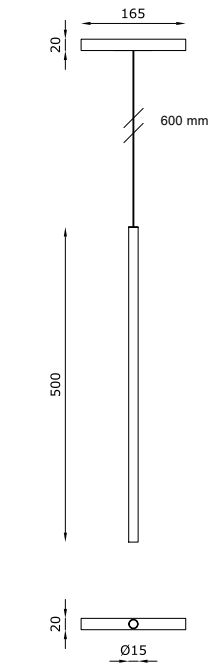

CODE COMPOSITION

T048 L 00011 00 0		
<i>dimmability</i>		
ND	non dimmable	
DA	DALI	
11	1-10V	
<i>light colour</i>		
27	2700K	
30	3000K	
<i>finishing</i>		
W1	white	
B1	black	
CP	chromed	
A1	champagne	
A2	rose gold	


example of code composition T048 L 00011 W1 00 27 ND 0

TECHNICAL FEATURES

Code	T048 L 00011 XX
Type	Suspension lamp
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	0.5 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 4.5W
Luminous efficacy	360 lm - 3000K
Light distribution	Narrow beam
Fitting	-
Light colour	White 3000K White 2700K
Voltage connection	48 VDC
CRI	>90
Emergency	-
Note	Black silicon cable (L 600 mm). On request different lenght.



C1 48V

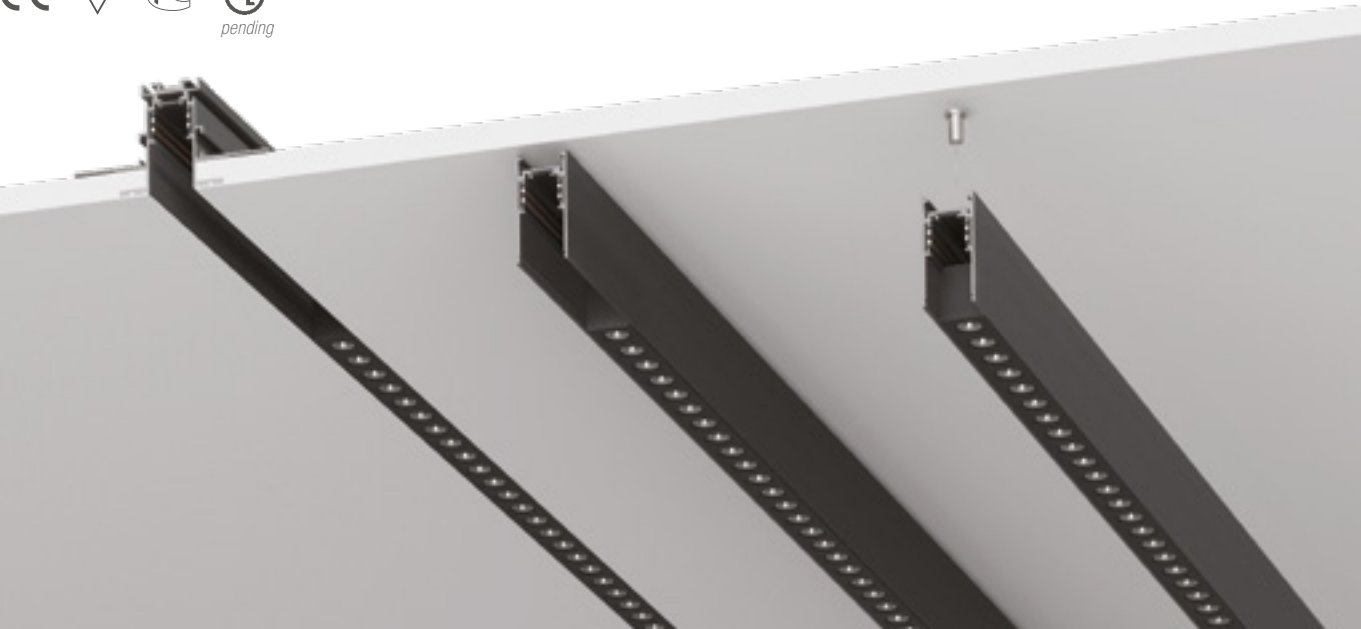


matt black

TOTALMENTE A SCOMPARSA NEI BINARI B-INSIDE E B55

C1 è un modulo LED lineare per ambienti interni, adatto per installazioni su binario 48V per la serie B-INSIDE e B55. È disponibile in due lunghezze (565 mm e 1130 mm) e con tre ottiche differenti (20°, 30° e 26° x 42°) che permettono di illuminare in modo diretto gli spazi. Il prodotto con UGR <15 (lente 20°), <14 (lente 30°) e <18 (lente 26° x 42°) è adatto a tutte le situazioni in cui è richiesto uno specifico antiabbagliamento.

TOTALLY RECESSED INTO THE B-INSIDE AND B55 TRACKS

C1 is a linear LED module for interiors, suitable to be installed on a 48V track for the B-INSIDE and B55 series and with three different lengths (565 mm and 1130 mm) and with three different optics (20°, 30° and 26° x 42°) allowing spaces to be lit directly. The product with UGR <15 (lens 20°), <14 (lens 30°) e <18 (lens 26° x 42°) is suited to all situations in which a specific anti-dazzle effect is required.

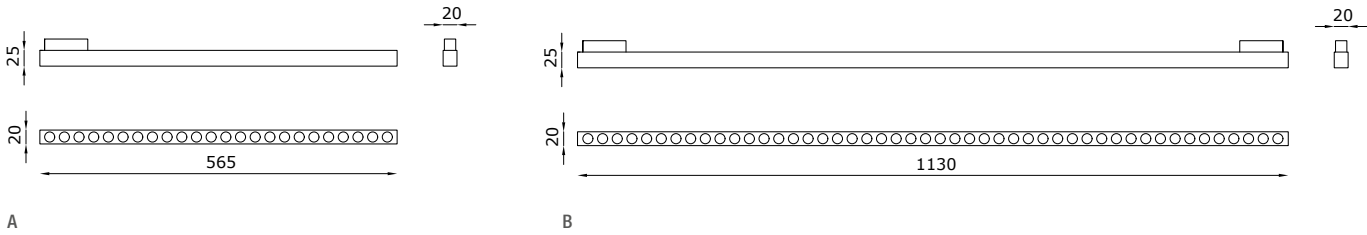

CODE COMPOSITION

T048 L 00012 B1	B1	0		
			<i>dimmiability</i>	
			ND	non dimmable
			DA	DALI
			11	1-10V
			<i>light colour</i>	
			27	2700K
			30	3000K
			40	4000K
			<i>lens</i>	
T048 L 00013 B1	B1	0		
			<i>dimmiability</i>	
			ND	non dimmable
			DA	DALI
			<i>light colour</i>	
			27	2700K
			30	3000K
			40	4000K
			<i>lens</i>	
			20	20°
			<i>dimmiability</i>	
			ND	non dimmable
			DA	DALI
			<i>light colour</i>	
			27	2700K
			30	3000K
			40	4000K
			<i>lens</i>	
			20	20°
			<i>dimmiability</i>	
			ND	non dimmable
			DA	DALI
			<i>light colour</i>	
			27	2700K
			30	3000K
			40	4000K
			<i>lens</i>	
			20	20°


example of code composition T048 L 00012 W1 20 27 ND 0

TECHNICAL FEATURES

Code	T048 L 00012 XX (fig.A)	T048 L 00013 XX (fig.B)
Type	LED module 	LED module
Material	Aluminum	Aluminum
Finishing	Black	Black
Weight	0.4 Kg	0.8 Kg
Mounting	Track 48V	Track 48V
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Electronic driver on board (included)	Electronic driver on board (included)
Lamp type	LED 	LED
Lamp wattage	10W	18W
Luminous efficacy	1200 lm - 3000K	2100 lm - 3000K
Light distribution	Beam 20° Beam 30° 26° x 42° (on request)	Beam 20° Beam 30° 26° x 42° (on request)
Fitting	-	-
Light colour	White 3000K White 2700K White 4000K (on request)	White 3000K White 2700K White 4000K (on request)
Voltage connection	48 VDC	48 VDC
CRI	>90	>90
UGR	<15 (lens 20°) <14 (lens 30°) <18 (lens 26° x 42°)	<15 (lens 20°) <14 (lens 30°) <18 (lens 26° x 42°)
Emergency	-	-
Note	Suitable for B-INSIDE and B-55.	Suitable for B-INSIDE and B-55.



L1 48V

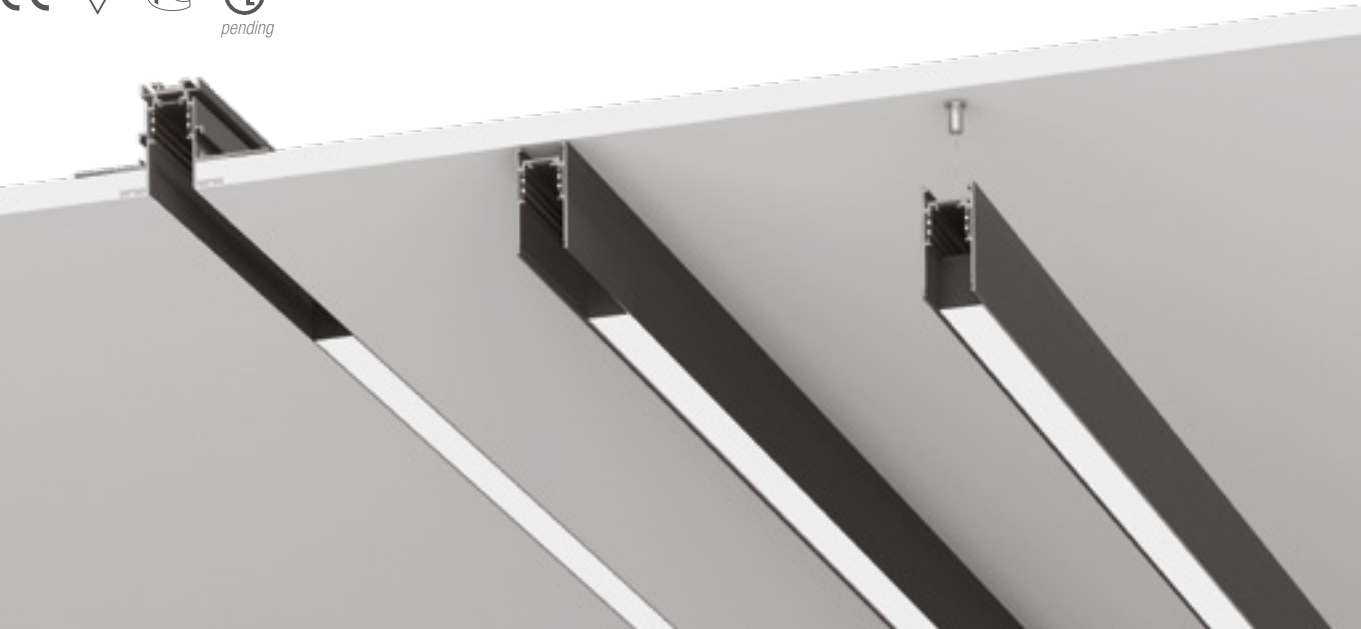


TOTALMENTE A SCOMPARSA NEI BINARI B-INSIDE E B55

L1 è un modulo LED lineare per ambienti interni, adatto per installazioni su binario 48V per la serie B-INSIDE e B55. È disponibile in due lunghezze (565 mm e 1130 mm) e in due finiture diverse (bianco e nero). L1 è composto da LED ad altissima efficienza e uno schermo opale di chiusura che permette una diffusione della luce uniforme nell'ambiente in cui viene installato.

TOTALLY RECESSED INTO THE B-INSIDE AND B55 TRACKS

L1 is a linear LED module for interiors, suitable to be installed on a 48V track for the B-INSIDE and B55 series. It is available in two lengths (565 mm and 1130 mm) and in two different finishes (black and white). L1 is composed of a high efficiency LED and an opal closure screen which diffuses an even light in the space where it is installed.

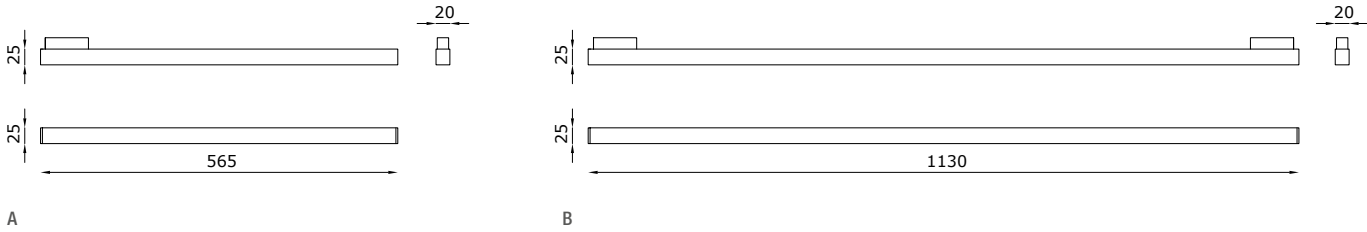

CODE COMPOSITION

T048 L 00014 _00 _0		
<i>dimmability</i>		
ND	non dimmable	
DA	DALI	
<i>light colour</i>		
27	2700K	
30	3000K	
40	4000K	
<i>finishing</i>		
W1	white	
B1	black	

T048 L 00015 _00 _0		
<i>dimmability</i>		
ND	non dimmable	
DA	DALI	
11	1-10V	
<i>light colour</i>		
27	2700K	
30	3000K	
40	4000K	
<i>finishing</i>		
W1	white	
B1	black	

example of code composition T048 L 00014 W1 00 27 ND 0

TECHNICAL FEATURES


Code	T048 L 00014 XX (fig.A)	T048 L 00015 XX (fig.B)
Type	LED module	LED module
Material	Aluminum	Aluminum
Finishing	White Black	White Black
Weight	0.4 Kg	0.8 Kg
Mounting	Track 48V	Track 48V
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Electronic driver on board (included)	Electronic driver on board (included)
Lamp type	LED	LED
Lamp wattage	12W	24W
Luminous efficacy	1500 lm - 3000K	3000 lm - 3000K
Light distribution	Opal screen diffused	Opal screen diffused
Fitting	-	-
Light colour	White 3000K White 2700K White 4000K (on request)	White 3000K White 2700K White 4000K (on request)
Voltage connection	48 VDC	48 VDC
CRI	>90	>90
UGR	<29	<29
Emergency	-	-
Note	Suitable for B-INSIDE and B-55.	Suitable for B-INSIDE and B-55.




76
82
90

B-INSIDE
B30
B55

48V
TRACKS

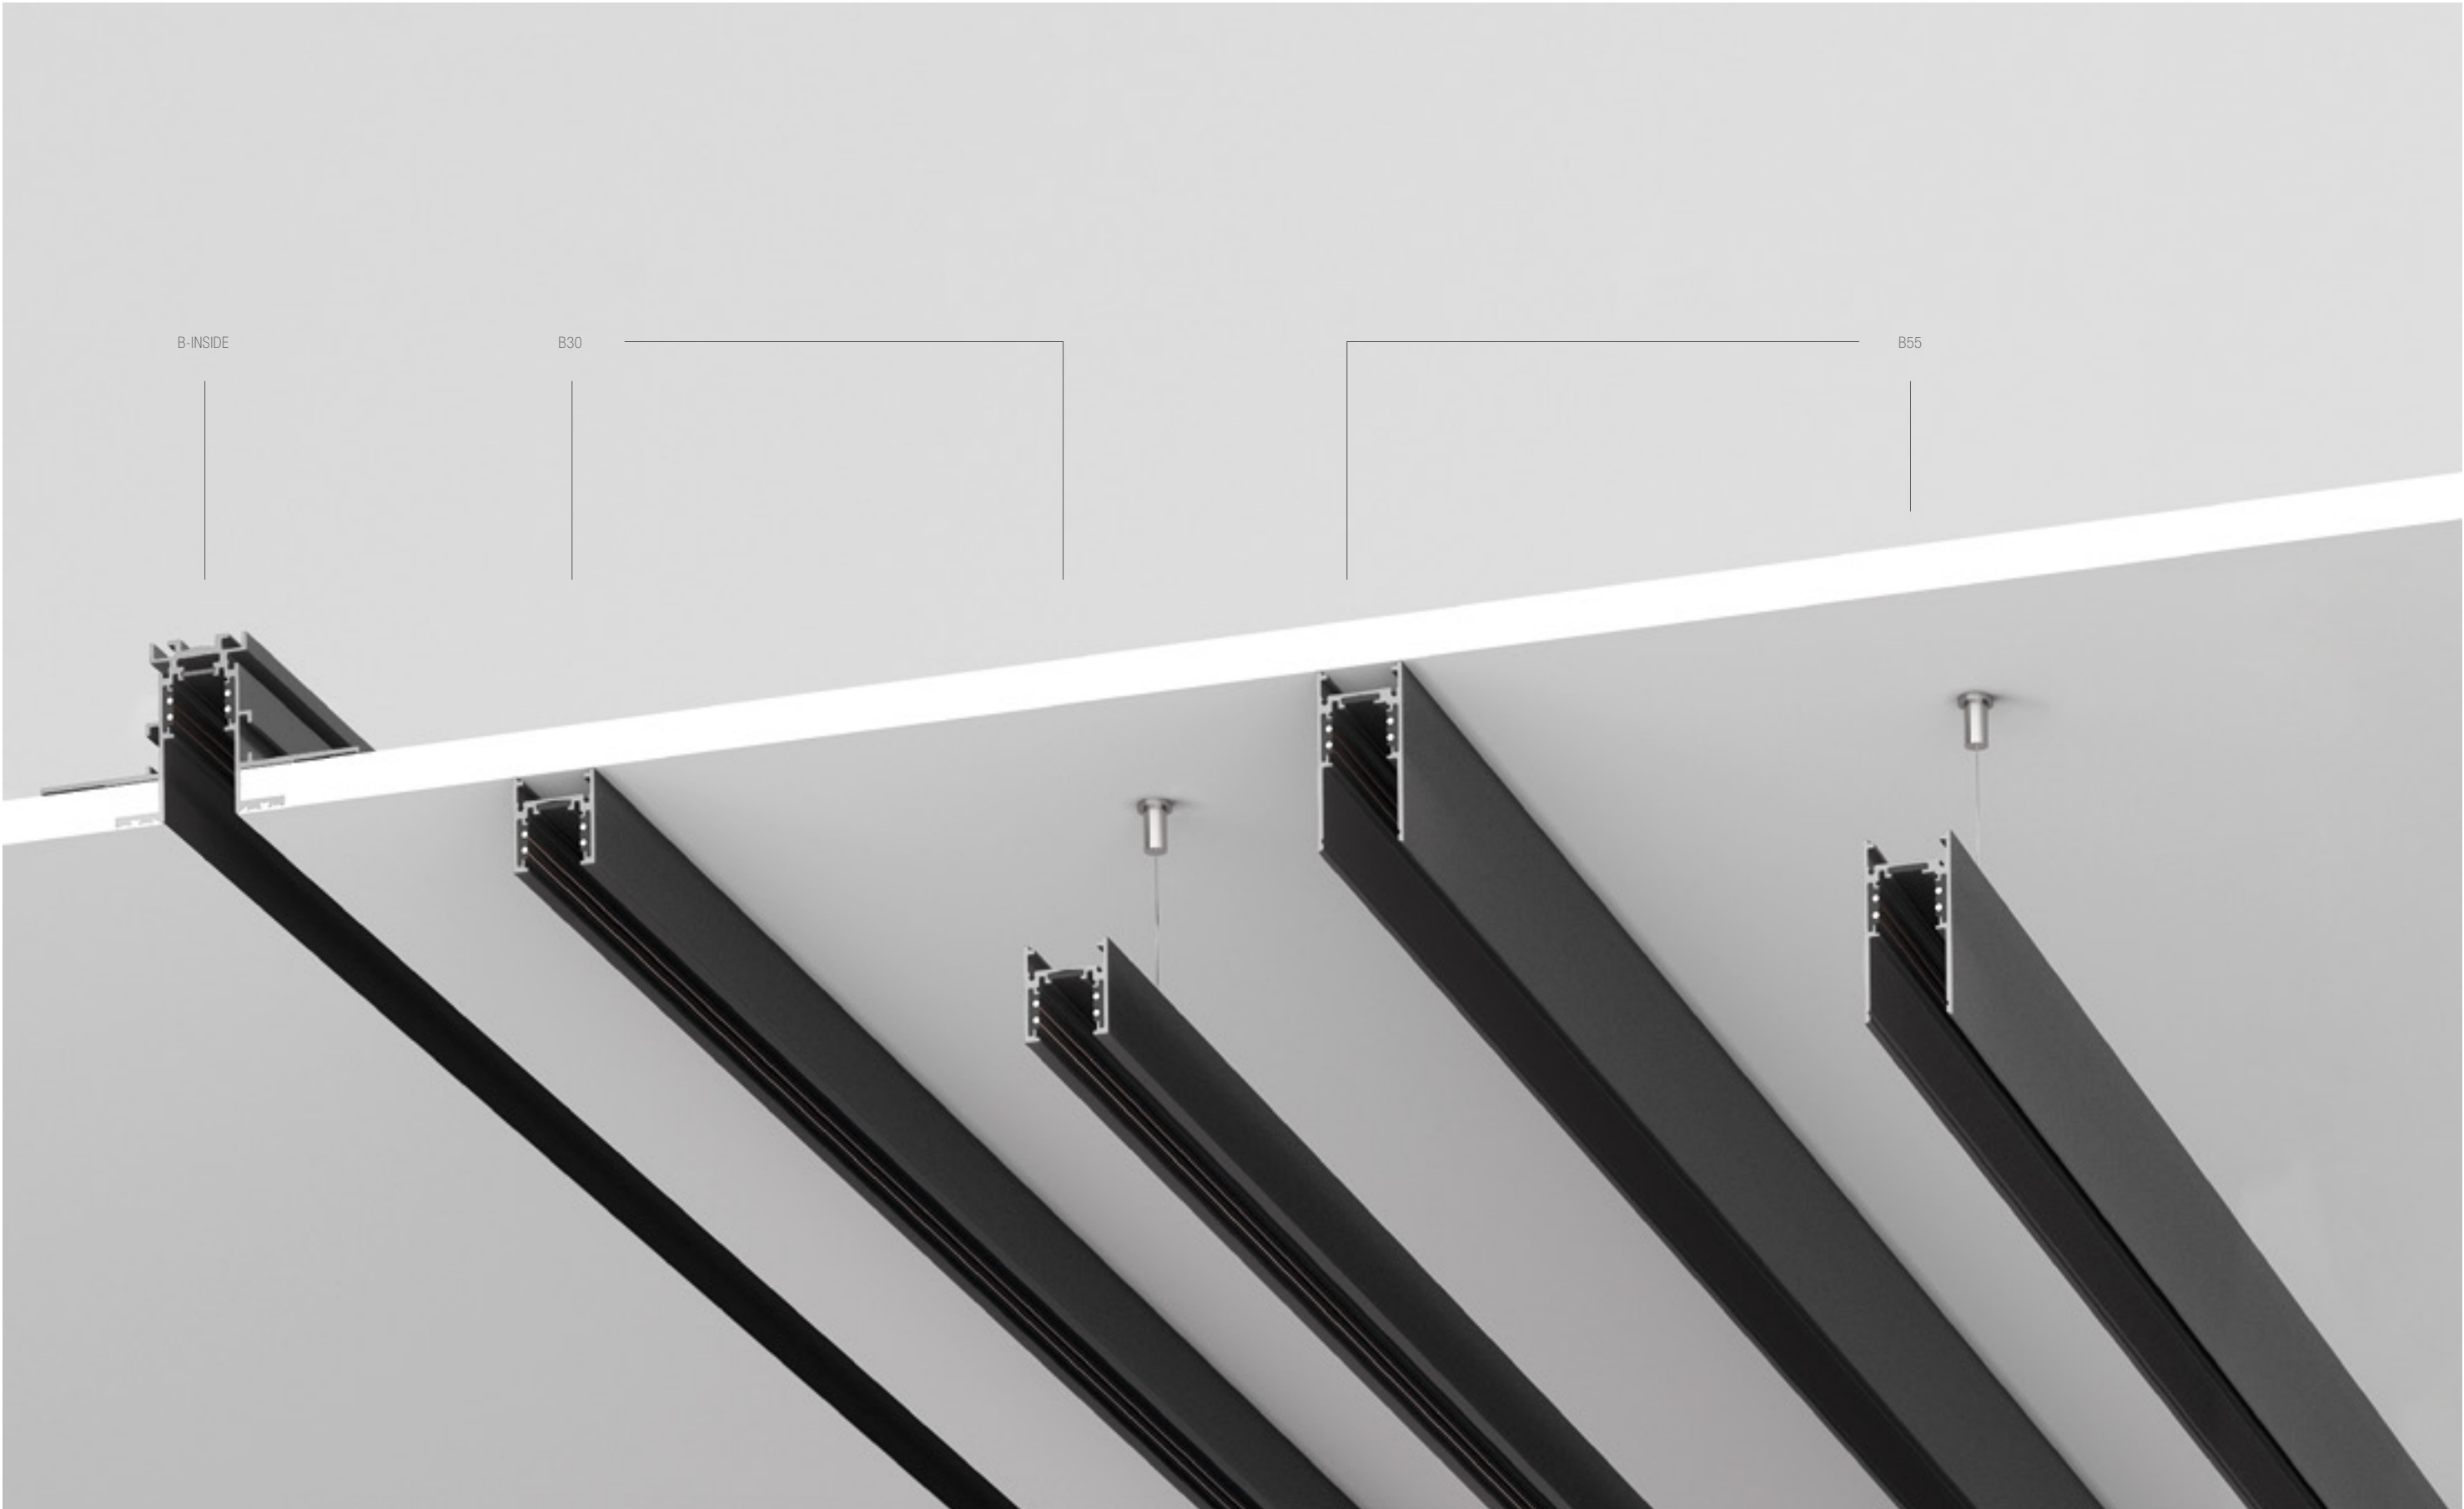

B-INSIDE

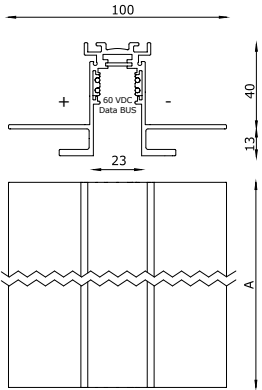

matt black RAL 9005 painted

LIGHT MODULES



C1 48V 64 GL 48V 58 INCISO Q4 48V 52 L1 48V 68



M1 48V 40 ML 48V 56 Q1 48V 44 Q4 48V 48



THE TUBE 48V 60 U1 48V 26 X1 48V 28 Y1 48V 32



Z1 48V 36

Sistema di illuminazione da interno per installazione a incasso. Binario e corpi sono gestibili con sistemi di controllo remoto DALI e 1-10V. Il profilo ha lunghezza compresa fra 1 m e 3 m, estruso in alluminio nero e dotato di conduttori 48V. B-INSIDE a 48V si completa a sua volta con tutti i prodotti di illuminazione Buzzi & Buzzi dotati di attacchi con un'elettronica integrata.

È vietato utilizzare alimentatori, driver, sistemi Bus Dati e componenti non omologati SELV e/o che abbiano una U-OUT > 60Vdc. Si raccomanda l'utilizzo di un ripetitore optoisolato DALI compatibile per rendere compatibile un comando FELV in SELV (vedi codice: T048 A 00078 00).

A lighting system for interiors to be flush-mounted. The track and structures can be managed by remote DALI and 1-10V control systems. The profile has a length of between 1 m and 3 m, extruded in black aluminium and fitted with 48V leads. The 48V B-INSIDE is, in turn, completed with all the Buzzi & Buzzi products fitted with sockets with integrated electronics.

The use of NON SELV or U-OUT > 60Vdc power supplies, drivers and components is strictly forbidden.

Is recommended the usage of an opto-insulated repeater DALI to convert FELV into SELV (code: T048 A 00078 00).

CODE COMPOSITION

T048 T 00 B1 0 _ 1		
	length	
	01	1000 mm
	02	2000 mm
example of code composition	03	3000 mm
	T048 T 00 B1 0 01 1	

TECHNICAL FEATURES

Code	T048 T 00 XX
Type	Low voltage track
Material	Aluminum
Finishing	Black RAL 9005
Weight	-
Mounting	Recessed
IP rating	-
Insulation class	III
Control gear	Remote power supply (not included)
Dimensions	A: 1000 mm 2000 mm 3000 mm
Cut out for plasterboard	57 mm x A
Voltage connection	48 VDC
Circuits	2 x ±15 A · 48 VDC 1 x ±15 A · 48 VDC + D+/D-
Note	The supply connectors, plugs and further fixture accessories must be ordered separately.
	Any 90° connector must be ordered separately to ensure electric continuity in the corners.
	Light points cannot be installed in the corners.

TESTATA
DI ALIMENTAZIONE
POWER HEAD




CODE COMPOSITION

T048 A 00002 B1

TECHNICAL FEATURES

Code	T048 A 00002 B1
Type	Non-polarised power head
Material	Polycarbonate
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	15 A max · 48 VDC
Note	-



GIUNTO PASSANTE
THROUGH JOINT



CODE COMPOSITION

T048 A 00004 B1

TECHNICAL FEATURES

Code	T048 A 00004 B1
Type	Non-polarised through joint
Material	Polycarbonate
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	15 A max · 48 VDC
Note	Used to connect two tracks and to guarantee the supply of current.



GIUNTO ANGOLARE A 90°
90° CORNER JOINT




CODE COMPOSITION

T048 A 00006 B1

TECHNICAL FEATURES

Code	T048 A 00006 B1
Type	Non-polarised 90° corner joint
Material	Polycarbonate
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	15 A max · 48 VDC
Note	Used to connect two tracks joined at 90° and to guarantee that current reaches the corners. Light points cannot be installed in the corners.



GIUNTO FLESSIBILE
FLEXIBLE JOINT




CODE COMPOSITION

T048 A 00008 B1

TECHNICAL FEATURES

Code	T048 A 00008 B1
Type	Flexible joint
Material	Polycarbonate
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	15 A max · 48 VDC
Note	Used to connect two tracks installed on different surfaces (ceiling-wall) or to create different angles from 90° and to guarantee power supply. Light points cannot be installed in the corners.



KIT SOSPENSIONE
SUSPENSION KIT




CODE COMPOSITION

T048 A 00025 00

TECHNICAL FEATURES

Code	T048 A 00025 00
Type	Suspension kit
Material	Steel
Finishing	-
Fixing	-
Note	The kit is to be used when the B-INSIDE track is fitted before installing the plaster panel. Kit composed of ceiling fixture bracket, M4 nut, threaded M6 bar 1000 mm long, suspension clip in steel with M6 screw coupling.



STAFFA DI RINFORZO
REINFORCEMENT BRACKET




CODE COMPOSITION


T048 A 00023 B1

TECHNICAL FEATURES

Code	T048 A 00023 B1
Type	Reinforcement bracket
Material	Aluminum
Finishing	Black RAL 9005 
Fixing	By screws
Note	Reinforcement bracket used to give rigidity to the joint of the tracks and to prevent mechanical vibrations. We recommend using three brackets at every track joint.



TRONCHESE
CUTTER




CODE COMPOSITION

TRK 00000 42

TECHNICAL FEATURES

Code	TRK 00000 42
Type	Conductor cutting pliers
Material	-
Finishing	-
Fixing	-
Note	The 1000/2000/3000 mm long tracks are supplied with copper wires already tested with respect to the aluminium in order to prevent the copper terminals from coming into contact with each other, in the case of double power supply, or, to prevent them from touching each other, if closure plugs are used. If it should be necessary to shorten the length of the track during installation, use the special cutting nippers taking care to pull out the four wires by at least 5 mm to guarantee correct electric distances.



KIT GIUNTO MECCANICO
ANGOLARE ORIZZONTALE
HORIZONTAL CORNER JOINT KIT




CODE COMPOSITION

T048 A 00079 B1

TECHNICAL FEATURES

Code	T048 A 00079 B1
Type	Trimless joint for use on the same flat surface
Material	Aluminium body
Finishing	Black RAL 9005 
Fixing	By 2 brackets (included)
Note	The mechanical corner joint allows to join two B-INSIDE tracks with 90°angle avoiding the 45°cut. Is necessary to be associated to T048 A 00008 B1 code to allow electrical and signal continuity. The code includes 2 brackes for fixing.



KIT GIUNTO MECCANICO
ANGOLARE VERTICALE
INTERNO
INTERNAL VERTICAL CORNER
JOINT KIT




CODE COMPOSITION


T048 A 00072 B1

TECHNICAL FEATURES

Code	T048 A 00072 B1
Type	Trimless joint for use between ceiling-wall and wall-wall
Material	Aluminium body
Finishing	Black RAL 9005 
Fixing	By 2 brackets (included)
Note	The mechanical corner joint allows to join two B-INSIDE tracks with 90°angle (ceiling-wall and wall-wall) avoiding the 45°cut. Is necessary to be associated to T048 A 00008 B1 code to allow electrical and signal continuity. The code includes 2 brackes for fixing.



KIT GIUNTO MECCANICO
ANGOLARE VERTICALE
ESTERNO
EXTERNAL VERTICAL CORNER
JOINT KIT




CODE COMPOSITION

T048 A 00071 B1

TECHNICAL FEATURES

Code	T048 A 00071 B1
Type	Trimless joint for use between ceiling-wall and wall-wall
Material	Aluminium body
Finishing	Black RAL 9005 
Fixing	By 2 brackets (included)
Note	The mechanical corner joint allows to join two B-INSIDE tracks with 90°angle avoiding the 45°cut. Is necessary to be associated to T048 A 00008 B1 code to allow electrical and signal continuity. The code includes 2 brackes for fixing.



TAPPO DI CHIUSURA
CLOSURE PLUG




CODE COMPOSITION


T048 A 00012 B1

TECHNICAL FEATURES

Code	T048 A 00012 B1
Type	Closure plug
Material	Polycarbonate
Finishing	Black RAL 9005 
Fixing	By screws (included)
Note	-



TAPPO DI CHIUSURA
FORATO
HOLED CLOSURE PLUG




CODE COMPOSITION

T048 A 00016 B1

TECHNICAL FEATURES

Code	T048 A 00016 B1
Type	Closure plug with hole for cable passage
Material	Polycarbonate
Finishing	Black RAL 9005 
Fixing	By screws (included)
Note	-



ALIMENTATORE
POWER SUPPLY




CODE COMPOSITION

T048 A 000_00	
	<i>max wattage</i>
96	75W
97	150W
60	240W
example of code composition	T048 A 000 96 00

TECHNICAL FEATURES

Code	T048 A XX
Type	Constant voltage driver
Material	-
Finishing	-
Fixing	-
Insulation class	-
Voltage connection	220-240V 50/60Hz · 48 VDC
Max wattage	75W 150W 240W
Note	-

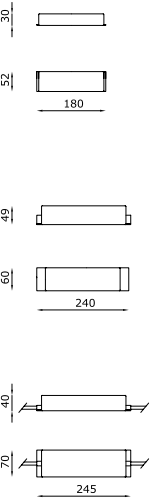

RIPETITORE
OPTOISOLATO DALI
OPTO-INSULATED
REPEATER DALI




CODE COMPOSITION

T048 A 00078 00

TECHNICAL FEATURES

Code	T048 A 00078 00
Type	DALI signal repeater and regenerator
Material	-
Finishing	-
Fixing	-
Insulation class	-
Voltage connection	48 VDC
Max wattage	-
Note	The device makes the DALI FELV signal compatible with the Buzzi & Buzzi 48V track system, making it SELV.



DALI GATE 48V
DALI GATE 48V




CODE COMPOSITION



T048 A 00073 B1

TECHNICAL FEATURES

Code	T048 A XX
Type	DALI Gate Bluetooth®
Material	-
Finishing	Black RAL 9005 
Fixing	-
Insulation class	-
Voltage connection	220-240V · 50/60Hz · 48 VDC
Max wattage	6W
Note	DALI GATE Casambi has been designed and developed to control lamps with DALI drivers using the Casambi app, installed on mobile devices. The Casambi app communicates with DALI GATE by means of Bluetooth® technology. The received signal is then adequately interpreted to generate the corresponding command on the DALI bus. Up to 64 lamps (control gear) can be programmed, assigning them to up to 8 groups. It must be the only DALI master on the bus (MONO MASTER bus).



B30



- matt white RAL 9016 painted
- matt black RAL 9005 painted

LIGHT MODULES

C1 48V
64

GL 48V
58

INCISO Q4 48V
52

L1 48V
68

M1 48V
40

ML 48V
56

Q1 48V
44

Q4 48V
48

THE TUBE 48V
60

U1 48V
26

X1 48V
28

Y1 48V
32

Z1 48V
36

Sistema di illuminazione da interno, per installazione a sospensione e a superficie. Binario e corpi sono gestibili con sistemi di controllo remoto DALI e 1-10V. Il profilo ha lunghezza compresa fra 1 m e 3 m, estruso in alluminio con due finiture bianco e nero, è dotato di conduttori 48V. B30 a 48V si completa a sua volta con tutti i prodotti di illuminazione Buzzi & Buzzi dotati di attacchi con un'elettronica integrata. È vietato utilizzare alimentatori, driver, sistemi Bus Dati e componenti non omologati SELV e/o che abbiano una U-OUT > 60Vdc. Si raccomanda l'utilizzo di un ripetitore optoisolato DALI compatibile per rendere compatibile un comando FELV in SELV (vedi codice: T048 A 00078 00).

Lighting system for interiors, for pendant and surface installation. Track and structures can be managed by DALI and 1-10V remote control systems. The length of the profile is between 1 and 3 m, extruded in aluminium with two white and black finishes, it is fitted with 48V wires. The 48V B30 is in turn completed with all the Buzzi and Buzzi lighting products equipped with sockets with integrated electronics. The use of NON SELV or U-OUT > 60Vdc power supplies, drivers and components is strictly forbidden. Is recommended the usage of an opto-insulated repeater DALI to convert FELV into SELV (code: T048 A 00078 00).

CODE COMPOSITION

T048 T 01	_ 1 _ 1			
		<i>length</i>		
		01	1000 mm	
			02	2000 mm
			03	3000 mm
	<i>finishing</i>			
			W1	white RAL 9016
			B1	black RAL 9005
	example of code composition		T048 T 01	W1 1 01 1

TECHNICAL FEATURES

Code	T048 T 01 XX
Type	Low voltage track
Material	Aluminum
Finishing	White RAL 9016 Black RAL 9005
Weight	-
Mounting	Surface Suspension
IP rating	-
Insulation class	III
Control gear	Remote power supply (not included)
Dimensions	A: 1000 mm 2000 mm 3000 mm
Cut out for plasterboard	-
Voltage connection	48 VDC
Circuits	2 x ±15 A · 48 VDC 1 x ±15 A · 48 VDC + D+/D-
Note	B30 is a 48V powered electrical system and limited to a maximum current of 15 A. The supply connectors, plugs and further fixture accessories must be ordered separately. Any 90° connector must be ordered separately to ensure electric continuity in the corners. Light points cannot be installed in the corners. For ceiling or wall mounting, it's possible to fix the rail directly with self-tapping countersunk head screws, while the suspended installation requires the purchase of the specific kit.

TESTATA
DI ALIMENTAZIONE
POWER HEAD



CODE COMPOSITION

T048 A 000_	finishing	
	01 W1	white RAL 9016
	02 B1	black RAL 9005

example of code composition T048 A 00001 W1

TECHNICAL FEATURES

Code	T048 A XX
Type	Non-polarised power head
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	15 A max · 48 VDC
Note	-



GIUNTO PASSANTE
THROUGH JOINT




CODE COMPOSITION

T048 A 000_	finishing	
	03 W1	white RAL 9016
	04 B1	black RAL 9005

example of code composition T048 A 00003 W1

TECHNICAL FEATURES

Code	T048 A XX
Type	Non-polarised through joint
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	15 A max · 48 VDC
Note	Used to connect two tracks and to guarantee the supply of current.



GIUNTO ANGOLARE A 90°
90° CORNER JOINT




CODE COMPOSITION

T048 A 000_	finishing	
	05 W1	white RAL 9016
	06 B1	black RAL 9005

example of code composition T048 A 00005 W1

TECHNICAL FEATURES

Code	T048 A XX
Type	Non-polarised 90° corner joint
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	15 A max · 48 VDC
Note	Used to connect two tracks joined at 90° and to guarantee that current reaches the corners. Light points cannot be installed in the corners.



GIUNTO FLESSIBILE
FLEXIBLE JOINT




CODE COMPOSITION

T048 A 000_	finishing	
	07 W1	white RAL 9016
	08 B1	black RAL 9005

example of code composition T048 A 00007 W1

TECHNICAL FEATURES

Code	T048 A XX
Type	Flexible joint
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	15 A max · 48 VDC
Note	Used to connect two tracks installed on different surfaces (ceiling-wall) or to create different angles from 90° and to guarantee power supply. Light points cannot be installed in the corners.



GIUNTO ELETTRICO
PER CONNESSIONE A “T”
ELECTRICAL T-JOINT




CODE COMPOSITION

T048 A 000_	finishing	
	85 W2	white RAL 9010
	84 B1	black RAL 9005

example of code composition T048 A 000XX W1

TECHNICAL FEATURES

Code	T048 A XX
Type	Non-polarised “T” joint
Material	Polycarbonate + 2 cover in PMMA
Finishing	White RAL 9016  Black RAL 9005 
Fixing	Snap-in fixing
Insulation class	III
Voltage connection	15 A max · 48 VDC
Note	Used to connect three tracks joined with a “T” junction and to guarantee that current reaches the corners. Light points cannot be installed in the corners.



GIUNTO ELETTRICO
PER CONNESSIONE A “X”
ELECTRICAL X-JOINT




CODE COMPOSITION

T048 A 000_	finishing	
	87 W2	white RAL 9010
	86 B1	black RAL 9005

example of code composition T048 A 000XX W1

TECHNICAL FEATURES

Code	T048 A XX
Type	Non-polarised “X” joint
Material	Polycarbonate + 3 cover in PMMA
Finishing	White RAL 9016  Black RAL 9005 
Fixing	Snap-in fixing
Insulation class	III
Voltage connection	15 A max · 48 VDC
Note	Used to connect three tracks joined with a “X” junction and to guarantee that current reaches the corners. Light points cannot be installed in the corners.



KIT SOSPENSIONE
E GIUNZIONE
SUSPENSION
AND JUNCTION KIT




CODE COMPOSITION

T048 A 00024 00

TECHNICAL FEATURES

Code	T048 A 00024 00
Type	Suspension and junction kit
Material	Steel
Finishing	-
Fixing	-
Note	Kit composed of metallic spherical rose, steel cable Ø 1.5 mm and automatic screw coupling attached to the bracket. Cable length 3 m (on request different lengths are available). Position the fixture kit with an inter-axis of 450 mm for a max capacity of 50 kg, or 900 mm for max 25 kg.



TRONCHESE
CUTTER



CODE COMPOSITION

TRK 00000 42

TECHNICAL FEATURES

Code	TRK 00000 42
Type	Conductor cutting pliers
Material	-
Finishing	-
Fixing	-
Note	The 1000/2000/3000 mm long tracks are supplied with copper wires already tested with respect to the aluminium in order to prevent the copper terminals from coming into contact with each other, in the case of double power supply, or, to prevent them from touching each other, if closure plugs are used. If it should be necessary to shorten the length of the track during installation, use the special cutting nippers taking care to pull out the four wires by at least 5 mm to guarantee correct electric distances.



CONNESSIONE MECCANICA
PER ANGOLO 90°
90° MECHANICAL
CONNECTION




CODE COMPOSITION

T048 A 000_	<i>finishing</i>	
	19 W1	white RAL 9016
	20 B1	black RAL 9005


example of code
composition T048 A 00019 W1

TECHNICAL FEATURES

Code	T048 A XX
Type	90° corner joint cover
Material	Aluminum body, steel bracket
Finishing	White RAL 9016  Black RAL 9005 
Fixing	By screws
Note	The 90° corner joint allows the mechanical connection of the tracks, forming a 90° angle, without cutting them at 45°.



GIUNTO MECCANICO A “T”
MECHANICAL T-JOINT




CODE COMPOSITION

T048 A 000_	<i>finishing</i>	
	92 W1	white RAL 9016
	91 B1	black RAL 9005


example of code
composition T048 A 00091 B1

TECHNICAL FEATURES

Code	T048 A XX
Type	Surface/suspended joint
Material	Polyamide body and steel bracket
Finishing	White RAL 9016  Black RAL 9005 
Fixing	By screws (not included)
Note	The “T” joint allows the mechanical connection of three B30 tracks forming a “T” cross. It's necessary to be associated to T048 A 00084 B1 or T048 A 00085 W2 code to allow electrical and signal continuity.



GIUNTO MECCANICO A “X”
MECHANICAL X-JOINT




CODE COMPOSITION

T048 A 000_	<i>finishing</i>	
	94 W1	white RAL 9016
	93 B1	black RAL 9005

example of code
composition T048 A 00093 B1

TECHNICAL FEATURES

Code	T048 A XX
Type	Surface/suspended joint
Material	Polyamide body and steel bracket
Finishing	White RAL 9016  Black RAL 9005 
Fixing	By screws (not included)
Note	The “X” joint allows the mechanical connection of three B30 tracks forming a “X” cross. It's necessary to be associated to T048 A 00086 B1 or T048 A 00087 W2 code to allow electrical and signal continuity.



TAPPO DI CHIUSURA
CLOSURE PLUG




CODE COMPOSITION

T048 A 000_	<i>finishing</i>	
	09 W1	white RAL 9016
	10 B1	black RAL 9005


example of code
composition T048 A 00009 W1

TECHNICAL FEATURES

Code	T048 A XX
Type	Closure plug
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	By screws (included)
Note	-



TAPPO DI CHIUSURA
FORATO
HOLED CLOSURE PLUG




CODE COMPOSITION

T048 A 000_	<i>finishing</i>	
	13 W1	white RAL 9016
	14 B1	black RAL 9005

example of code
composition T048 A 00013 W1

TECHNICAL FEATURES

Code	T048 A XX
Type	Closure plug with hole for cable passage
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	By screws (included)
Note	-



COVER DI CHIUSURA
CLOSING COVER




CODE COMPOSITION

T048 A 000_	<i>length and finishing</i>	
	75 W1	3000 mm white RAL 9016
	76 B1	3000 mm black RAL 9005

example of code
composition T048 A 00076 B1

TECHNICAL FEATURES

Code	T048 A XX
Type	Aesthetic closing cover
Material	PMMA
Finishing	White RAL 9016  Black RAL 9005 
Fixing	-
Note	Cover installable at the bottom between the various spotlights, to hide the inside of the track and to allow aesthetic continuity.



CASSETTA
PER ALIMENTATORE
SUPPLY BOX




CODE COMPOSITION

T048 A 000_	<i>finishing</i>	
	58 W1	white RAL 9016
	59 B1	black RAL 9005

example of code
composition T048 A 00058 W1

TECHNICAL FEATURES

Code	T048 A XX
Type	48V supply box
Material	Steel
Finishing	White RAL 9016  Black RAL 9005 
Fixing	By screws
Insulation class	-
Voltage connection	-
Note	The purpose of the supply box attached to the surface is to house the driver in all those situations in which a remote driver cannot be used.



ALIMENTATORE
POWER SUPPLY




CODE COMPOSITION

T048 A 000_00	<i>max wattage</i>	
	96	75W
	97	150W
	60	240W

example of code
composition T048 A 00096 00

TECHNICAL FEATURES

Code	T048 A XX
Type	Constant voltage driver
Material	-
Finishing	-
Fixing	-
Insulation class	-
Voltage connection	220-240V 50/60Hz - 48 VDC
Max wattage	75W 150W 240W
Note	-



RIPETITORE
OPTOISOLATO DALI
OPTO-INSULATED
REPEATER DALI




CODE COMPOSITION

T048 A 00078 00

TECHNICAL FEATURES

Code	T048 A 00078 00
Type	DALI signal repeater and regenerator
Material	-
Finishing	-
Fixing	-
Insulation class	-
Voltage connection	48 VDC
Max wattage	-
Note	The device makes the DALI FELV signal compatible with the Buzzi & Buzzi 48V track system, making it SELV.



DALI GATE 48V
DALI GATE 48V




CODE COMPOSITION

T048 A 000	
	finishing
77 W1	white RAL 9016
73 B1	black RAL 9005



example of code composition
T048 A 00077 W1

TECHNICAL FEATURES

Code	T048 A XX
Type	Dali Gate Bluetooth®
Material	-
Finishing	White Black
Fixing	-
Insulation class	-
Voltage connection	220-240V · 50/60Hz · 48 VDC
Max wattage	6W
Note	DALI GATE Casambi has been designed and developed to control lamps with DALI drivers using the Casambi app, installed on mobile devices. The Casambi app communicates with DALI GATE by means of Bluetooth® technology. The received signal is then adequately interpreted to generate the corresponding command on the DALI bus. Up to 64 lamps (control gear) can be programmed, assigning them to up to 8 groups. It must be the only DALI master on the bus (MONO MASTER bus).



B55



-  matt white RAL 9016 painted
-  matt black RAL 9005 painted

LIGHT MODULES



C1 48V
64



GL 48V
58



INCISO Q4 48V
52



L1 48V
68



M1 48V
40



ML 48V
56



Q1 48V
44



Q4 48V
48



THE TUBE 48V
60



U1 48V
26



X1 48V
28



Y1 48V
32



Z1 48V
36

Sistema di illuminazione da interno, per installazione a sospensione e a superficie. Binario e corpi sono gestibili con sistemi di controllo remoto DALI e 1-10V. Il profilo ha lunghezza compresa fra 1 m e 3 m, estruso in alluminio con due finiture bianco e nero, è dotato di conduttori 48V. B55 a 48V si completa a sua volta con tutti i prodotti di illuminazione Buzzi & Buzzi dotati di attacchi con un'elettronica integrata. È vietato utilizzare alimentatori, driver, sistemi Bus Dati e componenti non omologati SELV e/o che abbiano una U-OUT > 60Vdc. Si raccomanda l'utilizzo di un ripetitore optoisolato DALI compatibile per rendere compatibile un comando FELV in SELV (vedi codice: T048 A 00078 00).

Lighting system for interiors, for pendant and surface installation. Track and structures can be managed by DALI and 1-10V remote control systems. The length of the profile is between 1 and 3 m, extruded in aluminium with two white and black finishes, it is fitted with 48V wires. The 48V B30 is in turn completed with all the Buzzi and Buzzi lighting products equipped with sockets with integrated electronics. The use of NON SELV or U-OUT > 60Vdc power supplies, drivers and components is strictly forbidden. Is recommended the usage of an opto-insulated repeater DALI to convert FELV into SELV (code: T048 A 00078 00).

CODE COMPOSITION

T048 T 02	1	1			
			<i>length</i>		
			01	1000 mm	
				02	2000 mm
				03	3000 mm
			<i>finishing</i>		
				W1	white RAL 9016
			B1	black RAL 9005	
example of code composition					
T048 T 02 W1 1 01 1					

TECHNICAL FEATURES

Code	T048 T 02 XX
Type	Low voltage track
Material	Aluminum
Finishing	White RAL 9016 Black RAL 9005
Weight	-
Mounting	Surface Suspension
IP rating	-
Insulation class	III
Control gear	Remote power supply (not included)
Dimensions	A: 1000 mm 2000 mm 3000 mm
Cut out for plasterboard	-
Voltage connection	48 VDC
Circuits	2 x ±15 A · 48 VDC 1 x ±15 A · 48 VDC + D+/D-
Note	B55 is a 48V powered electrical system and limited to a maximum current of 15 A. The supply connectors, plugs and further fixture accessories must be ordered separately. Any 90° connector must be ordered separately to ensure electric continuity in the corners. Light points cannot be installed in the corners. For ceiling or wall mounting, it's possible to fix the rail directly with self-tapping countersunk head screws, while the suspended installation requires the purchase of the specific kit.

TESTATA
DI ALIMENTAZIONE
POWER HEAD



CODE COMPOSITION

T048 A 000_			finishing	
01	W1	white	RAL 9016	
02	B1	black	RAL 9005	

example of code composition T048 A 00001 W1

TECHNICAL FEATURES

Code	T048 A XX	
Type	Non-polarised power head	
Material	Polycarbonate	
Finishing	White RAL 9016	
	Black RAL 9005	
Fixing	Plug-in	
Insulation class	III	
Voltage connection	15 A max · 48 VDC	
Note	-	



GIUNTO PASSANTE
THROUGH JOINT




CODE COMPOSITION

T048 A 000_			finishing	
03	W1	white	RAL 9016	
04	B1	black	RAL 9005	

example of code composition T048 A 00003 W1

TECHNICAL FEATURES

Code	T048 A XX	
Type	Non-polarised through joint	
Material	Polycarbonate	
Finishing	White RAL 9016	
	Black RAL 9005	
Fixing	Plug-in	
Insulation class	III	
Voltage connection	15 A max · 48 VDC	
Note	Used to connect two tracks and to guarantee the supply of current.	



GIUNTO ANGOLARE A 90°
90° CORNER JOINT




CODE COMPOSITION

T048 A 000_			finishing	
05	W1	white	RAL 9016	
06	B1	black	RAL 9005	

example of code composition T048 A 00005 W1

TECHNICAL FEATURES

Code	T048 A XX	
Type	Non-polarised 90° corner joint	
Material	Polycarbonate	
Finishing	White RAL 9016	
	Black RAL 9005	
Fixing	Plug-in	
Insulation class	III	
Voltage connection	15 A max · 48 VDC	
Note	Used to connect two tracks joined at 90° and to guarantee that current reaches the corners. Light points cannot be installed in the corners.	



GIUNTO FLESSIBILE
FLEXIBLE JOINT




CODE COMPOSITION

T048 A 000_			finishing	
07	W1	white	RAL 9016	
08	B1	black	RAL 9005	

example of code composition T048 A 00007 W1

TECHNICAL FEATURES

Code	T048 A XX	
Type	Flexible joint	
Material	Polycarbonate	
Finishing	White RAL 9016	
	Black RAL 9005	
Fixing	Plug-in	
Insulation class	III	
Voltage connection	15 A max · 48 VDC	
Note	Used to connect two tracks installed on different surfaces (ceiling-wall) or to create different angles from 90° and to guarantee power supply. Light points cannot be installed in the corners.	



GIUNTO ELETTRICO
PER CONNESSIONE A “T”
ELECTRICAL T-JOINT




CODE COMPOSITION

T048 A 000_			finishing	
85	W2	white	RAL 9010	
84	B1	black	RAL 9005	


example of code composition T048 A 000XX W1

TECHNICAL FEATURES

Code	T048 A XX	
Type	Non-polarised “T” joint	
Material	Polycarbonate + 2 cover in PMMA	
Finishing	White RAL 9016	
	Black RAL 9005	
Fixing	Snap-in fixing	
Insulation class	III	
Voltage connection	15 A max · 48 VDC	
Note	Used to connect three tracks joined with a “T” junction and to guarantee that current reaches the corners. Light points cannot be installed in the corners.	



GIUNTO ELETTRICO
PER CONNESSIONE A “X”
ELECTRICAL X-JOINT




CODE COMPOSITION

T048 A 000_			finishing	
87	W2	white	RAL 9010	
86	B1	black	RAL 9005	

example of code composition T048 A 000XX W1

TECHNICAL FEATURES

Code	T048 A XX	
Type	Non-polarised “X” joint	
Material	Polycarbonate + 3 cover in PMMA	
Finishing	White RAL 9016	
	Black RAL 9005	
Fixing	Snap-in fixing	
Insulation class	III	
Voltage connection	15 A max · 48 VDC	
Note	Used to connect three tracks joined with a “X” junction and to guarantee that current reaches the corners. Light points cannot be installed in the corners.	



KIT SOSPENSIONE
E GIUNZIONE
SUSPENSION
AND JUNCTION KIT




CODE COMPOSITION

T048 A 00024 00

TECHNICAL FEATURES

Code	T048 A 00024 00	
Type	Suspension and junction kit	
Material	Steel	
Finishing	-	
Fixing	-	
Note	Kit composed of metallic spherical rose, steel cable Ø 1.5 mm and automatic screw coupling attached to the bracket. Cable length 3 m (on request different lengths are available). Position the fixture kit with an inter-axis of 450 mm for a max capacity of 50 kg, or 900 mm for max 25 kg.	



TRONCHESE
CUTTER




CODE COMPOSITION

TRK 00000 42

TECHNICAL FEATURES

Code	TRK 00000 42	
Type	Conductor cutting pliers	
Material	-	
Finishing	-	
Fixing	-	
Note	The 1000/2000/3000 mm long tracks are supplied with copper wires already tested with respect to the aluminium in order to prevent the copper terminals from coming into contact with each other, in the case of double power supply, or, to prevent them from touching each other, if closure plugs are used. If it should be necessary to shorten the length of the track during installation, use the special cutting nippers taking care to pull out the four wires by at least 5 mm to guarantee correct electric distances.	



CONNESSIONE MECCANICA
PER ANGOLO 90°
90° MECHANICAL
CONNECTION




CODE COMPOSITION

T048 A 000_	<i>finishing</i>	
	19 W1	white RAL 9016
	20 B1	black RAL 9005


example of code composition T048 A 00019 W1

TECHNICAL FEATURES

Code	T048 A XX
Type	90° corner joint cover
Material	Aluminum body, steel bracket
Finishing	White RAL 9016  Black RAL 9005 
Fixing	By screws
Note	The 90° corner joint allows the mechanical connection of the tracks, forming a 90° angle, without cutting them at 45°.



GIUNTO MECCANICO A “T”
MECHANICAL T-JOINT




CODE COMPOSITION

T048 A 000_	<i>finishing</i>	
	82 W1	white RAL 9016
	80 B1	black RAL 9005


example of code composition T048 A 00080 B1

TECHNICAL FEATURES

Code	T048 A XX
Type	Surface/suspended joint
Material	Polyamide body and steel bracket
Finishing	White RAL 9016  Black RAL 9005 
Fixing	By screws (not included)
Note	The “T” joint allows the mechanical connection of three B55 tracks forming a “T” cross. It's necessary to be associated to T048 A 00084 B1 or T048 A 00085 W2 code to allow electrical and signal continuity.



GIUNTO MECCANICO A “X”
MECHANICAL X-JOINT




CODE COMPOSITION

T048 A 000_	<i>finishing</i>	
	83 W1	white RAL 9016
	81 B1	black RAL 9005

example of code composition T048 A 00081 B1

TECHNICAL FEATURES

Code	T048 A XX
Type	Surface/suspended joint
Material	Polyamide body and steel bracket
Finishing	White RAL 9016  Black RAL 9005 
Fixing	By screws (not included)
Note	The “X” joint allows the mechanical connection of three B55 tracks forming a “X” cross. It's necessary to be associated to T048 A 00086 B1 or T048 A 00087 W2 code to allow electrical and signal continuity.



TAPPO DI CHIUSURA
CLOSURE PLUG




CODE COMPOSITION

T048 A 000_	<i>finishing</i>	
	11 W1	white RAL 9016
	12 B1	black RAL 9005

example of code composition T048 A 00011 W1

TECHNICAL FEATURES

Code	T048 A XX
Type	Closure plug
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	By screws (included)
Note	-



TAPPO DI CHIUSURA
FORATO
HOLED CLOSURE PLUG




CODE COMPOSITION

T048 A 000_	<i>finishing</i>	
	15 W1	white RAL 9016
	16 B1	black RAL 9005

example of code composition T048 A 00015 W1

TECHNICAL FEATURES

Code	T048 A XX
Type	Closure plug with hole for cable passage
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	By screws (included)
Note	-



COVER DI CHIUSURA
CLOSING COVER




CODE COMPOSITION

T048 A 000_	<i>length and finishing</i>	
	74 W1	3000 mm white RAL 9016
	56 B1	1000 mm black RAL 9005
	57 B1	2000 mm black RAL 9005
	18 B1	3000 mm black RAL 9005

example of code composition T048 A 00018 B1

TECHNICAL FEATURES

Code	T048 A XX
Type	Aesthetic closing cover
Material	PMMA
Finishing	White RAL 9016  Black RAL 9005 
Fixing	-
Note	Cover installable at the bottom between the various spotlights, to hide the inside of the track and to allow aesthetic continuity.



CASSETTA
PER ALIMENTATORE
SUPPLY BOX




CODE COMPOSITION

T048 A 000_	<i>finishing</i>	
	58 W1	white RAL 9016
	59 B1	black RAL 9005

example of code composition T048 A 00058 W1

TECHNICAL FEATURES

Code	T048 A XX
Type	48V supply box
Material	Steel
Finishing	White RAL 9016  Black RAL 9005 
Fixing	By screws
Insulation class	-
Voltage connection	-
Note	The purpose of the supply box attached to the surface is to house the driver in all those situations in which a remote driver cannot be used.



ALIMENTATORE
POWER SUPPLY




CODE COMPOSITION

T048 A 000_00	<i>max wattage</i>	
	96	75W
	97	150W
	60	240W

example of code composition T048 A 00096 00

TECHNICAL FEATURES

Code	T048 A XX
Type	Constant voltage driver
Material	-
Finishing	-
Fixing	-
Insulation class	-
Voltage connection	220-240V 50/60Hz - 48 VDC
Max wattage	75W 150W 240W
Note	-



RIPETITORE
OPTOISOLATO DALI
OPTO-INSULATED
REPEATER DALI




CODE COMPOSITION

T048 A 00078 00

TECHNICAL FEATURES

Code	T048 A 00078 00
Type	DALI signal repeater and regenerator
Material	-
Finishing	-
Fixing	-
Insulation class	-
Voltage connection	48 VDC
Max wattage	-
Note	The device makes the DALI FELV signal compatible with the Buzzi & Buzzi 48V track system, making it SELV.



DALI GATE 48V
DALI GATE 48V



CODE COMPOSITION

T048 A 000_

finishing


77 W1 white
RAL 9016

73 B1 black
RAL 9005


example of code composition T048 A 00077 W1

TECHNICAL FEATURES

Code	T048 A XX
Type	Dali Gate Bluetooth®
Material	-
Finishing	White Black
Fixing	-
Insulation class	-
Voltage connection	220-240V · 50/60Hz · 48 VDC
Max wattage	6W
Note	DALI GATE Casambi has been designed and developed to control lamps with DALI drivers using the Casambi app, installed on mobile devices. The Casambi app communicates with DALI GATE by means of Bluetooth® technology. The received signal is then adequately interpreted to generate the corresponding command on the DALI bus. Up to 64 lamps (control gear) can be programmed, assigning them to up to 8 groups. It must be the only DALI master on the bus (MONO MASTER bus).



EXAMPLE OF INSTALLATION

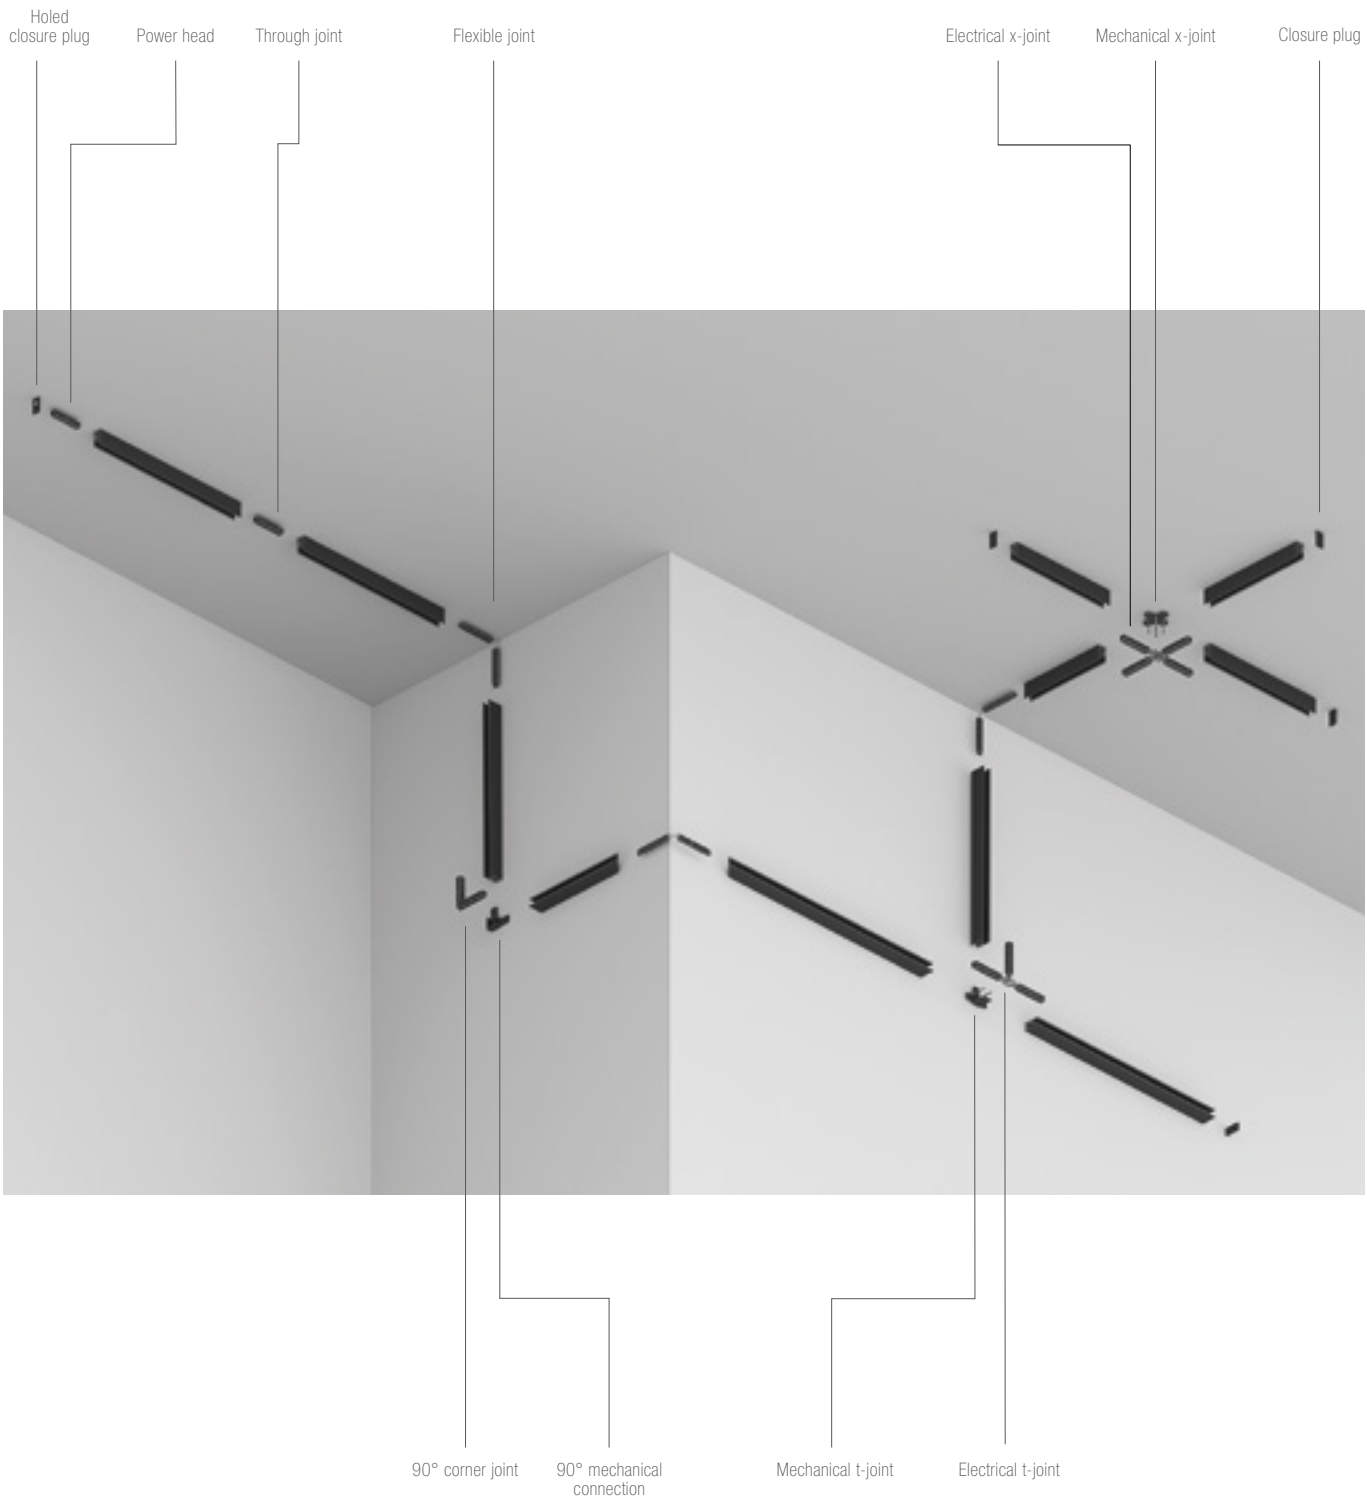



104	U1 NANO 48V
106	X1 NANO 48V
108	Y1 NANO 48V
110	Z1 NANO 48V
112	L1 NANO 48V
114	THE TUBE NANO 48V

48V Nano tracks

LIGHT MODULES



U1 NANO 48V



Apparecchio illuminante da interni per binario 48V N-INSIDE e N10 è disponibile con finitura bianca, nera, champagne o rose gold e lenti intercambiabili.


U1 NANO 48V è un proiettore compatto e versatile che grazie alla sua luce precisa rende ogni singolo dettaglio il protagonista all'interno dello spazio progettuale.

La sorgente luminosa a LED (COB) CRI >90, 3000K, 2700K (4000K su richiesta) è alimentata in corrente continua con convertitore a scomparsa collocato all'interno dell'adattatore del binario.

Indoor luminaire for 48V track N-INSIDE and N10 is available with white, black, champagne or rose gold finish and interchangeable lenses.

U1 NANO 48V is a compact and versatile projector that makes every individual detail the protagonist of the interior of the design space.

The light source is a LED (COB) CRI >90, 3000K, 2700K (4000K light source on request) fed in direct current with incorporated convertor located inside the track adaptor.

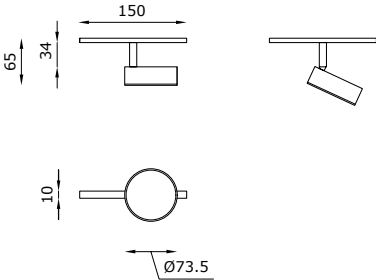

CODE COMPOSITION

T048 L 00024			0
			<i>dimmability</i>
	ND	non dimmable	
	DA	DALI	
	11	1-10V	
			<i>light colour</i>
	27	2700K	
	30	3000K	
	40	4000K	
			<i>lens</i>
	12	12°	
	31	31°	
	54	54°	
			<i>finishing</i>
	W1	white	
	B1	black	
	A1	champagne	
	A2	rose gold	

example of code composition T048 L 00024 **W1 12 27 ND** 0

TECHNICAL FEATURES

Code	T048 L 00024 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	0.4 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 6W
Luminous efficacy	750 lm - 3000K
Light distribution	Beam 12° Beam 31° Beam 54°
Light colour	White 3000K White 2700K White 4000K (on request)
Voltage connection	48 VDC
CRI	>90
Note	Black tige for U1 NANO 48V champagne and rose gold.

X1 NANO 48V




X1 NANO 48V è un apparecchio illuminante da interni per binario 48V N-INSIDE e N10, disponibile con finitura bianca, nera, champagne o rose gold e lenti intercambiabili. Caratterizzato da un proiettore dalle alte prestazioni, dal design minimale per avere il minimo impatto visivo, dotato di braccio direzionabile e inclinabile sull'asse verticale di 360° e orizzontale di 90°.

Una luce che valorizza spazi e ambienti con eleganza, rendendo ogni singolo dettaglio il protagonista all'interno dello spazio progettuale.

Il proiettore X1 NANO 48V ha sorgente luminosa a LED (COB) CRI >90, 3000K o 2700K (4000K su richiesta) alimentata in corrente continua con convertitore a scomparsa collocato all'interno dell'adattatore del binario.

X1 NANO 48V is a 48V N-INSIDE and N10 track luminaire, available in black, white, champagne or rose gold finishes and interchangeable lenses. Characterised by a high performance projector, with a minimal design to give minimum visual impact, it is fitted with an adjustable arm which can be tilted over a vertical axis of 360° and a horizontal axis of 90°.

A light which enhances spaces and environments with elegance, making every individual detail the protagonist of the interior of the design space. The X1 NANO 48V projector has a LED (COB) CRI >90, 3000K or 2700K light source (4000K on request) fed by direct current with recessed converter installed inside the track's adaptor.



CODE COMPOSITION



T048 L 00017		---		0	
				<i>dimmability</i>	
		ND		non dimmable	
		DA		DALI	
		11		1-10V	
				<i>light colour</i>	
		27		2700K	
		30		3000K	
		40		4000K	
				<i>lens</i>	
		22		22°	
		50		50°	
				<i>finishing</i>	
		W1		white	
		B1		black	
		A1		champagne	
		A2		rose gold	

example of code composition T048 L 00017 **W1 22 27 ND 0**

TECHNICAL FEATURES

Code	T048 L 00017 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	0.4 Kg
Mounting	Nano track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Light colour	White 3000K White 2700K White 4000K (on request)
Voltage connection	48 VDC
CRI	>90
Note	Black tige for X1 NANO 48V champagne and rose gold.

Y1 NANO 48V

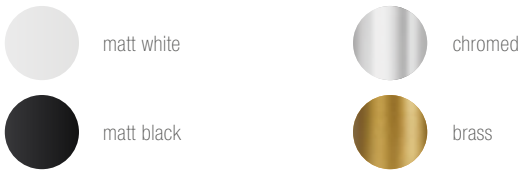

CODE COMPOSITION

T048 L 00021			0
			<i>dimmiability</i>
	ND	non dimmable	
	DA	DALI	
	11	1-10V	
			<i>light colour</i>
	27	2700K	
	30	3000K	
	40	4000K	
			<i>lens</i>
	22	22°	
	50	50°	
			<i>finishing</i>
	W1	white	
	B1	black	
	CP	chromed	
	BR	brass	

example of code composition T048 L 00021 W1 22 27 ND 0

TECHNICAL FEATURES

Code	T048 L 00021 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Chromed Brass
Weight	0.4 Kg
Mounting	Nano track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 8W
Luminous efficacy	800 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Light colour	White 3000K White 2700K White 4000K (on request)
Voltage connection	48 VDC
CRI	>90
Note	Black tige for Y1 NANO 48V chromed and brass.

Y1 NANO 48V è un proiettore cilindrico per ambienti interni per binari a 48V, con dimensioni molto ridotte per un minimo impatto visivo della sorgente. Con finitura bianca, nera, cromo, ottone e lenti intercambiabili, Y1 NANO 48V è dotato di un sistema di braccio orientabile sull'asse verticale di 360° e orizzontale di 90°, dagli snodi a scomparsa. Ha un output luminoso in grado di valorizzare gli ambienti, grazie alla sorgente retrocessa che garantisce la riduzione dell'abbagliamento, per il massimo comfort visivo. Il proiettore Y1 NANO 48V ha sorgente luminosa a LED (COB) CRI >90, 3000K o 2700K (4000K su richiesta) alimentata in corrente continua con convertitore a scomparsa collocato all'interno dell'adattatore del binario.


Y1 NANO 48V is a 48V track cylindrical projector for interior spaces with very small dimensions for a minimum visual impact of the source. In a black, white, chromed, brass finish and interchangeable lenses, Y1 NANO 48V is fitted with a 360° adjustable arm on the 360° vertical axis and 90° horizontal axis, with incorporated joints. It has a light output which can enhance spaces thanks to the recessed source which guarantees the reduction of dazzling, for maximum visual comfort. The Y1 NANO 48V projector has an LED (COB) CRI >90, 3000K or 2700K light source (4000K on request) fed in direct current with incorporated convertor located inside the track adaptor.

Z1 NANO 48V



Z1 NANO 48V è un apparecchio per bianari a 48V N-INSIDE e N10, caratterizzato da un proiettore miniaturizzato di soli 23 mm di diametro, completamente direzionabile sugli assi verticale ed orizzontale. Disponibile con finitura di serie bianca o nera, Z1 NANO 48V è un prodotto che garantisce alte prestazioni con il minimo impatto visivo. Il proiettore Z1 NANO 48V ha sorgente luminosa a LED (COB) CRI >90, 3000K o 2700K (4000K su richiesta) alimentata in corrente continua con convertitore a scomparsa collocato all'interno dell'adattatore a binario.

Z1 NANO 48V is a 48V N-INSIDE and N10 track luminaire, characterised by a miniaturised projector with a diameter of only 23 mm., completely adjustable over vertical and horizontal axes. Available with a standard black or white finish, Z1 NANO 48V is a product which guarantees high performances with minimum visual impact. The Z1 NANO 48V projector has a LED (COB) CRI >90, 3000K or 2700K light source (4000K on request) fed by direct current with recessed converter installed inside the track adapter.



CODE COMPOSITION

T048 L 00018		0
		<i>dimmiability</i>
ND		non dimmable
DA		DALI
		<i>light colour</i>
27		2700K
30		3000K
40		4000K
		<i>lens</i>
22		22°
50		50°
		<i>finishing</i>
W1		white
B1		black

example of code composition T048 L 00018 W1 22 27 ND 0

TECHNICAL FEATURES

Code	T048 L 00018 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black
Weight	0.4 Kg
Mounting	Nano track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Light colour	White 3000K White 2700K White 4000K (on request)
Voltage connection	48 VDC
CRI	>90
Note	-

L1 NANO 48V



pending




matt black

TOTALMENTE A SCOMPARSA NEI BINARI N-INSIDE E N10

Modulo LED lineare da interni che esprime a pieno il concetto di miniaturizzazione. L1 NANO è caratterizzato da un'anima in alluminio con una sezione di soli 10 mm, disponibile con finitura nera in due differenti lunghezze (674 mm e 1174 mm). Versatilità ed estrema efficacia si concretizzano in un apparecchio ad alte prestazioni; la sua luce uniforme, diffusa tramite schermo opale, è ultra performante e ad alta efficienza. L1 NANO è installabile su binario 48V da incasso per la serie N-INSIDE e da superficie e sospensione N10.

TOTALLY RECESSED INTO THE N-INSIDE AND N10 TRACKS

Linear LED module for indoors which fully expresses the concept of miniaturisation. L1 NANO is characterised by an aluminium core with a section of only 10mm, available in a black finish in two different lengths (674 mm and 1174 mm). Versatility and extreme effectiveness come together in a high-performance device; its uniform light, diffused through an opal shade, is ultra-performing and highly efficient. L1 NANO can be installed on a recessed 48V track for the N-INSIDE series and can be surface and suspension mounted for the N10 series.

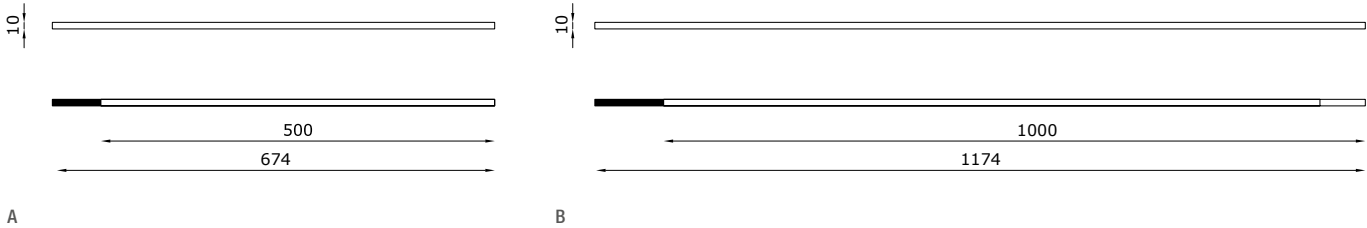

CODE COMPOSITION

T048 L 00019 B1 00	0	
	dimmability	
	ND	non dimmable
	DA	DALI
T048 L 00020 B1 00	0	
	dimmability	
	ND	non dimmable
	DA	DALI
	light colour	
	27	2700K
	30	3000K
	40	4000K

example of code composition T048 L 00019 B1 00 27 ND 0

TECHNICAL FEATURES

Code	T048 L 00019 XX (fig.A)	T048 L 00020 XX (fig.B)
Type	LED module 	LED module
Material	Aluminum	Aluminum
Finishing	Black	Black
Weight	0.1 Kg	0.15 Kg
Mounting	Nano track 48V	Nano track 48V
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Electronic driver on board (included)	Electronic driver on board (included)
Lamp type	LED 	LED
Lamp wattage	6W	12W
Luminous efficacy	71.5 lm/W - 3000K	71.5 lm/W - 3000K
Light distribution	Opal screen diffused	Opal screen diffused
Fitting	-	-
Light colour	White 3000K White 2700K White 4000K	White 3000K White 2700K White 4000K
Voltage connection	48 VDC	48 VDC
CRI	>90	>90
UGR	<29	<29
Emergency	-	-
Note	Suitable for N-INSIDE and N-10.	Suitable for N-INSIDE and N-10.

THE TUBE NANO 48V




-  matt white
-  matt black
-  chromed
-  champagne
-  rose gold

MASSIMA POTENZA IN 15 mm DI DIAMETRO.

The Tube NANO 48V è una sospensione dal design minimale per binario nano 48V. Il suo diametro di soli 15 mm la rendono estremamente discreta ed elegante nelle forme. Disponibile in diverse finiture bianco, nero, cromo, champagne e rose gold. Dotato di sorgente LED di ultima generazione con un output luminoso in grado di far emergere singoli dettagli all'interno dello spazio.

MAXIMUM POWER IN A DIAMETER OF 15 mm.

The Tube NANO 48V is a pendant fitting with minimal design for 48V nano track. Its diameter of only 15 mm makes it extremely discrete and elegant in shape. Available in various finishes; white, black, chromed, champagne and rose gold. Witted with the latest generation LED source with a light output able to highlight individual details within the space.

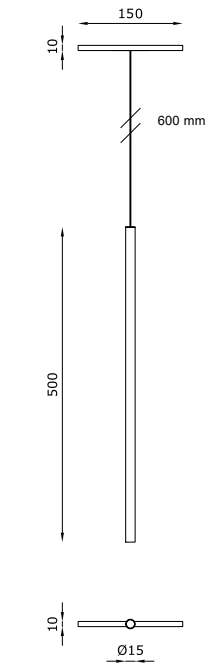

CODE COMPOSITION

T048 L 00022			00	0
			<i>dimmability</i>	
			ND	non dimmable
			DA	DALI
			11	1-10V
			<i>light colour</i>	
			27	2700K
			30	3000K
			<i>finishing</i>	
			W1	white
			B1	black
			CP	chromed
			A1	champagne
			A2	rose gold

example of code composition T048 L 00022 **W1** 00 **27** **ND** 0

TECHNICAL FEATURES

Code	T048 L 00022 XX
Type	Suspension lamp 
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	0.5 Kg
Mounting	Nano track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED 
Lamp wattage	1 x 4.5W
Luminous efficacy	360 lm - 3000K
Light distribution	Narrow beam
Fitting	-
Light colour	White 3000K White 2700K
Voltage connection	48 VDC
CRI	>90
Emergency	-
Note	Black silicon cable (L 600 mm). On request different lenght.

120
126

N-INSIDE
N10



48V Nano tracks

TRACKS


DIMENSIONI EFFETTIVE DI SOLI 10 X 10 MM
REAL DIMENSIONS JUST 10 MM



N-INSIDE

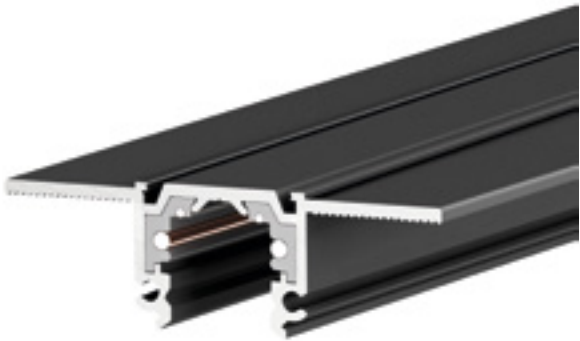

LIGHT MODULES

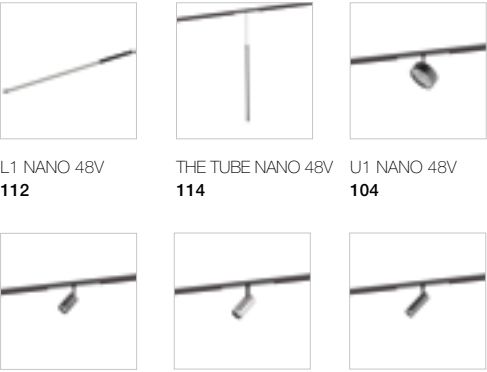

L1 NANO 48V
112

THE TUBE NANO 48V
114

U1 NANO 48V
104

X1 NANO 48V
106

Y1 NANO 48V
108

Z1 NANO 48V
110

Sistema di illuminazione da interno per installazione a incasso. Binario e corpi sono gestibili con sistemi di controllo remoto DALI e 1-10V. Il profilo ha lunghezza compresa fra 1 m e 3 m, estruso in alluminio nero e dotato di conduttori 48V.

N-INSIDE a 48V si completa a sua volta con tutti i prodotti di illuminazione Buzzi & Buzzi dotati di attacchi con un'elettronica integrata. È vietato utilizzare alimentatori, driver, sistemi Bus Dati e componenti non omologati SELV e/o che abbiano una U-OUT > 60Vdc.

Si raccomanda l'utilizzo di un ripetitore optoisolato DALI compatibile per rendere compatibile un comando FELV in SELV (vedi codice: T048 A 00078 00).

A lighting system for interiors for recessed installation. The track and structures can be managed by remote DALI and 1-10V systems. The profile is between 1 m and 3 m long, extruded in black aluminium and fitted with 48V leads.

In turn, the 48V N-INSIDE is completed with all the Buzzi & Buzzi lighting products fitted with connections with integrated electronics. The use of NON SELV or U-OUT > 60Vdc power supplies, drivers and components is strictly forbidden.

Is recommended the usage of an opto-insulated repeater DALI to convert FELV into SELV (code: T048 A 00078 00).

CODE COMPOSITION

T048 T 05 B1 0 _ 1		
	length	
	01	1000 mm
	02	2000 mm
example of code composition	03	3000 mm
	T048 T 05 B1 0 01 1	

TECHNICAL FEATURES

Code	T048 T 05 XX
Type	Low voltage track
Material	Aluminum
Finishing	Black
Weight	-
Mounting	Recessed
IP rating	-
Insulation class	III
Control gear	Remote power supply (not included)
Dimensions	A: 1000 mm 2000 mm 3000 mm
Cut out for plasterboard	21 mm x A
Voltage connection	48 VDC
Circuits	2 x ±10 A · 48 VDC 1 x ±10 A · 48 VDC + D+/D
Note	The supply connectors, plugs and further fixture accessories must be ordered separately. Any 90° connector must be ordered separately to ensure electric continuity in the corners. Light points cannot be installed in the corners.

TESTATA
DI ALIMENTAZIONE
POWER HEAD




CODE COMPOSITION

T048 A 00095 B1

TECHNICAL FEATURES

Code	T048 A 00095 B1
Type	Non-polarised power head
Material	Polyamide body
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	10 A max · 48 VDC
Note	-



GIUNTO PASSANTE
THROUGH JOINT




CODE COMPOSITION

T048 A 00064 B1

TECHNICAL FEATURES

Code	T048 A 00064 B1
Type	Non-polarised through joint
Material	Polyamide body
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	10 A max · 48 VDC
Note	Used to connect two tracks and to guarantee the supply of current.



GIUNTO ANGOLARE
A 90°
90° CORNER JOINT




CODE COMPOSITION

T048 A 00065 B1

TECHNICAL FEATURES

Code	T048 A 00065 B1
Type	Non-polarised 90° corner joint
Material	Polyamide body
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	10 A max · 48 VDC
Note	Used to connect two tracks joined at 90° and to guarantee that current reaches the corners. Light points cannot be installed in the corners.



GIUNTO ANGOLARE A 90°
SOFFITTO-PARETE
CEILING-WALL
90° CORNER JOINT




CODE COMPOSITION

T048 A 00066 B1

TECHNICAL FEATURES

Code	T048 A 00066 B1
Type	Non-polarised 90° ceiling-wall corner joint
Material	Polyamide body
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	10 A max · 48 VDC
Note	Non-polarized angle for ceiling-to-wall connection, used to connect two tracks joined to 90°. Light points cannot be installed in the corners.



GIUNTO FLESSIBILE
FLEXIBLE JOINT




CODE COMPOSITION


T048 A 00067 B1

TECHNICAL FEATURES

Code	T048 A 00067 B1
Type	Flexible joint
Material	Polyamide body
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	10 A max · 48 VDC
Note	Used to connect two tracks installed on different surfaces (ceiling-wall) or to create different angles from 90° and to guarantee power supply. Light points cannot be installed in the corners.



TRONCHESE
CUTTER




CODE COMPOSITION

TRK 00000 42

TECHNICAL FEATURES

Code	TRK 00000 42
Type	Conductor cutting pliers
Material	-
Finishing	-
Fixing	-
Note	The 1000/2000/3000 mm long tracks are supplied with copper wires already tested with respect to the aluminium in order to prevent the copper terminals from coming into contact with each other, in the case of double power supply, or, to prevent them from touching each other, if closure plugs are used. If it should be necessary to shorten the length of the track during installation, use the special cutting nippers taking care to pull out the four wires by at least 5 mm to guarantee correct electric distances.



TAPPO DI CHIUSURA
CLOSURE PLUG




CODE COMPOSITION

T048 A 00062 B1

TECHNICAL FEATURES

Code	T048 A 00062 B1
Type	Closure plug
Material	Polyamide body
Finishing	Black RAL 9005 
Fixing	By screws (included)
Note	-



COVER DI CHIUSURA
CLOSING COVER



CODE COMPOSITION

T048 A 00089 B1

TECHNICAL FEATURES

Code	T048 A 00089 B1
Type	Aesthetic closing cover
Material	PMMA
Finishing	Black RAL 9005 
Fixing	-
Note	Cover installable at the bottom between the various spotlights, to hide the inside of the track and to allow aesthetic continuity. Cover length: 3000 mm



ALIMENTATORE
POWER SUPPLY




CODE COMPOSITION

T048 A 000_00		
	max wattage	
96	75W	
97	150W	
60	240W	
example of code composition	T048 A 000 96 00	

TECHNICAL FEATURES

Code	T048 A XX
Type	Constant voltage driver
Material	-
Finishing	-
Fixing	-
Insulation class	-
Voltage connection	220-240V 50/60Hz - 48 VDC
Max wattage	75W 150W 240W
Note	-

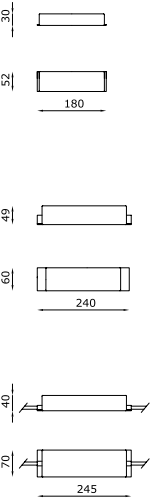

RIPETITORE
OPTOISOLATO DALI
OPTO-INSULATED
REPEATER DALI



CODE COMPOSITION



T048 A 00078 00		
-----------------	--	--

TECHNICAL FEATURES

Code	T048 A 00078 00
Type	DALI signal repeater and regenerator
Material	-
Finishing	-
Fixing	-
Insulation class	-
Voltage connection	48 VDC
Max wattage	-
Note	The device makes the DALI FELV signal compatible with the Buzzi & Buzzi 48V track system, making it SELV.



N10

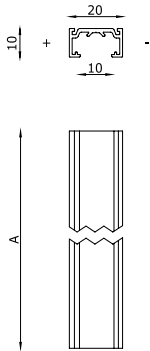

LIGHT MODULES



L1 NANO 48V
112



THE TUBE NANO 48V
114



U1 NANO 48V
104



X1 NANO 48V
106



Y1 NANO 48V
108



Z1 NANO 48V
110

Sistema di illuminazione da interno, per installazione a sospensione e a superficie. Binario e corpi sono gestibili con sistemi di controllo remoto DALI e 1-10V. Il profilo ha lunghezza compresa fra 1 m e 3 m, estruso in alluminio e dotato di conduttori 48V. N10 a 48V si completa a sua volta con tutti i prodotti di illuminazione Buzzi & Buzzi dotati di attacchi con un'elettronica integrata. È vietato utilizzare alimentatori, driver, sistemi Bus Dati e componenti non omologati SELV e/o che abbiano una U-OUT > 60Vdc. Si raccomanda l'utilizzo di un ripetitore optoisolato DALI compatibile per rendere compatibile un comando FELV in SELV (vedi codice: T048 A 00078 00).

Lighting system for interiors, for pendant and surface installation. Track and structures can be managed by remote DALI and 1-10V control systems. The profile is between 1m and 3 m long, extruded in aluminium. It is fitted with 48V leads. In turn, the 48V N10 is completed with all the Buzzi & Buzzi lighting products fitted with connections with integrated electronics. The use of NON SELV or U-OUT > 60Vdc power supplies, drivers and components is strictly forbidden. Is recommended the usage of an opto-insulated repeater DALI to convert FELV into SELV (code: T048 A 00078 00).

CODE COMPOSITION

T048 T 04 B1 1 _ 1	length	
	01	1000 mm
	02	2000 mm
	03	3000 mm
example of code composition	T048 T 04 B1 1 01 1	

TECHNICAL FEATURES

Code	T048 T 04 XX
Type	Low voltage track
Material	Aluminum
Finishing	Black RAL 9005
Weight	-
Mounting	Surface I Suspension
IP rating	-
Insulation class	III
Control gear	Remote power supply (not included)
Dimensions	A: 1000 mm I 2000 mm I 3000 mm
Cut out for plasterboard	-
Voltage connection	48 VDC
Circuits	2 x ±10 A · 48 VDC 1 x ±10 A · 48 VDC + D+/D
Note	The supply connectors, plugs and further fixture accessories must be ordered separately.
	Any 90° connector must be ordered separately to ensure electric continuity in the corners.
	Light points cannot be installed in the corners.

TESTATA
DI ALIMENTAZIONE
POWER HEAD




CODE COMPOSITION

T048 A 00061 B1

TECHNICAL FEATURES

Code	T048 A 00061 B1
Type	Non-polarised power head
Material	Polyamide body
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	10 A max · 48 VDC
Note	-



GIUNTO PASSANTE
THROUGH JOINT




CODE COMPOSITION

T048 A 00064 B1

TECHNICAL FEATURES

Code	T048 A 00064 B1
Type	Non-polarised through joint
Material	Polyamide body
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	10 A max · 48 VDC
Note	Used to connect two tracks and to guarantee the supply of current.



GIUNTO ANGOLARE
A 90°
90° CORNER JOINT




CODE COMPOSITION

T048 A 00065 B1

TECHNICAL FEATURES

Code	T048 A 00065 B1
Type	Non-polarised 90° corner joint
Material	Polyamide body
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	10 A max · 48 VDC
Note	Used to connect two tracks joined at 90° and to guarantee that current reaches the corners. Light points cannot be installed in the corners.



GIUNTO ANGOLARE A 90°
SOFFITTO-PARETE
E PARETE-PARETE
CEILING-WALL AND WALL-WALL
90° CORNER JOINT




CODE COMPOSITION

T048 A 00066 B1

TECHNICAL FEATURES

Code	T048 A 00066 B1
Type	Non-polarised 90° ceiling-wall corner joint
Material	Polyamide body
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	10 A max · 48 VDC
Note	Non-polarized angle for ceiling-to-wall connection, used to connect two tracks joined to 90°. Light points cannot be installed in the corners.



GIUNTO FLESSIBILE
FLEXIBLE JOINT




CODE COMPOSITION

T048 A 00067 B1

TECHNICAL FEATURES

Code	T048 A 00067 B1
Type	Flexible joint
Material	Polyamide body
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	10 A max · 48 VDC
Note	Used to connect two tracks installed on different surfaces (ceiling-wall) or to create different angles from 90° and to guarantee power supply. Light points cannot be installed in the corners.



TRONCHESE
CUTTER




CODE COMPOSITION

TRK 00000 42

TECHNICAL FEATURES

Code	TRK 00000 42
Type	Conductor cutting pliers
Material	-
Finishing	-
Fixing	-
Note	The 1000/2000/3000 mm long tracks are supplied with copper wires already tested with respect to the aluminium in order to prevent the copper terminals from coming into contact with each other, in the case of double power supply, or, to prevent them from touching each other, if closure plugs are used. If it should be necessary to shorten the length of the track during installation, use the special cutting nippers taking care to pull out the four wires by at least 5 mm to guarantee correct electric distances.



TAPPO DI CHIUSURA
CLOSURE PLUG




CODE COMPOSITION

T048 A 00062 B1

TECHNICAL FEATURES

Code	T048 A 00062 B1
Type	Closure plug
Material	Polyamide body
Finishing	Black RAL 9005 
Fixing	By screws (included)
Note	-



GIUNTO ANGOLARE
ORIZZONTALE
HORIZONTAL
CORNER JOINT




CODE COMPOSITION

T048 A 00068 B1

TECHNICAL FEATURES

Code	T048 A 00068 B1
Type	90° horizontal corner joint cover
Material	Aluminum body, steel bracket
Finishing	Black RAL 9005 
Fixing	By screws
Note	The 90° horizontal corner joint allows the mechanical connection of the tracks, forming a 90° angle, without cutting them at 45°.




VERTICAL CORNER JOINT




TECHNICAL FEATURES



TECHNICAL FEATURES




TECHNICAL FEATURES



CODE COMPOSITION

TECHNICAL FEATURES



TECHNICAL FEATURES




Technical drawing of a door. The top part shows a side view with a width of 12 and a height of 3. The main part shows a front view with a height of 3000. A zigzag break line is used to indicate that the door is taller than shown.

CODE COMPOSITION

TECHNICAL FEATURES



TECHNICAL FEATURES



CODE COMPOSITION

TECHNICAL FEATURES

Technical drawing of the 1000 Series LED strip showing top and side views with dimensions:

- Top View:** A long, thin rectangular strip with a total length of 435 mm. It features a series of small, evenly spaced rectangular segments along its length.
- Side View:** A cross-section of the strip showing a height of 32.5 mm. The profile is rectangular with a slightly recessed top edge.

RIPETITORE
OPTOISOLATO DALI
OPTO-INSULATED
REPEATER DALI




CODE COMPOSITION


T048 A 00078 00

TECHNICAL FEATURES

Code	T048 A 00078 00
Type	DALI signal repeater and regenerator
Material	-
Finishing	-
Fixing	-
Insulation class	-
Voltage connection	48 VDC
Max wattage	-
Note	The device makes the DALI FELV signal compatible with the Buzzi & Buzzi 48V track system, making it SELV.



EXAMPLE OF INSTALLATION

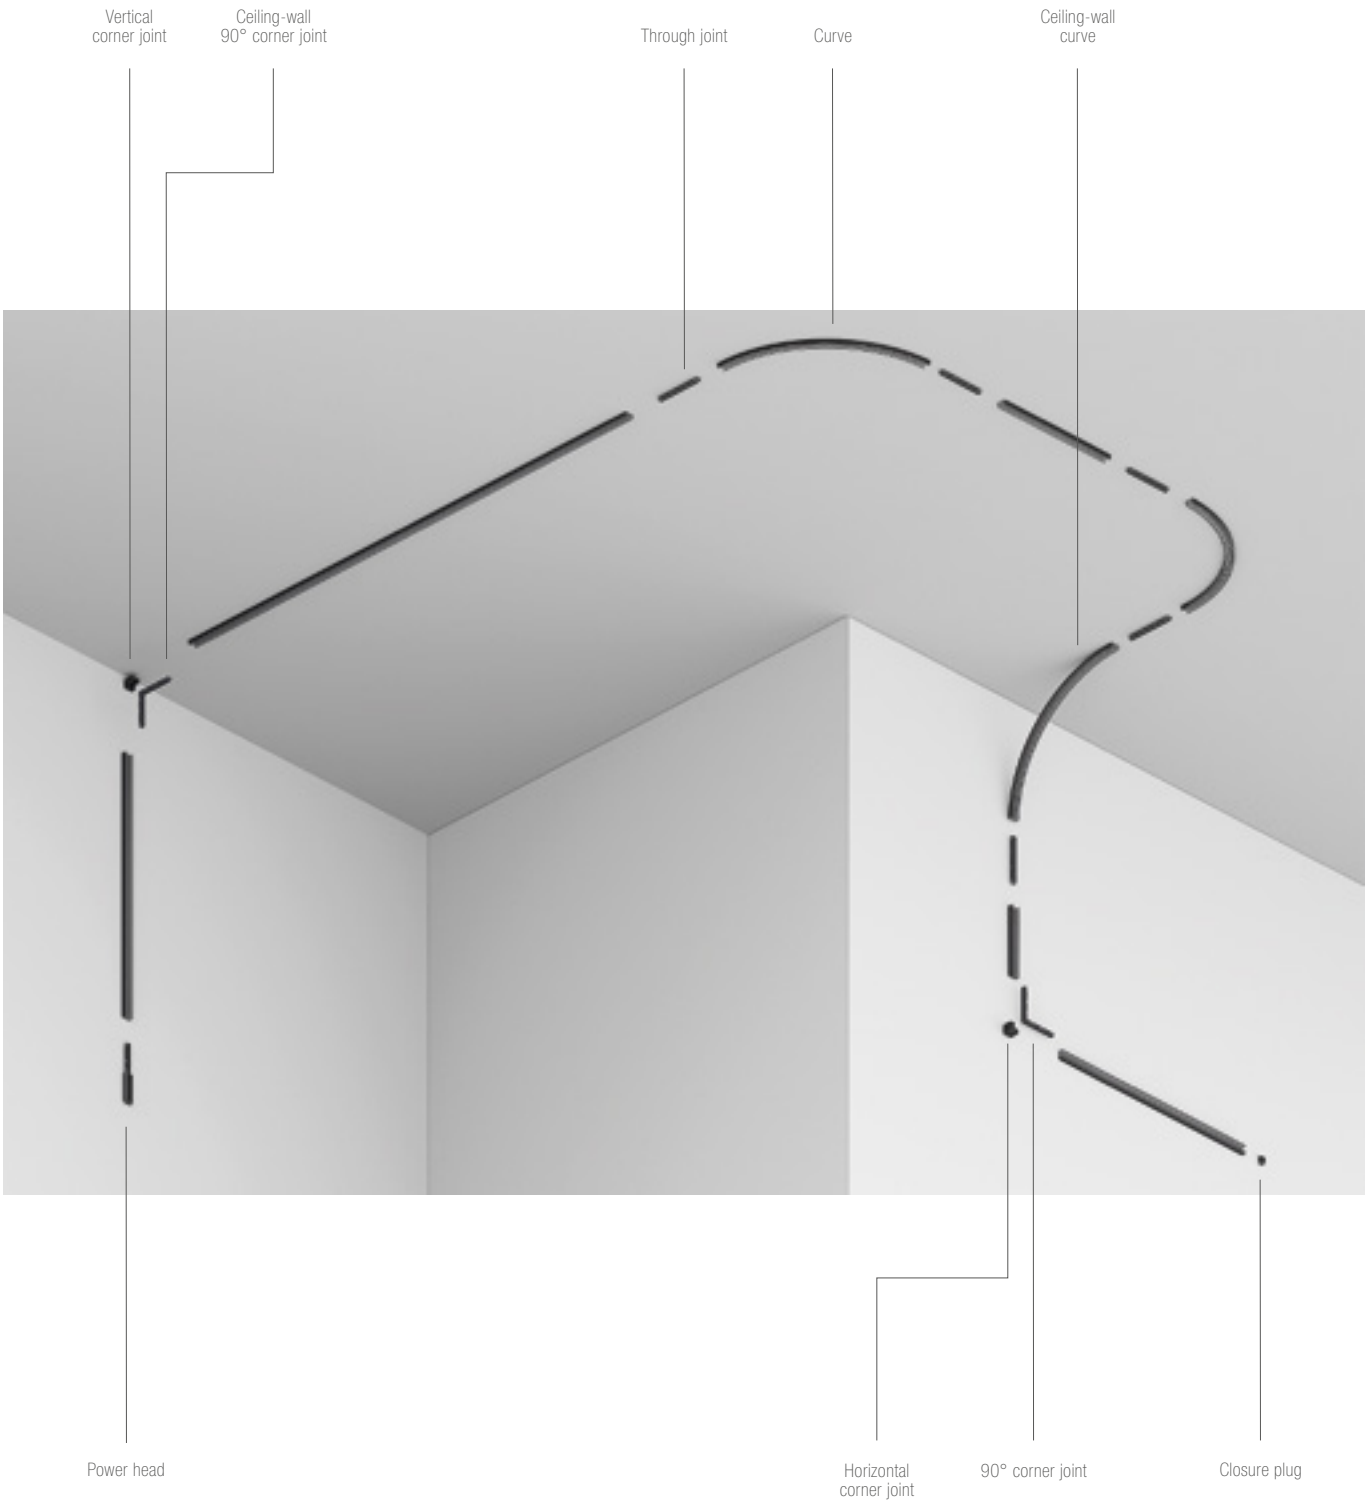




140	X1 220V
142	Y1 220V
146	Z1 220V
150	M1 220V
154	Q1 220V
158	Q2 220V
162	Q3 220V
166	Q4 220V
168	Inciso Q4 220V
172	ML 220V
174	GL 220V

220V


LIGHT MODULES

X1 220V

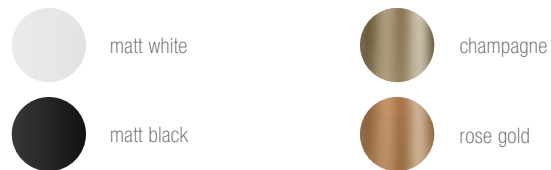

X1 220V è un apparecchio illuminante da interni, disponibile con finitura bianca, nera, champagne o rose gold e lenti intercambiabili, adatto per installazione su binario 220V. Caratterizzato da un proiettore dalle alte prestazioni, dal design minimale per avere il minimo impatto visivo, dotato di braccio direzionabile e inclinabile sull'asse verticale di 360° e orizzontale di 90°: una luce puntuale che sa valorizzare spazi e ambienti con discrezione, linearità ed eleganza, rendendo ogni singolo dettaglio il protagonista all'interno dello spazio progettuale. Un prodotto che fa della resistenza e della precisione le sue carte vincenti.

X1 220V is an indoor luminaire installable on 220V rail. It is available with white, black, champagne or rose gold finishings and interchangeable lens. Characterized by a high-performance projector realized with an essential design to obtain a minimal visual impact, it is provided by an adjustable arm which can be inclined up to 360° vertically and 90° horizontally: a punctual light able to valorize space and environment in a subtle, uniform and elegant way, making every single detail the absolute protagonist of the architectonic project. A product which is by far the best choice in fact of resistance and precision.



CODE COMPOSITION


T220 L 00001	0	
	<i>dimmability</i>	
	ND	non dimmable
	DA	DALI
	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K
	<i>lens</i>	
	22	22°
	50	50°
	<i>finishing</i>	
	W1	white
	B1	black
	A1	champagne
	A2	rose gold

example of code composition T220 L 00001 **W1** 22 27 ND 0

TECHNICAL FEATURES


Code	T220 L 00001 XX
Type	Projector $\pm 360^{\circ}$ / $\pm 90^{\circ}$ 
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	0.4 Kg
Mounting	Track 220V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED 
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Note	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track. Black tige for X1 220V champagne and rose gold.

Y1 220V

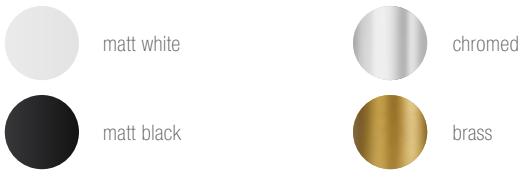

Y1 220V è un proiettore cilindrico per ambienti interni, adatto per installazioni su binario 220V, con dimensioni molto ridotte per un minimo impatto visivo della sorgente. Ha finitura di serie bianca, nera opaca, cromo o brass e lenti intercambiabili. Y1 220V è dotato di un sistema di braccio orientabile a 360°, dagli snodi invisibili. Ha un output luminoso in grado di valorizzare gli ambienti con precisione ed eleganza e, grazie alla sorgente retrocessa, garantisce la riduzione dell'abbagliamento, per il massimo comfort visivo.

Y1 220V is a cylindrical projector for indoor environments, suitable for 220V rail installations, with small dimensions for minimum visual impact of the light source. It is produced with a white, opaque black chromed or brass finishings with interchangeable lens. Y1 220V is fitted with a 360 degrees-adjustable arm system, with invisible joints. Its light output can valorise environments with precision and elegance and, thanks to the recessed light source it reduces the glaring effect, for maximum visual comfort.



CODE COMPOSITION

T220 L 00002		0
		dimmability
ND	non dimmable	
DA	DALI	
		light colour
27	2700K	
30	3000K	
40	4000K	
		lens
22	22°	
50	50°	
		finishing
W1	white	
B1	black	
CP	chromed	
BR	brass	

example of code composition T220 L 00002 W1 22 27 ND 0

TECHNICAL FEATURES

Code	T220 L 00002 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Chromed Brass
Weight	0.4 Kg
Mounting	Track 220V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 8W
Luminous efficacy	800 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Note	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track. Black tige for Y1 220V chromed and brass.




Y1 220V
SUPERFUTUREDESIGN*

Z1 220V



Z1 220V è un apparecchio per ambienti interni, adatto per installazioni su binario 220V e caratterizzato da un proiettore miniaturizzato di soli 23 mm di diametro, completamente direzionabile sugli assi verticale ed orizzontale. Finiture disponibili bianca o nera per Z1 220V, un prodotto che garantisce alte prestazioni con il minimo impatto visivo grazie ai suoi snodi invisibili.

Z1 220V is a light fitting for interiors suitable for installations on 220V track and characterised by a miniaturised projector with a diameter of only 23 mm, completely directional on its vertical and horizontal axes. Finishes available in white or black for Z1 220V, a product which guarantees high performances with minimum visual impact thanks to its invisible joints.




CODE COMPOSITION

T220 L 00003	0	
	<i>dimmability</i>	
	ND	non dimmable
	DA	DALI
	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K
	<i>lens</i>	
	22	22°
	50	50°
	<i>finishing</i>	
	W1	white
	B1	black

example of code composition T220 L 00003 W1 22 27 ND 0

TECHNICAL FEATURES

Code	T220 L 00003 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black
Weight	0.4 Kg
Mounting	Track 220V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Note	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track.

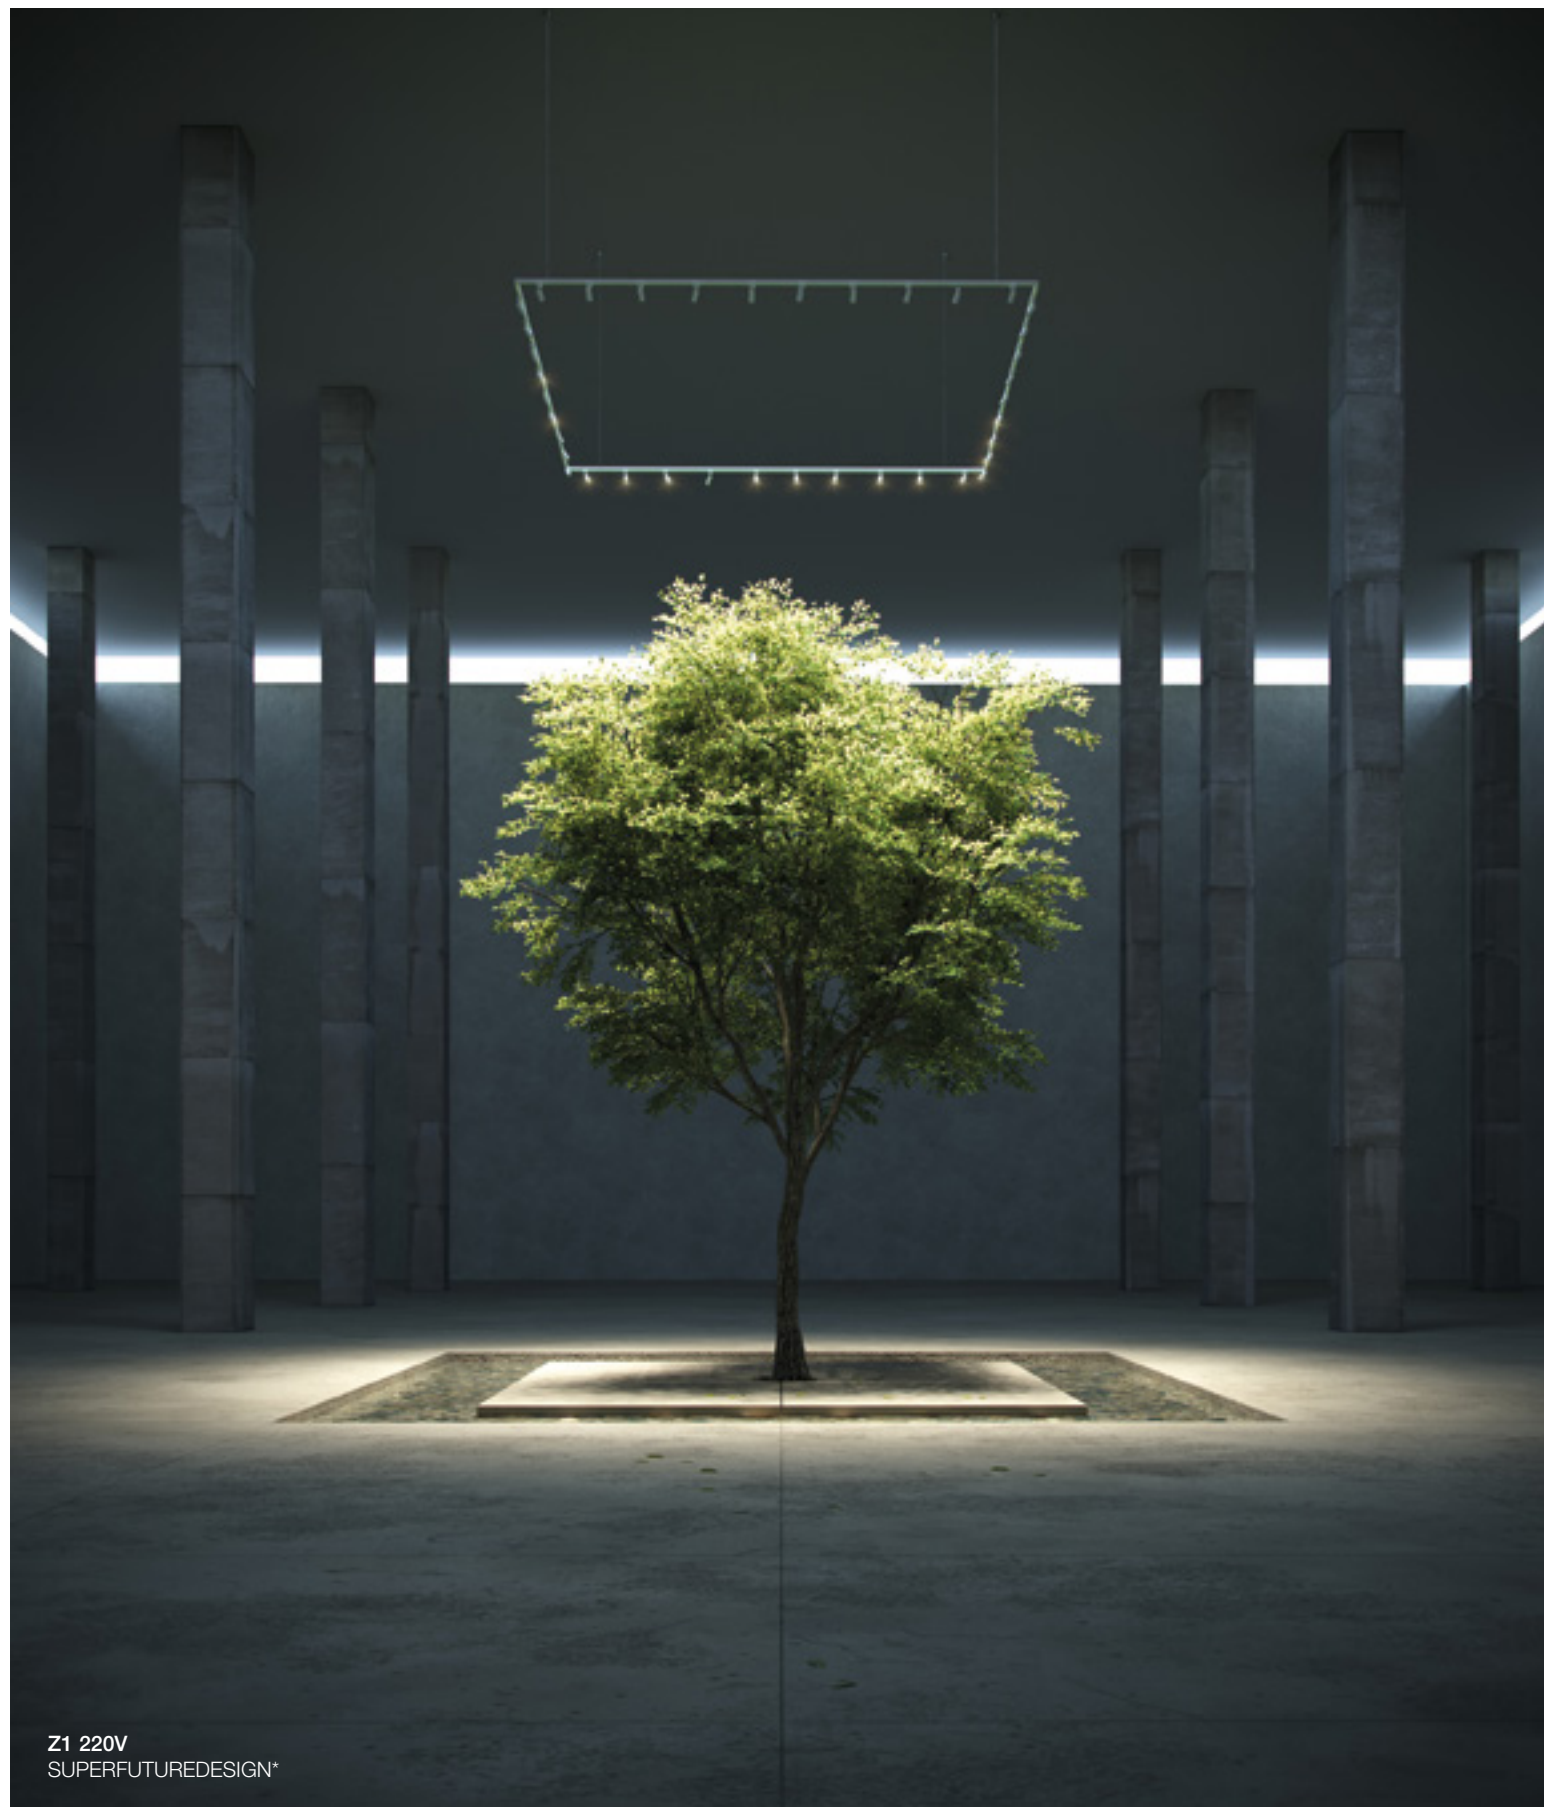


Z1 220V
SUPERFUTUREDESIGN*

M1 220V



M1 220V è una sospensione per interni, installabile su binario 220V: è composta da un’asta che conduce la luce in modo diretto e puntuale, e un proiettore completamente direzionabile a 360°, che permette di dirigere la luce verso singoli dettagli dello spazio. Una sospensione dal design minimale con luce spot, disponibile con ottiche differenti.

M1 220V is a suspended indoor luminaire installable on 220V rail: it is composed by a pole which scatters light in a direct and punctual manner. It is also provided by a projector adjustable up to 360°, which allows to redirect the luminescent beam towards the single details within the space. A suspended lamp of minimal design and emanating a spot light, available with different lens.

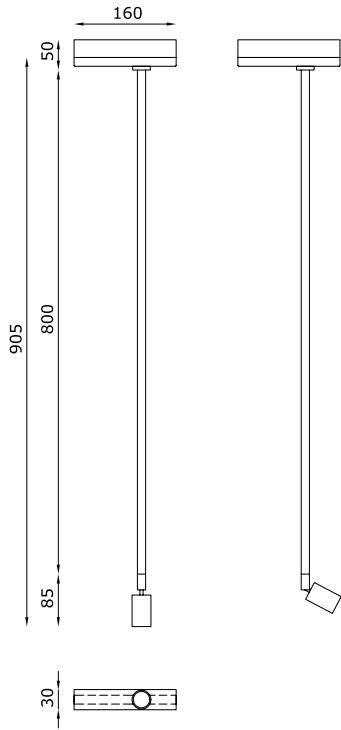

CODE COMPOSITION

T220 L 00004	0	
	dimmability	
	ND	non dimmable
	DA	DALI
	light colour	
	27	2700K
	30	3000K
	40	4000K
	lens	
	22	22°
	50	50°
	finishing	
	W1	white
	B1	black

example of code composition T220 L 00004 W1 22 27 ND 0

TECHNICAL FEATURES

Code	T220 L 00004 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White I Black
Weight	0.75 Kg
Mounting	Track 220V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Light colour	White 3000K White 2700K I 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Note	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track.




Q1 220V



Proiettore ad alte performance in metallo verniciato a polvere: Q1 220V è un apparecchio per interni adatto per installazione su binario 220V. Garantisce il minimo impatto visivo, è completamente orientabile a 360° e disponibile in più varianti ottiche.

A high-performance, metallic dust-painted projector: Q1 220V is an indoor luminaire installable on 220V rail. It guarantees a minimal visual impact and is completely orientable up to 360° and also available with different lens.



CODE COMPOSITION

T220 L 00005		0	
		dimmability	
		ND	non dimmable
		DA	DALI
		light colour	
		27	2700K
		30	3000K
		40	4000K
		lens	
		12	12°
		24	24°
		38	38°
		finishing	
		W1	white
		B1	black

example of code composition T220 L 00005 W1 12 27 ND 0

TECHNICAL FEATURES

Code	T220 L 00005 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black
Weight	0.8 Kg
Mounting	Track 220V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 12W
Luminous efficacy	1550 lm - 3000K
Light distribution	Beam 24° Beam 12° 38° (on request)
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Note	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track.




Q2 220V



Proiettore professionale da binario 220V in alluminio verniciato a polvere: Q2 220V è adatto per installazioni in ambienti interni dotato di sistema con braccio a scomparsa nel corpo e completamente direzionabile. Disponibile in differenti ottiche, intercambiabili senza utilizzo di alcun utensile, combinando al massimo funzionalità e design. Un perfetto design dove l'alimentatore è occultato nel corpo del faretto.

A professional projector in aluminium installable on 220V rail and dust painted: Q2 220V is ideal to be placed in indoor environments. It has a disappearing, adjustable arm which can be hidden within the body. The different and interchangeable lens, which can be easily replaced without any specific items, best combine functionality and design. A perfect design in which the driver remains hidden in the body of the spotlight.




CODE COMPOSITION

T220 L 00006	ND 0	
	light colour	
	27	2700K
	30	3000K
	40	4000K
	lens	
	15	15°
	30	30°
	50	50°
	finishing	
	W1	white
	B1	black

example of code composition T220 L 00006 W1 15 27 ND 0

TECHNICAL FEATURES

Code	T220 L 00006 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White I Black
Weight	0.5 Kg
Mounting	Track 220V
IP rating	IP20
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 15W
Luminous efficacy	1400 lm - 3000K
Light distribution	Beam 30° Beam 15° I 50° (on request)
Light colour	White 3000K White 2700K I 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	-
Note	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track.

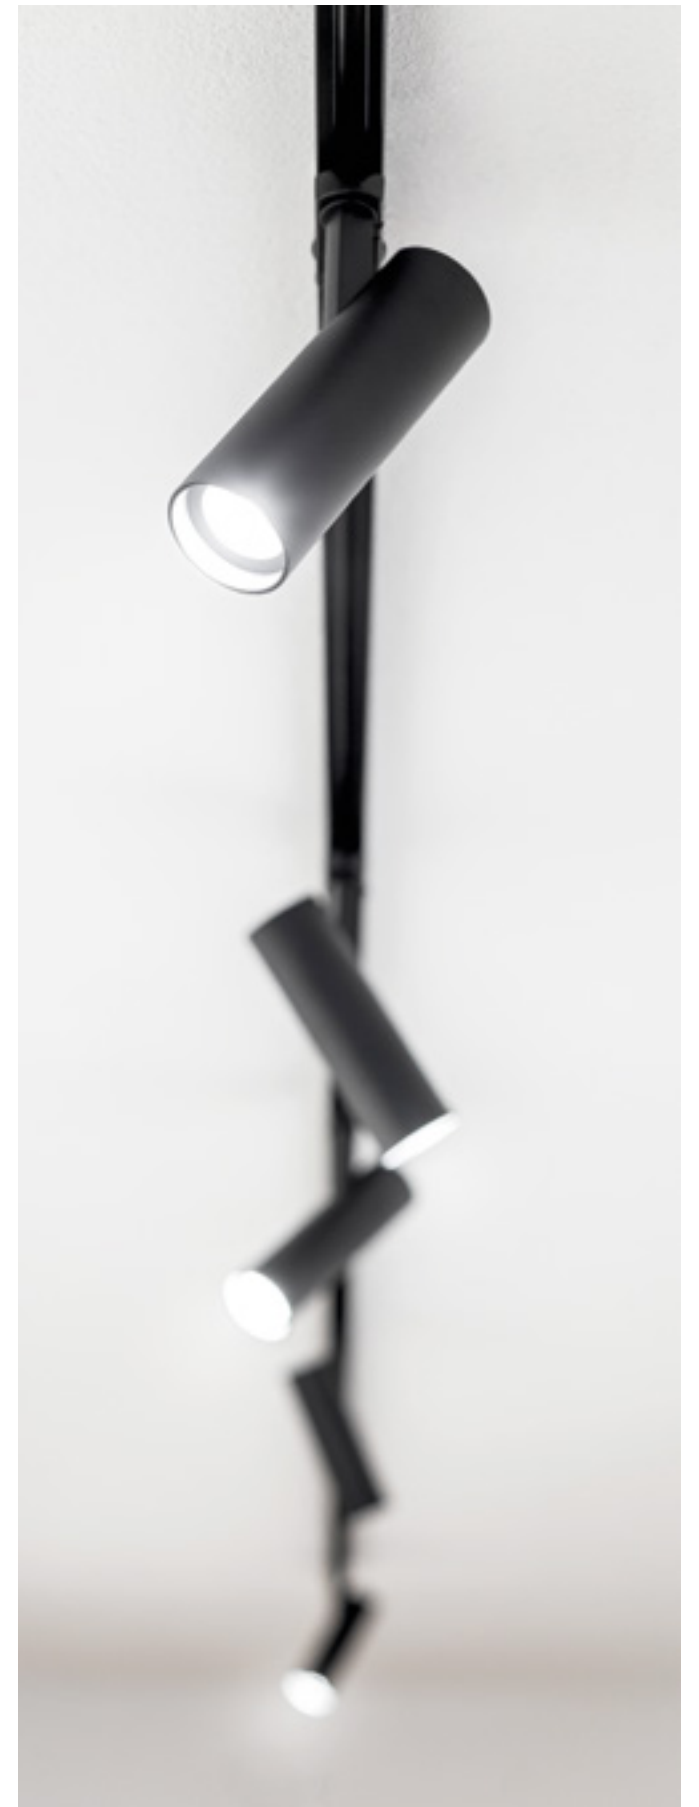


Q3 220V



Massime performance luminose per un proiettore professionale da binario 220V in alluminio verniciato a polvere pensato per avere il minimo impatto visivo. Q3 220V è totalmente direzionabile, ed è disponibile in ottiche differenti per adattarsi a qualsiasi esigenza e tipologia di ambiente. Un perfetto design dove l'alimentatore è occultato nel corpo del faretto.

Excellent luminescent performances for a professional projector in aluminium installable on 220V rail and dust painted. Q3 220V is designed for having the minimal visual impact and is completely adjustable. Available with different lens, it adapts itself to any necessities and to any kinds of environments. A perfect product of design in which the driver remains hidden in the body of the spotlight.



CODE COMPOSITION

T220 L 00007	ND 0	
	light colour	
	27	2700K
	30	3000K
	40	4000K
	lens	
	15	15°
	30	30°
	50	50°
	finishing	
	W1	white
	B1	black

example of code composition T220 L 00007 W1 15 27 ND 0


TECHNICAL FEATURES

Code	T220 L 00007 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black
Weight	0.6 Kg
Mounting	Track 220V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 28W
Luminous efficacy	2600 lm - 3000K
Light distribution	Beam 30° Beam 15° 50° (on request)
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	-
Note	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track.




Q3 220V
Castello Visconteo, Leonardo Da Vinci gallery - Cassano D'Adda, Milan

Q4 220V

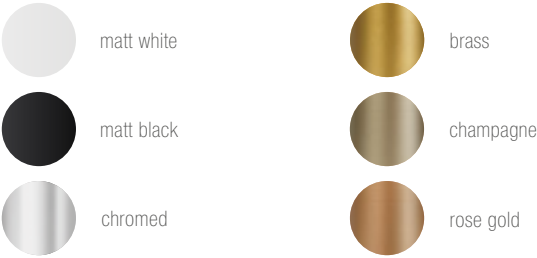

Proiettore per binario 220V con sorgente luminosa a LED (COB) CRI 90, 3000K (2700K su richiesta) alimentata in corrente continua con convertitore a scomparsa collocato all'interno dell'adattatore del prodotto. Q4 220V è un apparecchio per interni che garantisce il minimo impatto visivo, completamente orientabile a 360°, è disponibile in più varianti ottiche. Proiettore ad alte performance in alluminio verniciato a polvere disponibile in diverse finiture: bianco, nero, cromo, brass, champagne e rose gold.

Projector for 220V track for LED (COB) CRI 90, 3000K (2700K light source on request) supplied in direct current with recessed convertor located inside the product's adaptor. Q4 220V is a light fitting for interiors which guarantees minimum visual impact, completely adjustable at 360°; it is available in a variety of optics. High performance projector in powdered varnish aluminium available in various finishes: black, white, chromed, brass, champagne and rose gold.

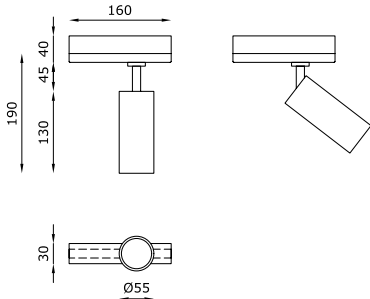

CODE COMPOSITION


T220 L 00008		0
		<i>dimmiability</i>
ND		non dimmable
DA		DALI
		<i>light colour</i>
27		2700K
30		3000K
		<i>lens</i>
14		14°
34		34°
55		55°
		<i>finishing</i>
W1		white
B1		black
CP		chromed
BR		brass
A1		champagne
A2		rose gold

example of code composition T220 L 00008 **W1 14 27 ND** 0

TECHNICAL FEATURES

Code	T220 L 00008 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Chromed Brass Champagne Rose Gold
Weight	0.5 Kg
Mounting	Track 220V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 9W
Luminous efficacy	850 lm - 3000K
Light distribution	Beam 34° Beam 14° 55° (on request)
Light colour	White 3000K White 2700K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	-
Note	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track. Black tige for Q4 220V chromed, brass, champagne and rose gold.

INCISO Q4 220V

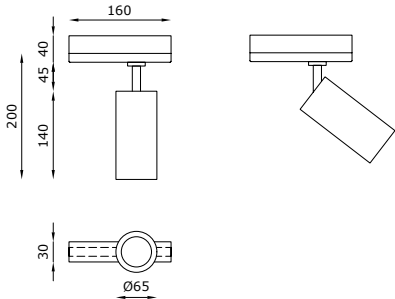

CODE COMPOSITION

T220 L 00016		0
		dimmiability
ND	non dimmable	
DA	DALI	
		light colour
27	2700K	
30	3000K	
		lens
14	14°	
34	34°	
55	55°	
		finishing
T1	see texture below	
T2	see texture below	
T3	see texture below	
T4	see texture below	


example of code composition T220 L 00016 T1 14 27 ND 0

TECHNICAL FEATURES

Code	T220 L 00016 XX
Type	Projector ± 360° / ± 90°
Material	DurCoral®
Finishing	T1 T2 T3 T4
Weight	0.6 Kg
Mounting	Track 220V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 9W
Luminous efficacy	850 lm - 3000K
Light distribution	Beam 34° Beam 14° 55° (on request)
Light colour	White 3000K White 2700K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	-
Note	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track.

INCISO Q4 220V è un proiettore da binario dalle caratteristiche uniche. INCISO Q4 220V mantiene le stesse caratteristiche tecniche di Q4 220V, ma dal punto di vista estetico l'utilizzo del materiale DurCoral®, permette di plasmare la materia, incidere e creare dei motivi che lo rendono unico nella sua categoria. La ricerca dei materiali che contraddistingue la collezione Buzzi & Buzzi si unisce alla tecnologia IRON per dare vita ad un prodotto innovativo. Si tratta infatti del primo proiettore in cemento DurCoral® con un'anima in acciaio. DurCoral® è un materiale due volte più resistente del cemento, antiraffio, personalizzabile con qualsiasi tipo di pittura e dalle elevate prestazioni meccaniche.

INCISO Q4 220V is a track projector with unique characteristics. INCISO Q4 220V retains the same technical characteristics as the Q4 220V, but from the aesthetic point of view, the use of the DurCoral® material allows the material to be moulded and engraved to create patterns that make it unique in its category. The research into the materials that characterise the Buzzi & Buzzi collection combine with the IRON technology to create an innovative product. It is in fact the first projector in DurCoral® cement with a steel core. DurCoral® is a material twice as resistant as cement, scratch-proof, customisable with any type of paint and with high mechanical performances.

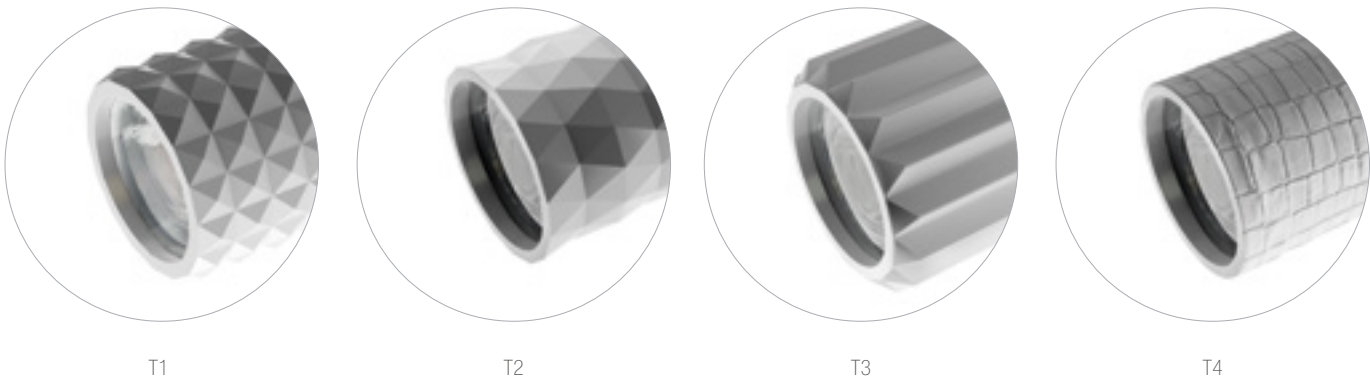




ML 220V



Un punto di vista puntuale, in grado di enfatizzare particolari e spazi esclusivi: ML 220V, apparecchio illuminante da interni per installazione su binario 220V, è caratterizzato da un connubio di precisione e forza. Il proiettore professionale, dalle alte prestazioni, completamente orientabile a 360°, è studiato per avere il minimo impatto visivo.

A punctual point of view able to emphasize details and exclusive spaces: ML 220V, installable on 220V rail, is characterized by a combination of precision and strength. The professional projector, capable of high performances, is designed for having a minimal visual impact and is provided with an adjustable arm which can be inclined up to 360°.

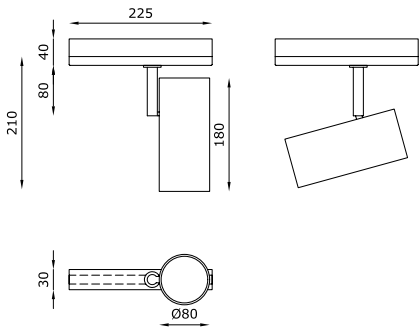

CODE COMPOSITION

T220 L 00009	---	---	---	0		
					<i>dimmability</i>	
					ND	non dimmable
					DA	DALI
					<i>light colour</i>	
					27	2700K
					30	3000K
					40	4000K
					<i>lens</i>	
					24	24°
					38	38°
					<i>finishing</i>	
					W1	white
					B1	black

example of code composition T220 L 00009 **W1 24 27 ND** 0

TECHNICAL FEATURES

Code	T220 L 00009 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black
Weight	1 Kg
Mounting	Track 220V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 26W
Luminous efficacy	3300 lm - 3000K
Light distribution	Beam 24° Beam 38° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	-
Note	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track.


GL 220V



matt black

GL 220V, apparecchio illuminante da interni per installazione su binario a 220V, è caratterizzato da un connubio di precisione e forza. Il proiettore professionale, dalle alte prestazioni, è studiato per avere il minimo impatto visivo, dotato di braccio direzionabile e inclinabile.

GL 220V, a light fitting for interiors for installation on 220V track, it is characterised by a blend of precision and strength. The professional projector, with high performances, is designed to have minimal visual impact, fitted with directional arm and adjustable.




CODE COMPOSITION

T220 L 00010 B1	0	
	dimmability	
	ND	non dimmable
	DA	DALI
	light colour	
	27	2700K
	30	3000K
	40	4000K
	lens	
	24	24°
	38	38°

example of code composition T220 L 00010 B1 24 27 ND 0

TECHNICAL FEATURES



Code	T220 L 00010 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	Black
Weight	1 Kg
Mounting	Track 220V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 26W
Luminous efficacy	3600 lm - 3000K
Light distribution	Beam 24° Beam 38° (on request)
Fitting	-
Light colour	White 3000K White 2700K I 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	-
Note	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track.

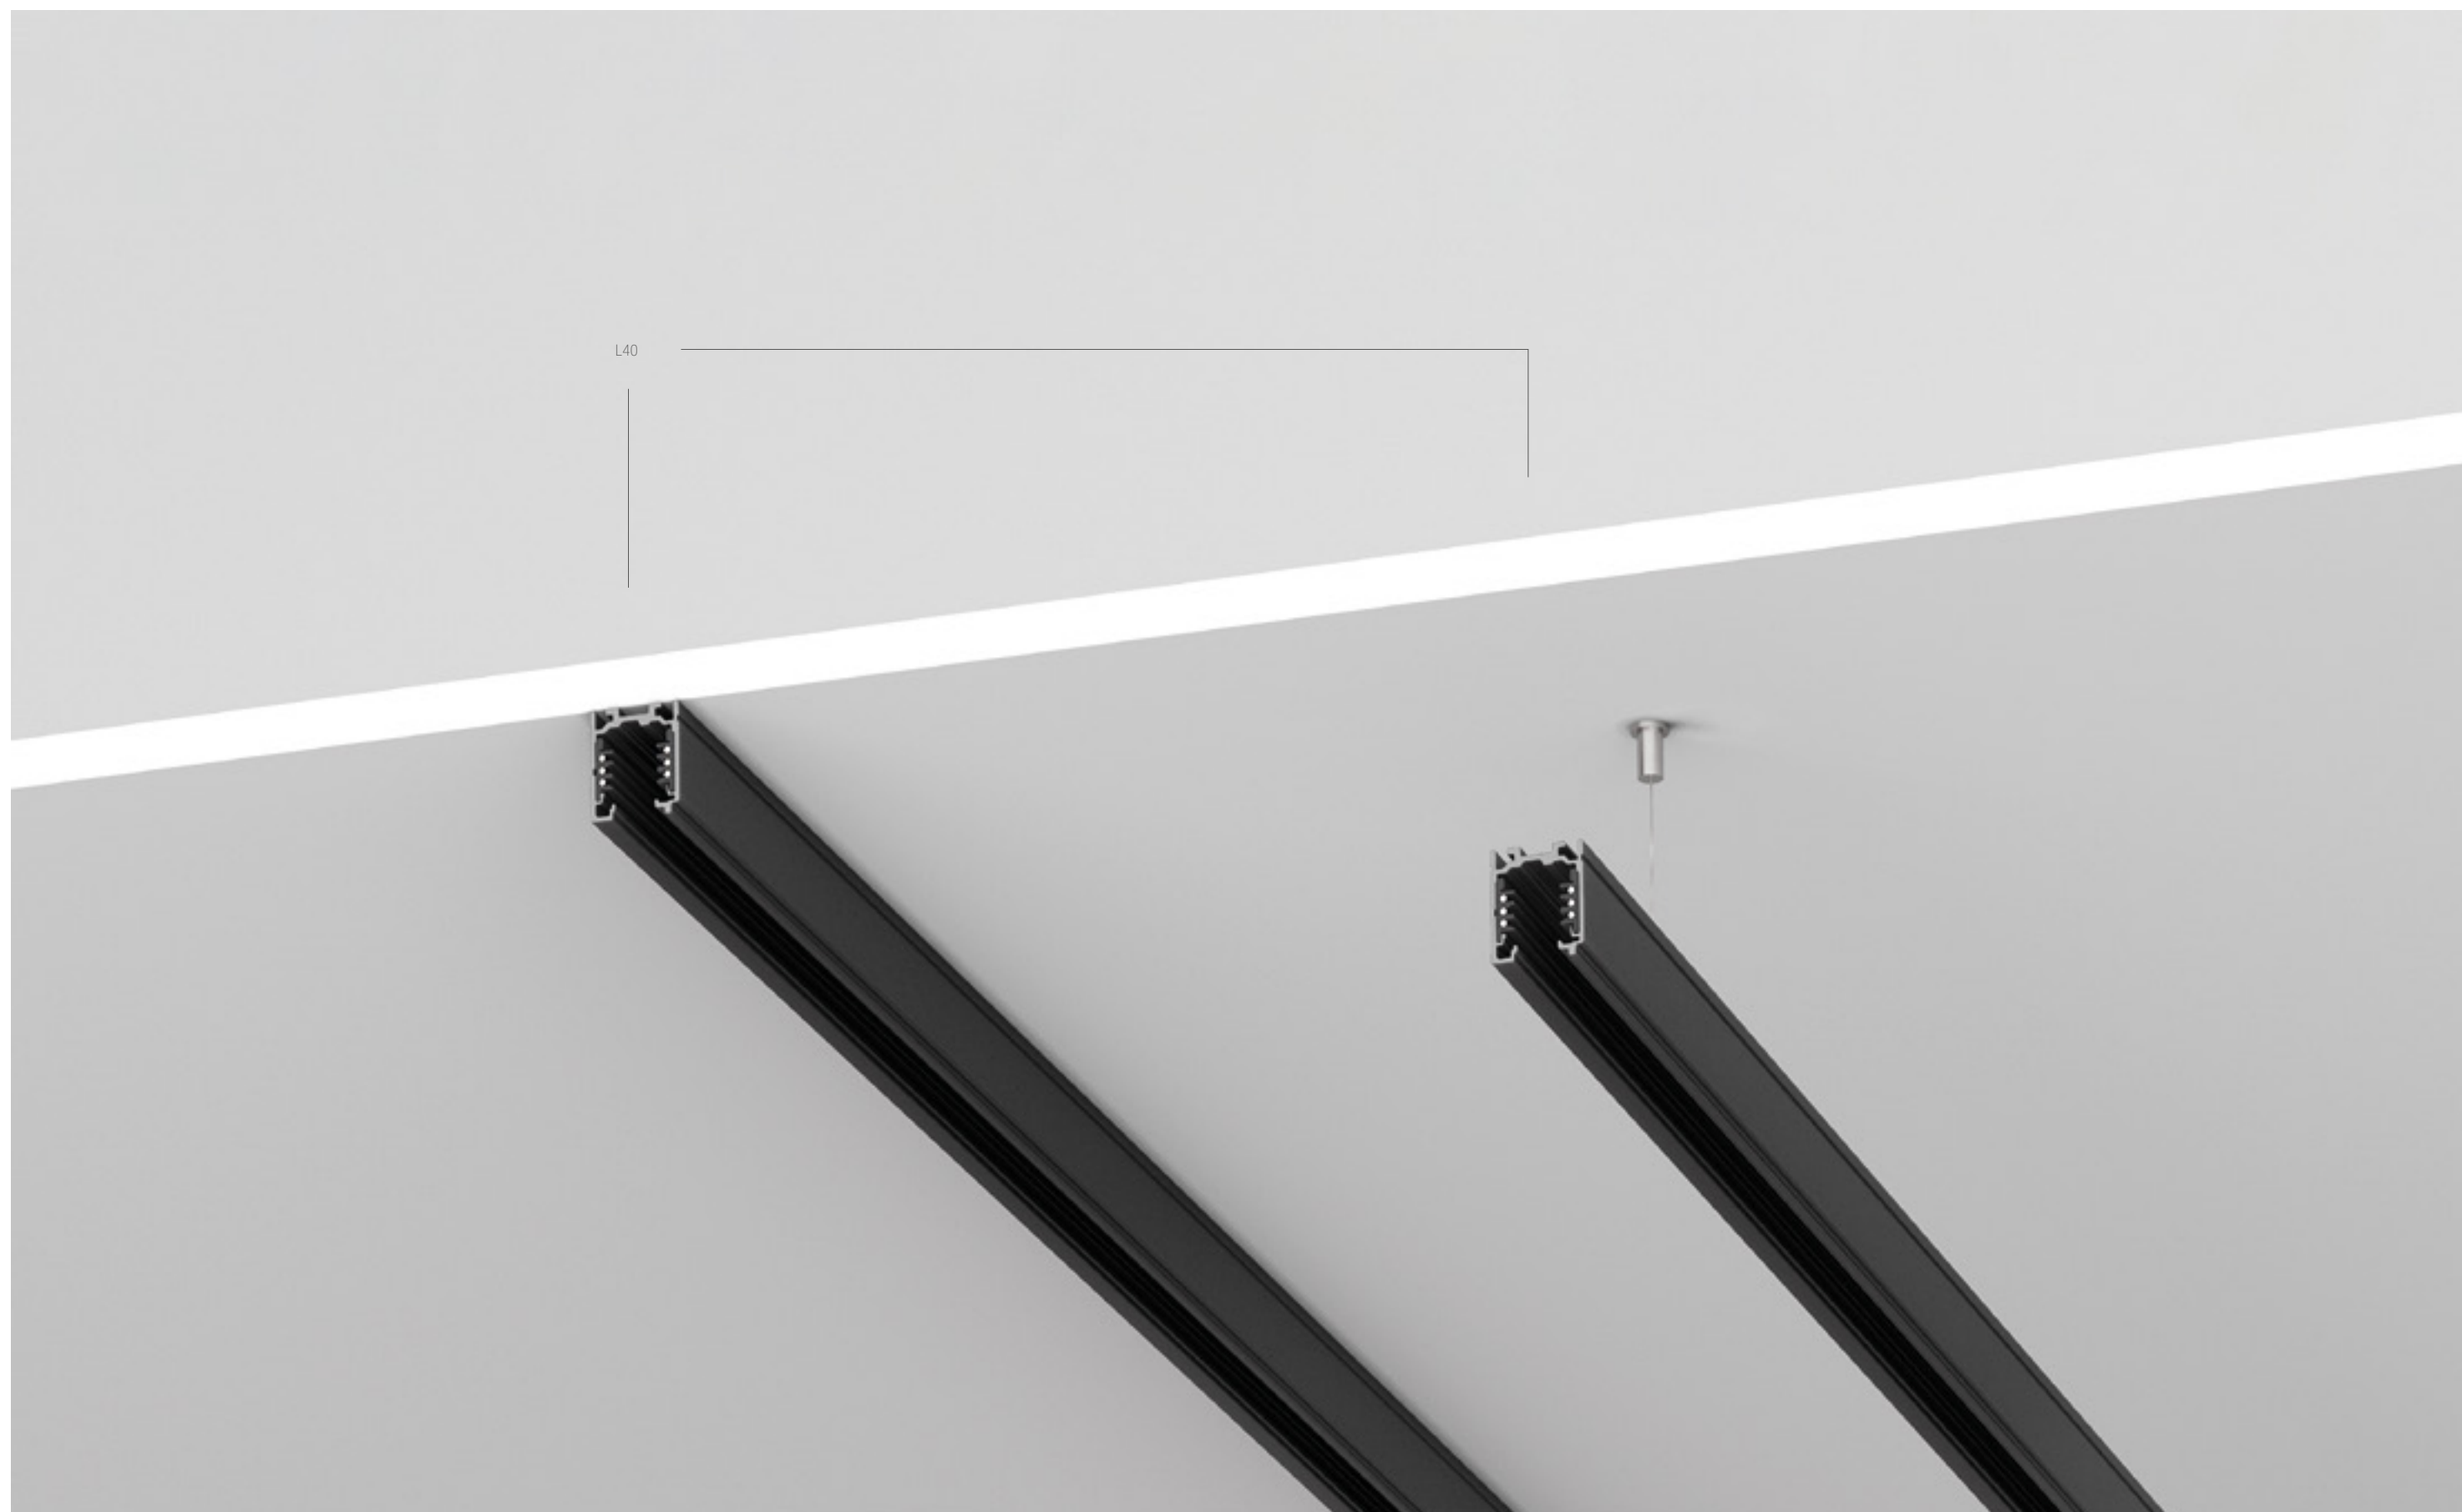

L40



- matt white RAL 9010 painted
- matt black RAL 9005 painted

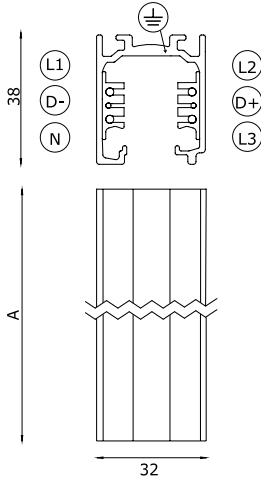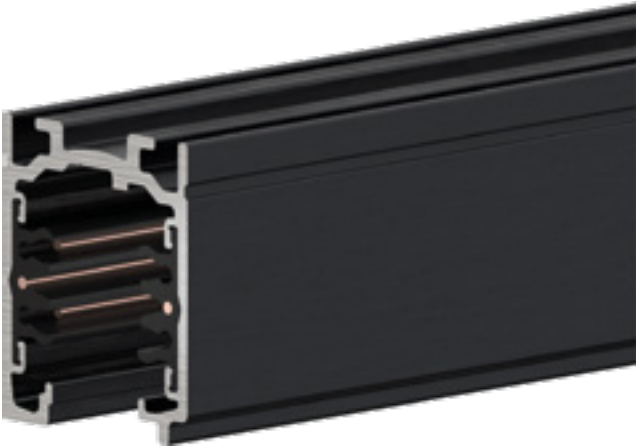

LIGHT MODULES

GL 220V
174

INCISO Q4 220V
168

M1 220V
150

ML 220V
172

Q1 220V
154

Q2 220V
158

Q3 220V
162

Q4 220V
166

X1 220V
140

Y1 220V
142

Z1 220V
146

Sistema di illuminazione da interno per installazione a sospensione e a superficie. Il profilo ha dimensioni minimali e lunghezze comprese fra 1 m e 3 m, è realizzato in alluminio estruso con finitura nero o bianco, dotato di 6 conduttori in rame.

L40 a 220V si completa a sua volta con tutti i prodotti di illuminazione Buzzi & Buzzi dotati di un'elettronica integrata.

Lighting system for interiors for pendant and surface installation. The profile has minimum dimensions and lengths between 1 and 3 m. It is made in extruded aluminium with black or white finish, fitted with 6 copper wires.

The 220V L40 is in turn completed with all Buzzi & Buzzi lighting products fitted with integrated electronics.

CODE COMPOSITION

T220 T 03	_ 1 _ 2		
		<i>length</i>	
		01	1000 mm
		02	2000 mm
		03	3000 mm
		<i>finishing</i>	
		W2	white
		B1	black
example of code composition		T220 T 03 W2 1 01 2	

TECHNICAL FEATURES

Code	T220 T 03 XX
Type	Three-phase track
Material	Aluminum
Finishing	White RAL 9010 Black RAL 9005
Weight	-
Mounting	Surface Suspension
IP rating	-
Insulation class	-
Control gear	-
Dimensions	A: 1000 mm 2000 mm 3000 mm
Cut out for plasterboard	-
Voltage connection	220-240V · 50/60Hz
Circuits	L1/L2/L3/N/terra 16A-440V + D+/D- 2 x 1A · 50V ac FELV (DALI)
Load on phases	3.6kVA / 10.8kVA
Note	The supply connectors, plugs and further fixture accessories must be ordered separately.
	Any 90° connector must be ordered separately to ensure electric continuity in the corners.
	Light points cannot be installed in the corners.
	For ceiling or wall mounting, it's sufficient to fix the rail directly with self-tapping countersunk head screws, while the suspended installation requires the purchase of the specific kit.

TESTATA
DI ALIMENTAZIONE
POWER HEAD




CODE COMPOSITION

T220 A 000_	finishing	
	27 W2	white RAL 9010
	28 B1	black RAL 9005

example of code composition T220 A 000**27 W2**

TECHNICAL FEATURES

Code	T220 A XX
Type	Power head with polarity on the right
Material	Polycarbonate
Finishing	White RAL 9010  Black RAL 9005 
Fixing	Plug-in
Insulation class	-
Voltage connection	16A · 440V, 1A · 50V ac FELV 220-240V · 50/60Hz
Load on phases	Max 3.6kVA / 10.8kVA
Note	-



GIUNTO PASSANTE
THROUGH JOINT




CODE COMPOSITION

T220 A 000_	finishing	
	29 W2	white RAL 9010
	30 B1	black RAL 9005

example of code composition T220 A 000**29 W2**

TECHNICAL FEATURES

Code	T220 A XX
Type	Electrified through joint
Material	Polycarbonate
Finishing	White RAL 9010  Black RAL 9005 
Fixing	Plug-in
Insulation class	-
Voltage connection	16A · 440V, 1A · 50V ac FELV 220-240V · 50/60Hz
Load on phases	Max 3.6kVA / 10.8kVA
Note	Insert the electrified joint between two three-phase tracks taking care to keep the polarity in the same position so as to guarantee electric continuity between the tracks.



GIUNTO PASSANTE E
DI ALIMENTAZIONE
SUPPLY THROUGH JOINT




CODE COMPOSITION

T220 A 000_	finishing	
	54 W2	white RAL 9010
	55 B1	black RAL 9005

example of code composition T220 A 000**54 W2**

TECHNICAL FEATURES

Code	T220 A XX
Type	Supply through joint
Material	Polycarbonate
Finishing	White RAL 9010  Black RAL 9005 
Fixing	Plug-in
Insulation class	-
Voltage connection	16A · 440V, 1A · 50V ac FELV 220-240V · 50/60Hz
Load on phases	Max 3.6kVA / 10.8kVA
Note	The supply joint makes it possible to electrify the track from any point on its length and not from a head. Insert the supply through joint between two three-phase tracks taking care to maintain the polarity in the same position so as to guarantee electric continuity between the tracks. Necessary in all those situations where it is not possible to feed from a head or when you want to create closed figures.



GIUNTO ANGOLARE A 90°
PER CURVA A DESTRA
90° CORNER JOINT
FOR RIGHT TURN




CODE COMPOSITION

T220 A 000_	finishing	
	31 W2	white RAL 9010
	32 B1	black RAL 9005

example of code composition T220 A 000**31 W2**

TECHNICAL FEATURES

Code	T220 A XX
Type	Electrified 90° corner joint for right-hand turn with internal polarity and external grounding
Material	Polycarbonate
Finishing	White RAL 9010  Black RAL 9005 
Fixing	Plug-in
Insulation class	-
Voltage connection	16A · 440V, 1A · 50V ac FELV 220-240V · 50/60Hz
Load on phases	max 3.6kVA / 10.8kVA
Note	Electrified 90° angle connector to insert between two three-phase tracks, taking care to maintain polarity in the same position so as to guarantee electric continuity between the tracks. Light points cannot be installed in the corners.



GIUNTO ANGOLARE A 90°
PER CURVA A SINISTRA
90° CORNER JOINT
FOR LEFT TURN




CODE COMPOSITION

T220 A 000_	finishing	
	33 W2	white RAL 9010
	34 B1	black RAL 9005

example of code composition T220 A 000**33 W2**

TECHNICAL FEATURES

Code	T220 A XX
Type	Electrified 90° corner joint for left-hand turn with external polarity and internal grounding
Material	Polycarbonate
Finishing	White RAL 9010  Black RAL 9005 
Fixing	Plug-in
Insulation class	-
Voltage connection	16A · 440V, 1A · 50V ac FELV 220-240V · 50/60Hz
Carico sulle fasi	max 3.6kVA / 10.8kVA
Note	Electrified 90° angle connector to insert between two three-phase tracks, taking care to maintain polarity in the same position so as to guarantee electric continuity between the tracks. Light points cannot be installed in the corners.



GIUNTO A “X”
“X” CONNECTOR




CODE COMPOSITION

T220 A 000_	finishing	
	39 W2	white RAL 9010
	40 B1	black RAL 9005

example of code composition T220 A 000**39 W2**

TECHNICAL FEATURES

Code	T220 A XX
Type	Electrified “X” connector
Material	Polycarbonate
Finishing	White RAL 9010  Black RAL 9005 
Fixing	Plug-in
Insulation class	-
Voltage connection	16A · 440V, 1A · 50V ac FELV 220-240V · 50/60Hz
Load on phases	Max 3.6kVA / 10.8kVA
Note	Electrified “X” connector between four three-phase perpendicular tracks to be positioned taking care to maintain polarity in the same position so as to guarantee electric continuity between the tracks. Light points cannot be installed in the corners.



GIUNTO A “T” PER
INTERSEZIONE A DESTRA
“T” CONNECTOR
FOR RIGHT INTERSECTION




CODE COMPOSITION

T220 A 000_	finishing	
	35 W2	white RAL 9010
	36 B1	black RAL 9005

example of code composition T220 A 000**35 W2**

TECHNICAL FEATURES

Code	T220 A XX
Type	Electrified “T” connector for right intersection with internal polarity on the left and external grounding on the right
Material	Polycarbonate
Finishing	White RAL 9010  Black RAL 9005 
Fixing	Plug-in
Insulation class	-
Voltage connection	16A · 440V, 1A · 50V ac FELV 220-240V · 50/60Hz
Load on phases	3.6kVA / 10.8kVA
Note	Electrified “T” connector to be inserted between three three-phase tracks taking care to maintain polarity in the same positions so as to guarantee electric continuity between the tracks. Light points cannot be installed in the corners.



GIUNTO A “T” PER
INTERSEZIONE A DESTRA
“T” CONNECTOR
FOR RIGHT INTERSECTION




CODE COMPOSITION

T220 A 000_	finishing	
	50 W2	white RAL 9010
	51 B1	black RAL 9005

example of code composition T220 A 000**50 W2**

TECHNICAL FEATURES

Code	T220 A XX
Type	Electrified “T” connector for right intersection with internal polarity on the right and external grounding on the left
Material	Polycarbonate
Finishing	White RAL 9010  Black RAL 9005 
Fixing	Plug-in
Insulation class	-
Voltage connection	16A · 440V, 1A · 50V ac FELV 220-240V · 50/60Hz
Load on phases	3.6kVA / 10.8kVA
Note	Electrified “T” connector to be inserted between three three-phase tracks taking care to maintain polarity in the same positions so as to guarantee electric continuity between the tracks. Light points cannot be installed in the corners.



GIUNTO A “T” PER
INTERSEZIONE A SINISTRA
“T” CONNECTOR
FOR LEFT INTERSECTION




CODE COMPOSITION

T220 A 000_	<i>finishing</i>	
	37 W2	white RAL 9010
	38 B1	black RAL 9005
example of code composition	T220 A 000 37 W2	

TECHNICAL FEATURES

Code	T220 A XX	
Type	Electrified “T” connector for intersection on the left with external polarity on the left and internal grounding on the right	
Material	Polycarbonate	
Finishing	White RAL 9010	
	Black RAL 9005	
Fixing	Plug-in	
Insulation class	-	
Voltage connection	16A · 440V, 1A · 50V ac FELV 220-240V · 50/60Hz	
Load on phases	3.6kVA / 10.8kVA	
Note	Electrified “T” connector to be inserted between three three-phase tracks taking care to maintain polarity in the same positions so as to guarantee electric continuity between the tracks. Light points cannot be installed in the corners.	



GIUNTO A “T” PER
INTERSEZIONE A SINISTRA
“T” CONNECTOR
FOR LEFT INTERSECTION




CODE COMPOSITION

T220 A 000_	<i>finishing</i>	
	52 W2	white RAL 9010
	53 B1	black RAL 9005
example of code composition	T220 A 000 52 W2	

TECHNICAL FEATURES

Code	T220 A XX	
Type	Electrified “T” connector for intersection on the left with external polarity on the right and internal grounding on the left	
Material	Polycarbonate	
Finishing	White RAL 9010	
	Black RAL 9005	
Fixing	Plug-in	
Insulation class	-	
Voltage connection	16A · 440V, 1A · 50V ac FELV 220-240V · 50/60Hz	
Load on phases	3.6kVA / 10.8kVA	
Note	Electrified “T” connector to be inserted between three three-phase tracks taking care to maintain polarity in the same positions so as to guarantee electric continuity between the tracks. Light points cannot be installed in the corners.	



GIUNTO FLESSIBILE
FLEXIBLE JOINT




CODE COMPOSITION

T220 A 000_	<i>finishing</i>	
	41 W2	white RAL 9010
	42 B1	black RAL 9005
example of code composition	T220 A 000 41 W2	

TECHNICAL FEATURES

Code	T220 A XX	
Type	Flexible electrified joint	
Material	Polycarbonate	
Finishing	White RAL 9010	
	Black RAL 9005	
Fixing	Plug-in	
Insulation class	-	
Voltage connection	16A · 440V, 1A · 50V ac FELV 220-240V · 50/60Hz	
Load on phases	3.6kVA / 10.8kVA	
Note	Use the flexible electrified joint to connect the two tracks on different surfaces (ceiling-wall) or to create angles other than 90° and guarantee that the current passes through. Insert the flexible electrified joint, supplied pre-wired, between two three-phase tracks taking care to maintain polarity in the same position so as to guarantee electric continuity between the tracks. Light points cannot be installed in the corners.	



TAPPO DI CHIUSURA
CLOSURE PLUG




CODE COMPOSITION

T220 A 000_	<i>finishing</i>	
	43 W2	white RAL 9010
	44 B1	black RAL 9005
example of code composition	T220 A 000 43 W2	

TECHNICAL FEATURES

Code	T220 A XX	
Type	Closure plug	
Material	Polycarbonate	
Finishing	White RAL 9010	
	Black RAL 9005	
Fixing	By screws	
Insulation class	-	
Voltage connection	-	
Load on phases	-	
Note	-	



COVER DI CHIUSURA
CLOSING COVER



CODE COMPOSITION


T220 A 000_	<i>finishing</i>	
	45 W2	white RAL 9010
	46 B1	black RAL 9005
example of code composition	T220 A 000 45 W2	

TECHNICAL FEATURES

Code	T220 A XX	
Type	Aesthetic closing cover	
Material	PVC	
Finishing	White RAL 9010	
	Black RAL 9005	
Fixing	-	
Insulation class	-	
Dimensions	L 1000 mm	
Note	Aesthetic cover to close the track installable on the bottom between the various light points, to hide the internal part of the track and to permit aesthetic continuity. Electrified “T” connector to be inserted between three three-phase tracks taking care to maintain polarity in the same positions so as to guarantee electric continuity between the tracks. Light points cannot be installed in the corners.	




TRONCHESE
CUTTER



CODE COMPOSITION

TRK 00000 42		
Code	TRK 00000 42	
Type	Conductor cutting pliers	
Material	-	
Finishing	-	
Fixing	-	
Note	The 1000/2000/3000 mm long tracks are supplied with copper wires already tested with respect to the aluminium in order to prevent the copper terminals from coming into contact with each other, in the case of double power supply, or, to prevent them from touching each other, if closure plugs are used. If it should be necessary to shorten the length of the track during installation, use the special cutting nippers taking care to pull out the four wires by at least 5 mm to guarantee correct electric distances.	



KIT SOSPENSIONE
E GIUNZIONE
SUSPENSION
AND JUNCTION KIT




CODE COMPOSITION

T220 A 000_	<i>finishing</i>	
	47 W2	white RAL 9010
	48 B1	black RAL 9005
example of code composition	T220 A 000 47 W2	

TECHNICAL FEATURES

Code	T220 A XX	
Type	Suspension and junction kit	
Material	Steel	
Finishing	White RAL 9010	
	Black RAL 9005	
Fixing	-	
Note	Wire 3 m long (on request available in different lengths). Kit composed of a metallic spherical rose, steel lead Ø 1.5 mm with 3 m length and automatic screw coupling fixed to the bracket. Position the fixture kit with an inter-axis of 450 mm for a max capacity of 36 kg or of 900 mm for max 25 kg. The finish refers only to the bracket.	

EXAMPLE OF INSTALLATION

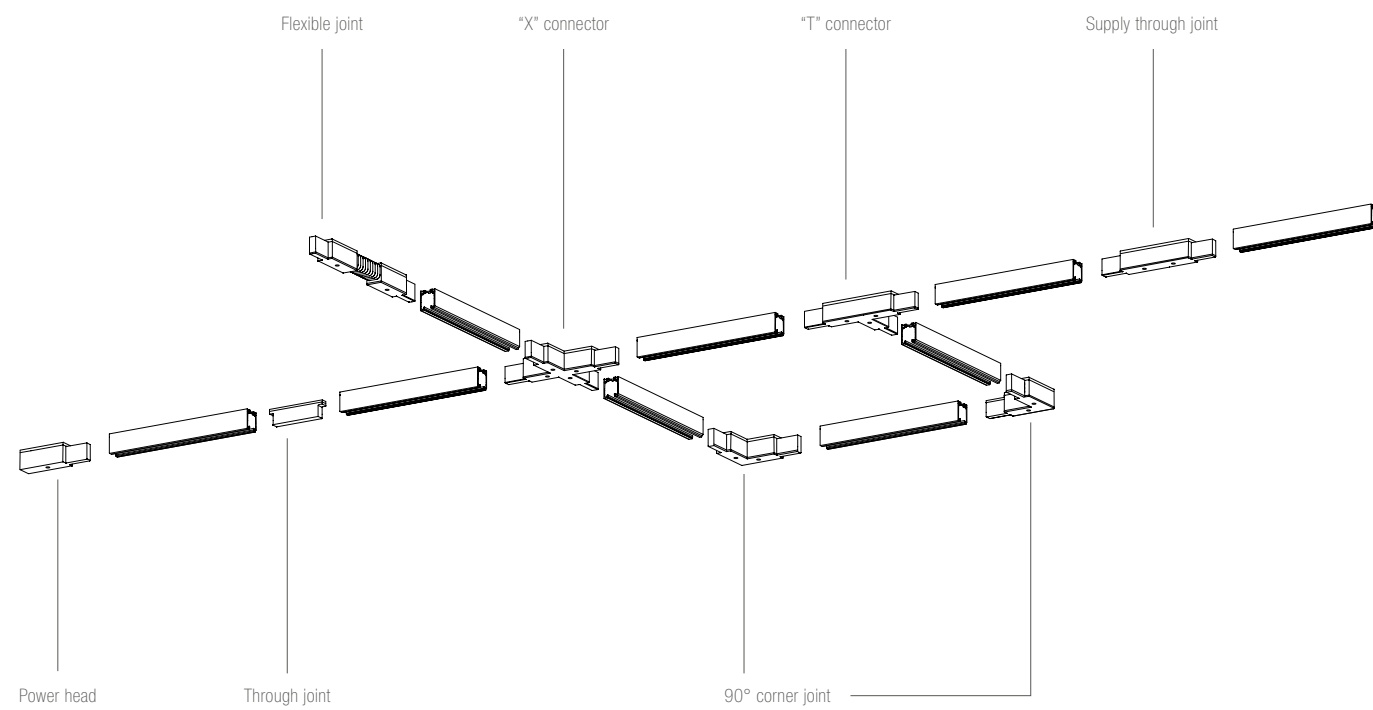




Indoor stand alone Indoor stand alone Indoor stand alone Indoor stand alone Indoor stand alone

192	Y1D
194	F50
198	XJR8
202	XJR9
206	Genius Basic Naked
208	Genius Naked
214	Twin Genius Naked
216	Genius Concrete

Recessed

STAND ALONE

Y1D

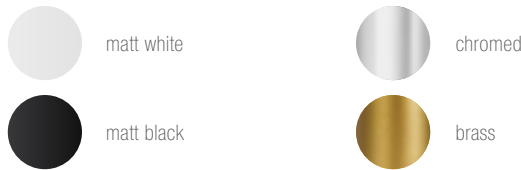


INCASSO IN BATTUTA.

Y1D è un proiettore cilindrico per ambienti interni, adatto per installazioni a soffitto o parete, con dimensioni molto ridotte per un minimo impatto visivo della sorgente. Ha finitura di serie bianca o nera opaca e ottiche intercambiabili. Y1D è dotato di un sistema di braccio orientabile a 360°, dagli snodi invisibili. Ha un output luminoso in grado di valorizzare gli ambienti con linearità ed eleganza e, grazie alla sorgente retrocessa, garantisce la riduzione dell'abbagliamento, per il massimo comfort visivo.

RECESSED TILL END POSITION.

Y1D is a cylindrical projector for indoor environments, suitable for ceiling or wall installations, with small dimensions for minimum visual impact of the light source. It is produced with a white or opaque black finish with interchangeable optics. Y1D is fitted with a 360 degrees-adjustable arm system, with invisible joints. Its light output can valorise environments with linearity and elegance and, thanks to the recessed light source it reduces the glaring effect, for maximum visual comfort.



CODE COMPOSITION

1053	_	4	R	_	E	_	WD	
								light colour
								27 2700K
								30 3000K
								40 4000K
								lens
								22 22°
								50 50°
								finishing
								WH white
								BL black
								CP chromed
								BR brass
								example of code composition
								1053 WH 4 R 22 E 27 WD

TECHNICAL FEATURES

Code	1053 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Chromed Brass
Weight	0.4 Kg
Mounting	Wall and ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver (not included)
Cut out for plasterboard	Ø 40 mm
Lamp type	LED 700 mA Vf: 11.5 VDC
Lamp wattage	1 x 8W
Luminous efficacy	800 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	By driver
CRI	>90
Emergency	On request
Note	Black tige and roof plate for Y1D chromed and brass.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1053 XX	H8700.E	Constant current electronic driver. Remote installation	Suitable for n°1, n°2 or n°3 code 1053 XX - 700 mA

F50




matt white

MINI INCASSO IN BATTUTA CON DIAMETRO 35 mm.

Una luce puntuale che definisce gli spazi. F50 è un incasso da interni per installazione in parete e soffitto di cartongesso, disponibile con finitura bianca, in grado di inserirsi nelle superfici. Essenziale e deciso, è una fonte di luce pura, per un risultato inconfondibile.

MINI RECESSED LUMINAIRE WITH A DIAMETER OF 35 mm.

A punctual light which defines spaces. F50 is a recessed indoor luminaire installable on plasterboard walls and ceilings and available with white finishings. It is a product which perfectly integrates itself with the surfaces it applies to. Sharp and essential, it is a pure source of light which gives a unique effect.



CODE COMPOSITION

1022 WH 2 R 00 E _ WD

light colour

27 2700K
30 3000K

example of code composition 1022 WH 2 R 00 E 30 WD

TECHNICAL FEATURES

Code	1022 XX
Type	Downlight 90° I Wall recessed 90°
Material	Aluminum
Finishing	White
Weight	0.04 Kg
Mounting	Wall and ceiling recessed
IP rating	IP20
Insulation class	III
Control gear	Constant current electronic driver (not included)
Cut out for plasterboard	Ø 32 mm
Lamp type	LED Vf: 3 VDC
Lamp wattage	1W - 350mA I 2W - 500mA
Luminous efficacy	75 lm - 3000K - 350mA I 170 lm - 3000K - 500mA
Light distribution	Wide beam 120°
Fitting	-
Light colour	White 3000K White 2700K (on request)
Voltage connection	By driver (optional)
CRI	>90
Emergency	-
Note	On request available dimmable PUSH or DALI, remote installation.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1022 XX	H8350	Constant current electronic driver	Suitable for n°1 code 1022 XX - 350 mA
	H8500.B	Constant current electronic driver. Remote installation	Suitable for n°5 code 1022 XX - 500 mA
	H8500.C	Constant current electronic driver. Remote installation	Suitable for n°2 code 1022 XX - 500 mA




XJR8



XJR8 sa rispondere con tecnicità alle richieste di ogni singolo ambiente: apparecchio da interni a incasso per installazione in parete e soffitto di cartongesso disponibile con finitura bianca. La sorgente luminosa, retrocessa e con meccanica a vista orientabile, dona una luce precisa e puntuale senza sacrificare l'eleganza degli spazi.

XJR8, a recessed indoor luminaire installable on plasterboard walls or ceilings, provides technical quality for any types of environment. Available with white finishings, it has a backward light source with visible mechanisms which emanates precise and punctual beams without renouncing space elegance.



CODE COMPOSITION

1031 WH 2 R 40 E _ WD	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K
1034 WH 4 R 40 E 98 WD		
example of code composition 1031 WH 2 R 40 E 30 WD		


TECHNICAL FEATURES

Code	1031 XX	1034 XX
Type	Tilttable downlight and wall recessed ± 30° 	Tilttable downlight and wall recessed ± 30°
Material	Aluminum	Aluminum
Finishing	White	White
Weight	0.25 Kg	0.25 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Constant current electronic driver (not included)	Remote constant current electronic driver** (not included)
Cut out for plasterboard	76 x 76 mm	76 x 76 mm
Lamp type	LED 500 mA Vf: 18 VDC	LED 350 mA Vf: 17 VDC
Lamp wattage	1 x 9W	1 x 6W
Luminous efficacy	1125 lm - 3000K	600 lm (from 1800K up to 3000K)
Light distribution	Wide beam 40°	Wide beam 40°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	Dimming range 1800/3000K
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	95
Emergency	-	-
Note	On request available dimmable PUSH or DALI.	On request available dimmable PUSH or DALI, remote installation.

**XJR8 Dim to Warm requires dimming: amplitude (AM) IEEE1789-2015 dim to warm wide range input voltage.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1031 XX	H8500.E	Constant current electronic driver	Suitable for n°2 code 1031 XX - 500 mA
	H8500.B	Constant current electronic driver	Suitable for n°1 code 1031 XX - 500 mA
1034 XX	H8350DA.AM	Dimming: amplitude (AM) DALI	Suitable for n°2 code 1034 XX
	H8350PH.AM	Dimming: amplitude (AM) PUSH	Suitable for n°2 code 1034 XX



CODE COMPOSITION

1032 WH 6 R 00 E 00 WD

1033 WH 6 R 00 E 00 WD

TECHNICAL FEATURES

Code	1032 XX		1033 XX
Type	Tilttable downlight and wall recessed +/-30° 		Tilttable downlight and wall recessed +/-30° 
Material	Aluminum		Aluminum
Finishing	White		White
Weight	0.15 Kg		0.15 Kg
Mounting	Wall and ceiling recessed		Wall and ceiling recessed
IP rating	IP20		IP20
Insulation class	III		I
Control gear	Electronic transformer (not included)		-
Cut out for plasterboard	76 x 76 mm		76 x 76 mm
Lamp type	QR CB 51 		QPAR 16 
Lamp wattage	50W max		50W max
Luminous efficacy	-		-
Light distribution	-		-
Fitting	GU5.3		GU10
Light colour	-		-
Voltage connection	By driver (optional)		220-240V · 50/60Hz
CRI	-		-
Emergency	-		-
Note	-		-

OPTIONAL ACCESSORIES

product code	optional code	description	info
1032 XX	H8060.LED	Dimmable electronic transformer	Max watt 60W Volts · Hz 230/12V · 50/60Hz
	0008KIT	Kit LED dimmable	Bulb 7W · 12V
1033 XX	0009KIT	Kit LED dimmable	Bulb 6W · 220-240V




XJR9



La soluzione ottimale per sottolineare dettagli e particolari: XJR9, apparecchio da interni a incasso per installazione in parete o soffitto di cartongesso, disponibile con finitura bianca, è una lezione di equilibrio tra bellezza ed eleganza, stile e discrezione. La sorgente luminosa, con meccanica a vista orientabile, crea una luce che sa impreziosire gli ambienti senza sovrapporsi ad essi.

The best solutions for underlining details and hues: XJR9, a recessed indoor luminaire installable on plasterboard walls or ceilings, is available with white finishings and provides a balance between beauty and elegance, style and discretion. The light source with adjustable visible mechanisms creates beams which embellish the environment without invading it.



CODE COMPOSITION

1041 WH 2 R 40 E _ WD	light colour	
	27	2700K
	30	3000K
	40	4000K
1044 WH 4 R 40 E 98 WD		
example of code composition 1041 WH 2 R 40 E 30 WD		


TECHNICAL FEATURES

Code	1041 XX	1044 XX
Type	Tilttable downlight and wall recessed ± 30° 	Tilttable downlight and wall recessed ± 30°
Material	Aluminum	Aluminum
Finishing	White	White
Weight	0.20 Kg	0.20 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Constant current electronic driver (not included)	Remote constant current electronic driver** (not included)
Cut out for plasterboard	Ø 75 mm	Ø 75 mm
Lamp type	LED 500 mA ⚡ Vf: 18 VDC	LED 350 mA ⚡ Vf: 17 VDC
Lamp wattage	1 x 9W	1 x 6W
Luminous efficacy	1125 lm - 3000K	600 lm (from 1800K up to 3000K)
Light distribution	Wide beam 40°	Wide beam 40°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	Dimming range 1800/3000K
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	95
Emergency	-	-
Note	On request available dimmable PUSH or DALI.	On request available dimmable PUSH or DALI, remote installation.

**XJR9 Dim to Warm requires dimming: amplitude (AM) IEEE1789-2015 dim to warm wide range input voltage.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1041 XX	H8500.E	Constant current electronic driver	Suitable for n°2 code 1041 XX - 500 mA
	H8500.B	Constant current electronic driver	Suitable for n°1 code 1041 XX - 500 mA
1044 XX	H8350DA.AM	Dimming: amplitude (AM) DALI	Suitable for n°2 code 1044 XX
	H8350PH.AM	Dimming: amplitude (AM) PUSH	Suitable for n°2 code 1044 XX



CODE COMPOSITION

1042 WH 6 R 00 E 00 WD

1043 WH 6 R 00 E 00 WD

TECHNICAL FEATURES

Code	1042 XX	1043 XX
Type	Tilttable downlight and wall recessed +/-30° 	Tilttable downlight and wall recessed +/-30° 
Material	Aluminum	Aluminum
Finishing	White	White
Weight	0.10 Kg	0.10 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP20	IP20
Insulation class	III	I
Control gear	Electronic transformer (not included)	-
Cut out for plasterboard	Ø 75 mm	Ø 75 mm
Lamp type	QR CB 51 	QPAR 16 
Lamp wattage	50W max	50W max
Luminous efficacy	-	-
Light distribution	-	-
Fitting	GU5.3	GU10
Light colour	-	-
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	-	-
Emergency	-	-
Note	-	-

OPTIONAL ACCESSORIES

product code	optional code	description	info
1042 XX	H8060.LED	Dimmable electronic transformer	Max watt 60W Volts · Hz 230/12V · 50/60Hz
	0008KIT	Kit LED dimmable	Bulb 7W · 12V
1043 XX	0009KIT	Kit LED dimmable	Bulb 6W · 220-240V



GENIUS BASIC NAKED







IL PIÙ COMPATTO DA INSTALLARE SU QUALSIASI MATERIALE.

Apparecchio da incasso a scomparsa totale per interni, Genius Basic Naked è una variante di Genius Basic, che unisce alle sue note caratteristiche la possibilità di integrazione superficiale in qualunque contesto e materiale. Questo nuovo Genius non solo estende la consueta affidabilità tecnica di Buzzi & Buzzi al concetto di Contract Business, ma è anche installabile su legno, cemento, specchio, marmo, moduli industriali con uno spessore da 4 mm a massimo 30 mm. Inoltre, questa versione è ancora più compatta ed offre la possibilità di installazione in soli 80 mm di intercapedine. Genius Basic Naked è la sintesi della tecnologia Buzzi & Buzzi in termini di versatilità ed efficienza: unica parte visibile è il foro di soli 20 mm, da cui eroga un flusso di 540 lm; la parte elettrica è estraibile direttamente dal foro luce, senza necessità di alcuna botola di ispezione e tantomeno di interventi invasivi in caso di manutenzione.

THE MOST COMPACT TO INSTALL ON ANY MATERIAL.

A totally recessed indoor luminaire, Genius Basic Naked is a variation of the Genius Basic, blending its characteristic notes with the possibility of surface integration in any context and material. Not only does this new Genius extend the usual technical reliability of Buzzi & Buzzi to the Contract Business concept, but it can also be installed on wood, cement, mirror, marble, industrial modules with a thickness of from 4 mm (0.16") to a maximum of 30 mm (1.18"). This version is also more compact and can be installed in a cavity of only 80 mm (3.15"). Genius Basic Naked is the synthesis of Buzzi & Buzzi technology in terms of versatility and efficiency: the only visible part is the light emission hole measuring only 20 mm (0.79"), which provides a light flow of 540 lm; the electrical part can be removed through the light hole, so there is no need for any inspection hatch, nor for invasive maintenance operations.

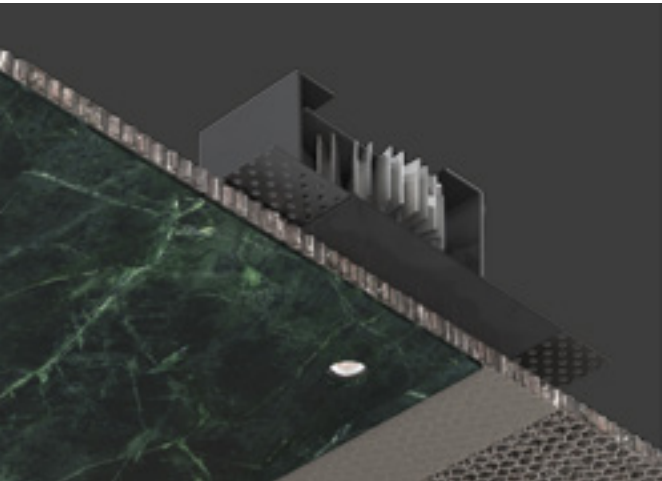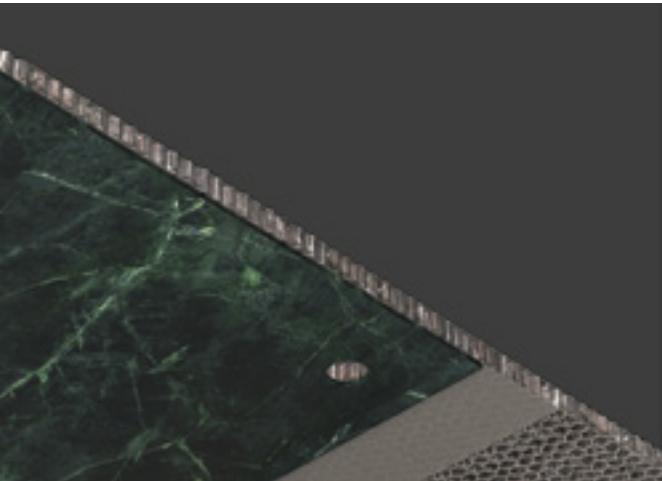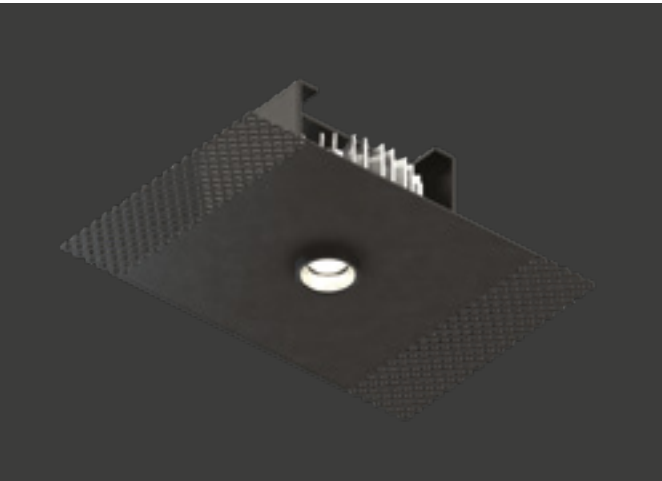

CODE COMPOSITION

1071 BL 4 R 24 E _ WD	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K
1072 BL 4 R 24 E _ ND	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K
example of code composition	1071 BL 4 R 24 E 30 WD	

TECHNICAL FEATURES

Code	1071 XX	1072 XX
Type	Downlight 90° 	Downlight 90°
Material	Aluminum I Steel	Aluminum I Steel
Finishing	Black	Black
Weight	0.65 Kg	0.65 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver and inverter (included)
Lamp type	LED 700 mA Vf: 6.5 VDC	LED 700 mA
Lamp wattage	1 x 4.5W	1 x 4.5W
Luminous efficacy	540 lm - 3000K	540 lm - 3000K
Light distribution	Wide beam 24°	Wide beam 24°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Note	On request available dimmable PUSH or DALI, remote installation.	On request available dimmable PUSH or DALI, remote installation.
	Suitable for installation on surfaces max 30 mm deep.	Suitable for installation on surfaces max 30 mm deep.
	This product could be ordered with IP65 protection grade (see OUTDOOR section - code 2071).	This product could be ordered with IP65 protection grade (see OUTDOOR section - code 2072).

OPTIONAL ACCESSORIES

product code	optional code	description	info
1071 XX	H8700.E	Constant current electronic driver. Remote installation	Suitable for n°3 code 1071 XX - 700 mA

GENIUS NAKED




UN GENIUS NUDO ADATTO PER QUALSIASI SUPPORTO E MATERIALE.

Genius Naked è l'evoluzione della famiglia Genius, che estende il concetto di totale integrazione superficiale a qualsiasi materiale e contesto. E' un apparecchio a scomparsa totale, per installazione a soffitto in ambienti interni, che può essere installato su qualsiasi superficie: legno, cemento, specchio, marmo, moduli industriali con uno spessore da 5 mm a massimo 20 mm. Unica parte visibile è il foro di soli 20 mm, in grado di generare un potente fascio luminoso. Infatti la variante "Naked" mantiene tutte le prestazioni del Genius, con la parte elettrica estraibile direttamente dal foro luce, grazie alla meccanica push-pull, che facilita l'estrazione e la sostituzione della sorgente LED, senza la necessità di alcuna botola di ispezione e tantomeno di interventi invasivi in caso di manutenzione.


A BARE GENIUS SUITABLE FOR ANY SUPPORT AND MATERIAL.

Genius Naked is the evolution of the Genius family, extending the total surface integration concept to any material and context. It is a totally recessed luminaire, for ceiling-mounted indoor installation, which can be installed on any surface: wood, cement, mirror, marble, industrial modules with a thickness from 5 mm (0.2") to a maximum of 20 mm (0.79"). The only visible part is the light emission hole of only 20 mm (0.79"), capable of generating a powerful light beam. In fact, the "Naked" version retains all the performances of the Genius, with the electrical part which can be removed through the light hole, thanks to a push-pull mechanism making it easy to pull the LED light source out and replace it, with no need for any inspection hatch, nor for invasive maintenance operations.

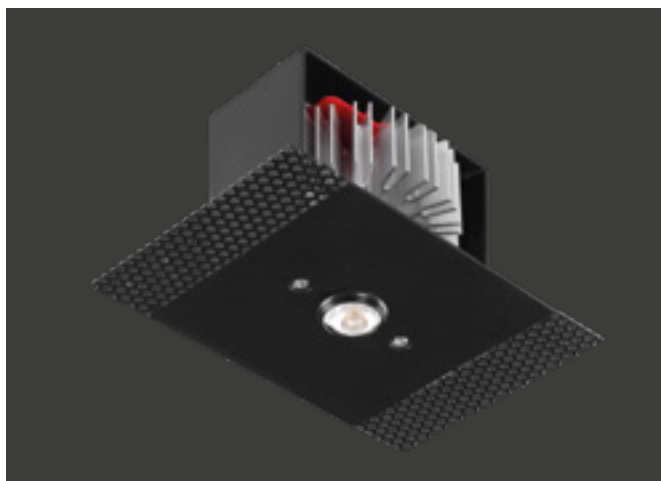

SCOMPARSA TOTALE CON QUALSIASI MATERIALE


TOTALLY CONCEALED INSTALLATION
WITH ANY MATERIAL



legno / wood



marmo / marble




specchio / mirror

il corpo illuminante viene
pre-montato sul pannello di
rivestimento

*the lighting body is pre-mounted
on the cladding panel*

installabile su materiali con
spessore da 5 a 20 mm

*it can be installed on materials with
a thickness from 5 mm (0.2")
to 20 mm (0.79")*

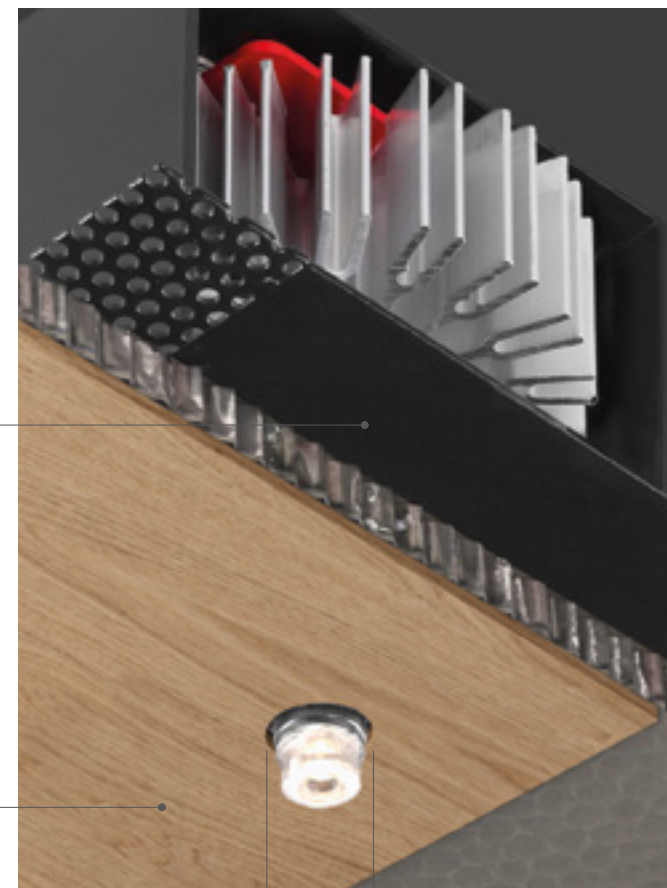


20 mm

l'unica parte visibile è il foro di soli 20 mm


*the only visible part is the emission hole
of 20 mm (0.79")*

PUSH & PULL TECHNOLOGY

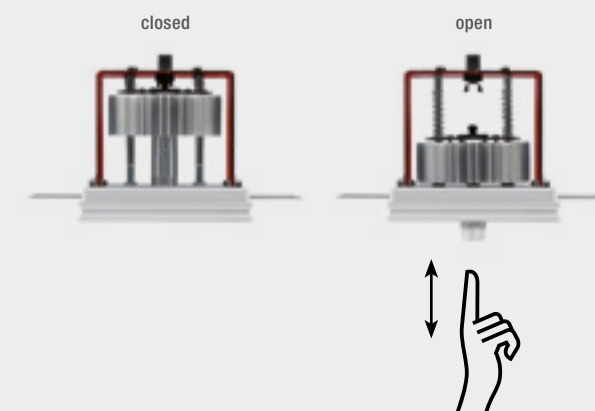

Non necessita di alcuna botola di ispezione. La parte elettrica è estraibile direttamente dal foro luce con un semplice gesto della mano, grazie alla meccanica push-pull, che facilita l'eventuale estrazione e la sostituzione della sorgente LED in caso di manutenzione.

No need for an inspection hatch. The electrical part can be extracted straight from the light hole just with a simple manual gesture, thanks to the push-pull mechanism which makes it easy to extract and replace the LED source for maintenance purposes.



CODE COMPOSITION

1061 BL 4 R 40 E _ ND	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K

1062 BL 4 R 40 E _ ND	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K

example of code composition 1061 BL 4 R 40 E 30 WD

TECHNICAL FEATURES

Code	1061 XX	1062 XX
Type	Downlight 90° 	Downlight 90° 
Material	Aluminum I Steel	Aluminum I Steel
Finishing	Black	Black
Weight	0.65 Kg	0.65 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver and inverter (included)
Lamp type	LED 700 mA  Vf: 11.5 VDC	LED 700 mA 
Lamp wattage	1 x 8.5W	1 x 8.5W
Luminous efficacy	1000 lm - 3000K	1000 lm - 3000K
Light distribution	Wide beam 40°	Wide beam 40°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Note	On request available dimmable PUSH or DALI, remote installation. Suitable for installation on surfaces max 20 mm deep. This product could be ordered with IP65 protection grade (see OUTDOOR section - code 2075).	On request available dimmable PUSH or DALI, remote installation. Suitable for installation on surfaces max 20 mm deep. This product could be ordered with IP65 protection grade (see OUTDOOR section - code 2076).

OPTIONAL ACCESSORIES

product code	optional code	description	info
1061 XX	H8700.E	Constant current electronic driver. Remote installation	Suitable for n°1 or n°3 code 1061 XX - 700 mA



Genius Naked
Chalet Sauze d'Oulx - AB2ER, Lighting And



Genius Naked
Il foyer, Piazza Teatro alla Scala – Michael Vincent Uy MVUY – Milan

TWIN GENIUS NAKED







UN GENIUS PER QUALSIASI MATERIALE.

Il design di Genius si raddoppia: Twin Genius, apparecchio da interni a scomparsa totale per installazione a soffitto, che vive ora nella sua versione "Naked", estendendo il concetto di totale integrazione superficiale a qualsiasi materiale e superficie. Dotato di due fori di emissione di soli 20 mm, l'apparecchio scompare completamente quando spento, grazie alla totale integrazione con le superfici in cui è installato: legno, cemento, specchio, marmo, moduli industriali con uno spessore da 5 mm ad un massimo di 20 mm. L'elettronica mantiene le prestazioni del Genius, con la parte elettrica estraibile direttamente dal foro luce, grazie alla meccanica push-pull, che facilita la sostituzione della sorgente LED, senza la necessità di alcuna botola di ispezione e tantomeno di interventi invasivi in caso di manutenzione.

A GENIUS FOR ANY MATERIAL.

The Genius design has been doubled: Twin Genius, a totally recessed indoor luminaire for ceiling mounting, now available in its "Naked" version, extending the total surface integration concept to any material and surface. Fitted with two light emission holes measuring only 20 mm (0.79"), the luminaire disappears completely when it is switched off, thanks to its total integration with the surfaces on which it is installed: wood, cement, mirror, marble and industrial modules with a thickness from 5 mm (0.2") to a maximum of 20 mm (0.79"). The electronics retain the performances of the Genius, with the electrical part which can be removed through the light hole, thanks to a push-pull mechanism making it easy to pull the LED light source out and replace it, so there is no need for any inspection hatch, nor for invasive maintenance operations.

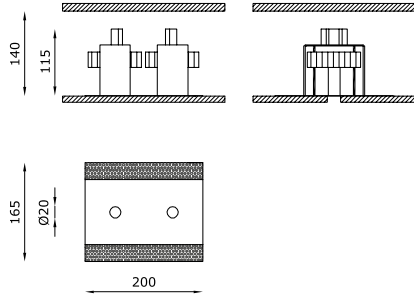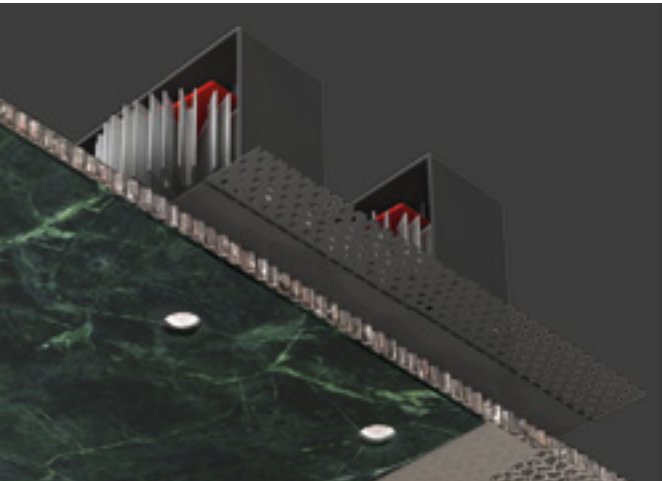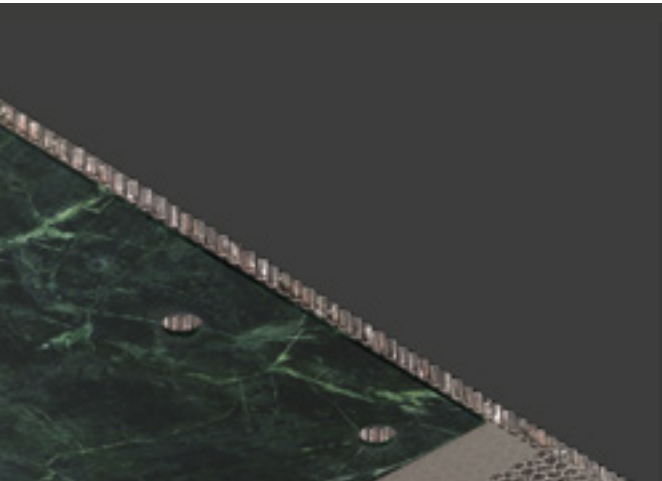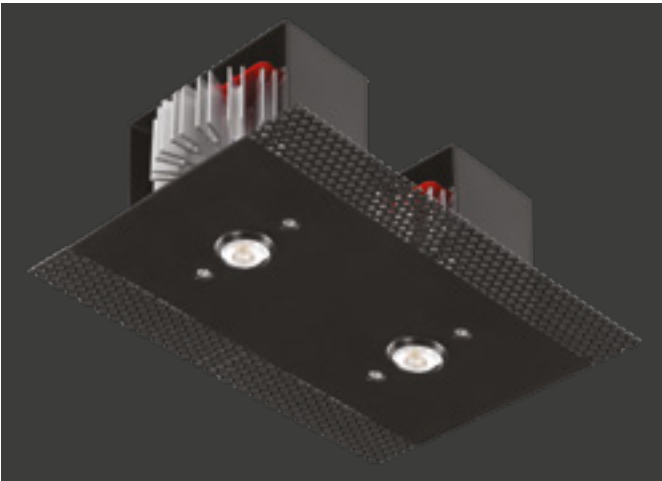

CODE COMPOSITION

1065 BL 4 R 40 E _ WD	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K
1066 BL 4 R 40 E _ ND	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K
example of code composition	1065 BL 4 R 40 E 30 WD	


TECHNICAL FEATURES

Code	1065 XX	1066 XX
Type	Downlight 90° 	Downlight 90°
Material	Aluminum I Steel	Aluminum I Steel
Finishing	Black	Black
Weight	1.3 Kg	1.3 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver and inverter (included)
Lamp type	LED 700 mA Vf: 2 x 11.5 VDC	LED 700 mA
Lamp wattage	2 x 8.5W	2 x 8.5W
Luminous efficacy	2 x 1000 lm - 3000K	2 x 1000 lm - 3000K
Light distribution	Wide beam 40°	Wide beam 40°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Note	On request available dimmable PUSH or DALI, remote installation.	On request available dimmable PUSH or DALI, remote installation.
	Suitable for installation on surfaces max 20 mm deep.	Suitable for installation on surfaces max 20 mm deep.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1065 XX	H8700.E	Constant current electronic driver. Remote installation	Suitable for n°1 code 1065 XX - 700 mA

GENIUS CONCRETE

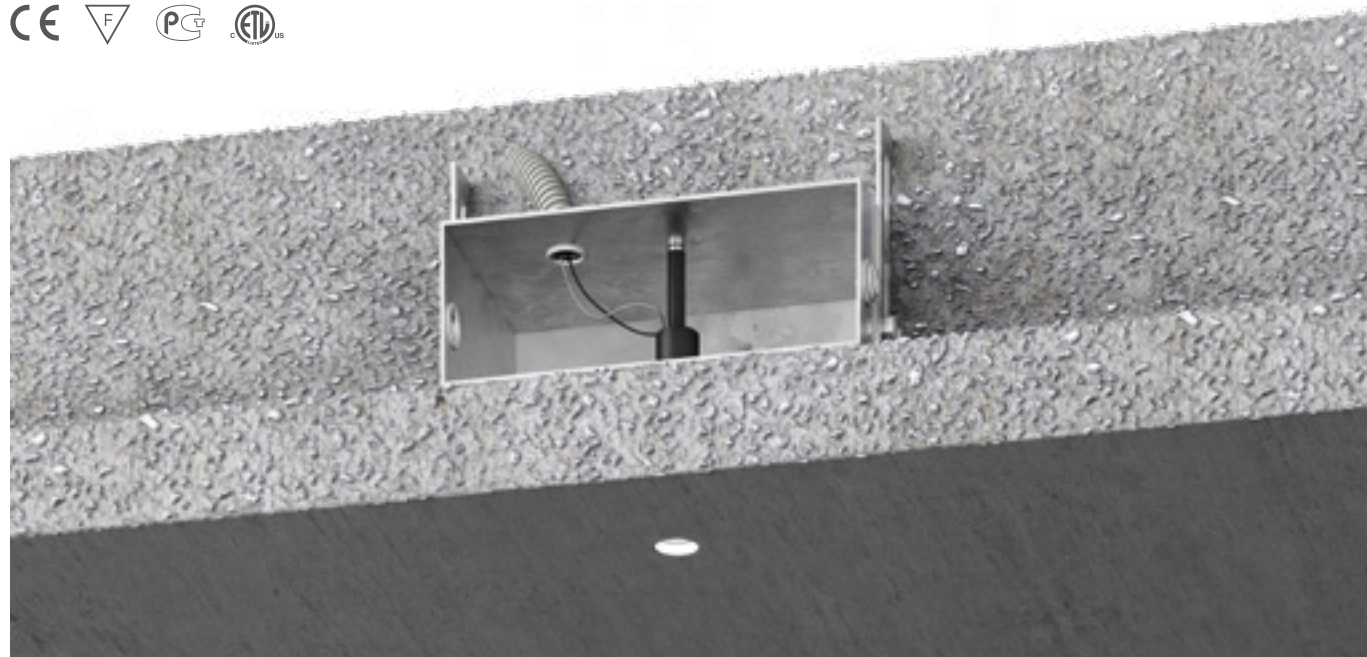

matt black

LUCE INTEGRATA NEL CEMENTO FACCIA A VISTA.

Genius Concrete è la variante più rivoluzionaria della linea Genius: un apparecchio a scomparsa totale per interni, concepito per superfici in cemento faccia-vista ed installabile durante la fase di getto del calcestruzzo.

Mantiene le prestazioni del Genius, ma ha un corpo lampada semplificato che funziona come cassaforma a perdere, con la parte elettrica estraibile direttamente dal foro luce, grazie ad un nuovo brevetto che permette l'estrazione e la sostituzione della sorgente LED. L'unica apertura visibile è il foro da 23 mm, senza la necessità di alcuna scatola di ispezione ed è installabile per getti con spessore minimo di 12 mm.

INTEGRATED LIGHT IN EXPOSED CEMENT.

Genius Concrete is the most revolutionary version of the Genius line: a totally recessed indoor luminaire, designed for exposed cement surfaces and installable during the concrete casting phase. It maintains all the performances of the Genius, but has a simplified lamp body which functions as formwork, with the electrical part removable from the light hole, thanks to a new patent which allows the LED light source to be pulled out and replaced. The only visible aperture is the 23 mm (0.90") outlet, so there is no need for any inspection hatch, and it can be installed with a minimum concrete cover of 12 mm (0.47").

INSTALLABILE DURANTE LA FASE DI GETTO DEL CALCESTRUZZO

INSTALLABLE DURING THE CONCRETE
CASTING PHASE

fissaggio con magnete

magnetic holder

scatola a perdere

disposable box

massima integrabilità con la
superficie (cemento faccia-vista)

*maximum integrability with the
surface (exposed cement)*




23 mm

l'unica parte visibile è il foro di soli 23 mm


*the only visible part is the emission hole
of 23 mm (0.9")*

INSTALLATION

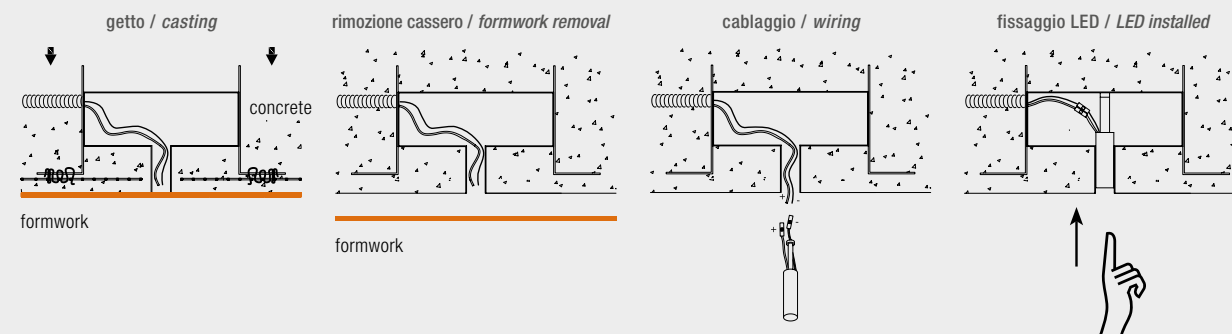

Genius Concrete è installabile durante la fase di getto del calcestruzzo. Grazie ad uno speciale meccanismo, che permette di estrarre la sorgente LED, non sono necessarie botole di ispezione per la manutenzione.

Genius Concrete can be installed during the concrete casting phase. Thanks to a special mechanism which allows the LED source to be extracted, no inspection hatches are required for maintenance purposes.



CODE COMPOSITION

1075 BL 4 R 22 E _ WD	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K
Emergency		
1076 BL 4 R 22 E _ ND	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K
example of code composition	1075 BL 4 R 22 E 30 WD	

TECHNICAL FEATURES

Code	1075 XX	1076 XX
Type	Downlight 90° 	Downlight 90° 
Material	Aluminum	Aluminum
Finishing	Black	Black
Weight	0.4 Kg	0.4 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver and inverter (included)
Cut out for plasterboard	-	-
Lamp type	LED 500 mA  Vf: 11.5 VDC	LED 500 mA 
Lamp wattage	1 x 6W	1 x 6W
Luminous efficacy	600 lm - 3000K	600 lm - 3000K
Light distribution	Beam 22°	Beam 22°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Note	On request available dimmable PUSH or DALI.	On request available dimmable PUSH or DALI.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1075 XX	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°3 code 1075 XX - 500 mA



Genius Concrete
SUPERFUTUREDESIGN®

222	X1
228	X2
234	X3
238	X4
242	Y1
246	Z1
248	M1
252	Q1

Surface

STAND ALONE

X1




PRIETTORE MINIMALE.

X1 è un apparecchio illuminante da interni, disponibile con finitura bianca, nera, rose gold e champagne e lenti intercambiabili, adatto per installazione a soffitto o a parete. Caratterizzato da un proiettore dalle alte prestazioni, dal design minimale per avere il minimo impatto visivo, dotato di braccio direzionabile e inclinabile sull'asse verticale di 360°: una luce puntuale che sa valorizzare spazi e ambienti con discrezione, linearità ed eleganza, rendendo ogni singolo dettaglio il protagonista all'interno dello spazio progettuale. Un prodotto che fa della resistenza e della precisione le sue carte vincenti.

MINIMAL PROJECTOR.

X1 is an indoor luminaire installable on ceilings or walls. It is available with white, black or rose gold or champagne finishings and interchangeable lens. Characterized by a high- performance projector realized with an essential design to obtain a minimal visual impact, it is provided by an adjustable arm which can be inclined up to 360° vertically: a punctual light able to valorize space and environment in a subtle, uniform and elegant way, making every single detail the absolute protagonist of the architectonic project. A product which is by far the best choice in fact of resistance and precision.



A

CODE COMPOSITION


1101	2	S	E	ND	<i>light colour</i>		
					27	2700K	
					30	3000K	
					40	4000K	
						<i>lens</i>	
						22	22°
						50	50°
						<i>finishing</i>	
						WH	white
						BL	black
A1						champagne	
A2						rose gold	
example of code composition						1101 WH 2 S 22 E 30 ND	

Indoor Surface stand alone

X1 (fig. A)
OmniDe Showroom
Arch. R. Oppido – London

TECHNICAL FEATURES

Code	1101 XX (fig. A)
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	0.4 Kg
Mounting	Wall and ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver on board (included)
Lamp type	LED 500 mA
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Note	On request available dimmable PUSH or DALI, remote installation. Black tige and box for X1 champagne and rose gold.



B

CODE COMPOSITION

1102	2	S	E	WD
<i>light colour</i>				
27				
30				
40				
<i>lens</i>				
22				
50				
<i>finishing</i>				
WH				
BL				
A1				
A2				
example of code composition				
1102 WH 2 S 22 E 30 WD				

TECHNICAL FEATURES

Code	1102 XX (fig. B)
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	0.4 Kg
Mounting	Wall and ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver, remote installation (not included)
Lamp type	LED 500 mA Vf: 11 VDC
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	By driver (optional)
CRI	>90
Emergency	On request
Note	On request available dimmable PUSH or DALI, remote installation. Black tige and box for X1 champagne and rose gold.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1102 XX	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°3 code 1102 XX - 500 mA
	H8500.C	Constant current electronic driver. Remote installation	Suitable for n°1 code 1102 XX - 500 mA



X1 (fig. B)
Chalet Sauze d'Oulx – AB2ER, Lighting And




X2



Un doppio proiettore per una luce che si integra perfettamente nello spazio dove viene installato: X2, apparecchio illuminante da interni, disponibile con finitura bianca, nera, oro rosa e champagne e lenti intercambiabili, per installazione a soffitto e a parete. X2 è la risposta perfetta per una luce puntuale, definita e performante. I proiettori dalle alte prestazioni e dal design minimale sono studiati per avere il minimo impatto visivo, sono dotati di braccio direzionabile e inclinabile sull'asse orizzontale e verticale di 360°, consentono un vasto potenziale scenografico.

A double projector for a light which perfectly mingles with the space it is installed in: X2, an indoor luminaire installable on ceilings or walls, is available with white, black or rose gold or champagne finishings and interchangeable lens. X2 is a punctual, definite and performing light. The high-performance projectors of minimal design are conceived for having the lowest visual effect and provided with an adjustable arm which can be inclined up to 360° both horizontally and vertically, allowing a wide range of luminescent settings.



A

CODE COMPOSITION

1202	_	2	S	_	E	_	WD		
								<i>light colour</i>	
								27	2700K
								30	3000K
								40	4000K
								<i>lens</i>	
								22	22°
								50	50°
								<i>finishing</i>	
								WH	white
BL	black								
A1	champagne								
A2	rose gold								
example of code composition								1202 WH 2 S 22 E 30 WD	

TECHNICAL FEATURES

Code	1202 XX (fig. A)
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	0.6 Kg
Mounting	Wall and ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver, remote installation (not included)
Lamp type	LED 500 mA Vf: 2 x 11 VDC
Lamp wattage	2 x 6W
Luminous efficacy	2 x 520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	By driver (optional)
CRI	>90
Emergency	On request
Note	On request available dimmable PUSH or DALI, remote installation. Black tige and box for X2 champagne and rose gold.

OPTIONAL ACCESSORIES


product code	optional code	description	info
1202 XX	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°1 code 1202 XX - 500 mA



X2 (fig. A)
Private Villa - Austria



X2 (fig. B)
SUPERFUTUREDESIGN*

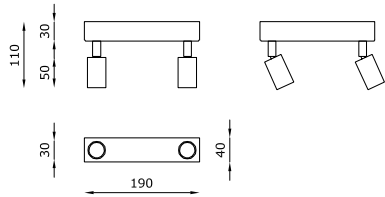

B

CODE COMPOSITION

1201	2	S	E	ND	<i>light colour</i>	
					27	2700K
					30	3000K
					40	4000K
					<i>lens</i>	
					22	22°
					50	50°
					<i>finishing</i>	
					WH	white
					BL	black
					A1	champagne
					A2	rose gold

example of code composition 1201 WH 2 S 22 E 30 ND

TECHNICAL FEATURES


Code	1201 XX (fig. B)
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	0.6 Kg
Mounting	Wall and ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver on board (included)
Lamp type	LED 500 mA
Lamp wattage	2 x 6W
Luminous efficacy	2 x 520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Note	On request available dimmable PUSH or DALI, remote installation. Black tige and box for X2 champagne and rose gold.

X3



Tre fasci di luce per tre racconti diversi, tutti accomunati dalle stesse caratteristiche vincenti: alte prestazioni, design minimale e lenti intercambiabili. X3 è un apparecchio illuminante da interni, disponibile con finitura bianca, nera, oro rosa e champagne, per installazione a soffitto o parete, perfetto per sottolineare dettagli con una luce spot discreta ma allo stesso tempo incredibilmente efficace. I proiettori sono dotati di braccio direzionabile e inclinabile di 360°.

Three different beams for three different stories which have in common the same winning characteristics: high performances, minimal design and interchangeable lens. X3 is an indoor luminaire installable on ceilings or walls and available with white, black or rose gold or champagne finishings. It is perfect for underlining details with a spot light which is discreet and incredibly efficient at the same time. The projectors are provided with an adjustable arm which can be inclined up to 360°, allowing a wide range of luminescent settings.



A

CODE COMPOSITION

1302	2	S	E	WD		
					<i>light colour</i>	
					27	2700K
					30	3000K
					40	4000K
					<i>lens</i>	
					22	22°
					50	50°
					<i>finishing</i>	
					WH	white
				BL	black	
				A1	champagne	
				A2	rose gold	

example of code composition


1302 WH 2 S 22 E 30 ND

TECHNICAL FEATURES

Code	1302 XX (fig. A)
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White I Black I Champagne I Rose Gold
Weight	1 Kg
Mounting	Wall and ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver, remote installation (not included)
Lamp type	LED 500 mA Vf: 3 x 11 VDC
Lamp wattage	3 x 6W
Luminous efficacy	3 x 520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K I 4000K (on request)
Voltage connection	By driver (optional)
CRI	>90
Emergency	On request
Note	On request available dimmable PUSH or DALI, remote installation. Black tige and box for X3 champagne and rose gold.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1302 XX	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°1 code 1302 XX - 500 mA

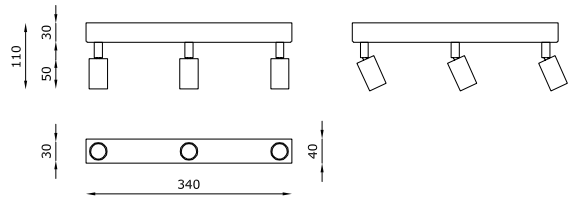

B

CODE COMPOSITION

1301	2	S	E	ND	
					<i>light colour</i>
				27	2700K
				30	3000K
				40	4000K
					<i>lens</i>
				22	22°
				50	50°
					<i>finishing</i>
				WH	white
				BL	black
				A1	champagne
				A2	rose gold


example of code composition 1301 WH 2 S 22 E 30 ND

TECHNICAL FEATURES

Code	1301 XX (fig. B)
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White I Black I Champagne I Rose Gold
Weight	1 Kg
Mounting	Wall and ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver on board (included)
Lamp type	LED 500 mA
Lamp wattage	3 x 6W
Luminous efficacy	3 x 520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K I 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Note	On request available dimmable PUSH or DALI, remote installation. Black tige and box for X3 champagne and rose gold.




X4

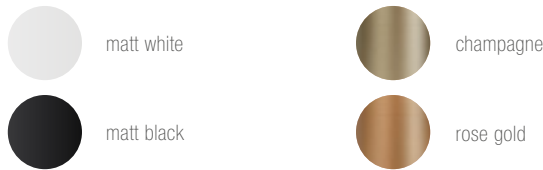

Apparecchio illuminante da interni, disponibile con finitura bianca, nera, oro rosa e champagne e lenti intercambiabili, per installazione a soffitto o parete. X4 con 4 proiettori dalle alte prestazioni e dal design minimale è studiato per avere il minimo impatto visivo. Ogni proiettore è dotato di braccio direzionabile e inclinabile di 360°, ognuno dei quali genera una luce spot scenografica dal grande impatto.

Indoor luminaire installable on ceilings or walls, available with white, black or rose gold or champagne finishings and interchangeable lens. X4 is provided with four high- performance projectors created with a minimal design in order to obtain the lowest visual impact. Each projector has an adjustable arm which can be inclined up to 360°, producing a scenographic spot light of great effect.

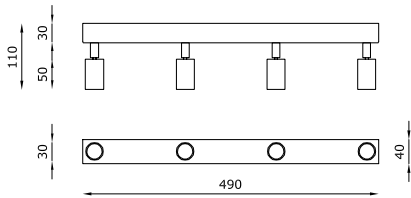

CODE COMPOSITION


1401	2	S	E	ND	<i>light colour</i>	
					27	2700K
					30	3000K
					40	4000K
					<i>lens</i>	
example of code composition					22	22°
					50	50°
					<i>finishing</i>	
					WH	white
					BL	black
					A1	champagne
					A2	rose gold

TECHNICAL FEATURES

Code	1401 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	1.3 Kg
Mounting	Wall and ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver on board (included)
Lamp type	LED 500 mA
Lamp wattage	4 x 6W
Luminous efficacy	4 x 520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Note	On request available dimmable PUSH or DALI, remote installation. Black tige and box for X4 champagne and rose gold.



Y1

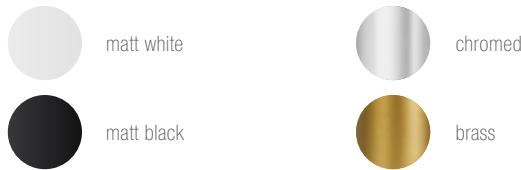

Y1 è un proiettore cilindrico per ambienti interni, adatto per installazioni a soffitto o parete, con dimensioni molto ridotte per un minimo impatto visivo della sorgente.


Ha finitura di serie bianca, nera opaca, brass e cromo e lenti intercambiabili.

Y1 è dotato di un sistema di braccio orientabile a 360°, dagli snodi invisibili. Ha un output luminoso in grado di valorizzare gli ambienti con linearità ed eleganza e, grazie alla sorgente retrocessa, garantisce la riduzione dell'abbagliamento, per il massimo comfort visivo.


Y1 is a cylindrical projector for indoor environments, suitable for ceiling or wall installations, with small dimensions for minimum visual impact of the light source.

It is produced with a white, black or brass and chromed finishings with interchangeable optics.

Y1 is fitted with a 360 degrees-adjustable arm system, with invisible joints. Its light output can valorise environments with linearity and elegance and, thanks to the recessed light source it reduces the glaring effect, for maximum visual comfort.



A



B

CODE COMPOSITION

1111	_	4	S	_	E	_	ND		
								light colour	
								27	2700K
								30	3000K
								40	4000K
								lens	
								22	22°
								50	50°
								finishing	
								WH	white
1112	_	4	S	_	E	_	WD		
								light colour	
								27	2700K
								30	3000K
								40	4000K
								lens	
								22	22°
								50	50°
								finishing	
								WH	white
								BL	black
								CP	chromed
								BR	brass

example of code composition 1111 WH 4 S 22 E 30 ND

TECHNICAL FEATURES

Code	1111 XX (fig. A)	1112 XX (fig. B)
Type	Projector ± 360° / ± 90° 	Projector ± 360° / ± 90°
Material	Aluminum	Aluminum
Finishing	White I Black Chromed I Brass	White I Black Chromed I Brass
Weight	0.4 Kg	0.4 Kg
Mounting	Wall and ceiling	Wall and ceiling
IP rating	IP40	IP40
Insulation class	III	III
Control gear	Constant current electronic driver on board (included)	Constant current electronic driver, remote installation (not included)
Lamp type	LED 700 mA 	LED 700 mA Vf: 11.5 VDC
Lamp wattage	1 x 8W	1 x 8W
Luminous efficacy	800 lm - 3000K	800 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)	Beam 22° Beam 50° (on request)
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
Voltage connection	220-240V · 50/60Hz	By driver (optional)
CRI	>90	>90
Emergency	On request	On request
Note	On request available dimmable PUSH or DALI, remote installation.	On request available dimmable PUSH or DALI, remote installation.
	Black tige and driver box for Y1 chromed and brass.	Black tige and box for Y1 chromed and brass.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1112 XX	H8700.E	Constant current electronic driver. Remote installation	Suitable for n°1, n°2 or n°3 code 1112 XX - 700 mA



Y1
Private Villa - Austria

Z1




Z1 è un apparecchio per ambienti interni, adatto per installazioni a soffitto o parete e caratterizzato da un proiettore miniaturizzato di soli 23 mm di diametro, completamente direzionabile sugli assi verticale ed orizzontale, per un orientamento a 360°.

Ha finitura di serie bianca o nera. Z1 è un prodotto che garantisce alte prestazioni con il minimo impatto visivo grazie ai suoi snodi invisibili.


Z1 is a luminaire for indoor use, suitable for ceiling or wall installations and characterised by a miniaturised projector with a diameter of only 23 mm (0.90"), completely 360 degree-adjustable over its vertical and horizontal axes.

It is produced with a white or opaque black finish. Z1 is a product which guarantees high performances with minimum visual impact thanks to its invisible joints.

Indoor Surface stand alone



A



B

CODE COMPOSITION

1121	_	4	S	_	E	ND	
							light colour
							27 2700K
							30 3000K
							40 4000K
1122	_	4	S	_	E	WD	lens
							22 22°
							50 50°
							finishing
							WH white
1121	_	4	S	_	E	ND	BL black
							light colour
							27 2700K
							30 3000K
							40 4000K
1122	_	4	S	_	E	WD	lens
							22 22°
							50 50°
							finishing
							WH white
1121	_	4	S	_	E	ND	BL black

example of code composition 1121 WH 4 S 22 E 30 ND

TECHNICAL FEATURES

Code	1121 XX (fig. A)	1122 XX (fig. B)
Type	Projector ± 360° / ± 90° 	Projector ± 360° / ± 90°
Material	Aluminum	Aluminum
Finishing	White I Black	White I Black
Weight	0.4 Kg	0.4 Kg
Mounting	Wall and ceiling	Wall and ceiling
IP rating	IP40	IP40
Insulation class	III	III
Control gear	Constant current electronic driver on board (included)	Constant current electronic driver, remote installation (not included)
Lamp type	LED 500 mA 	LED 500 mA Vf: 11 VDC
Lamp wattage	1x 6W	1 x 6W
Luminous efficacy	520 lm - 3000K	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)	Beam 22° Beam 50° (on request)
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
Voltage connection	220-240V · 50/60Hz	By driver (optional)
CRI	>90	>90
Emergency	On request	On request
Note	On request available dimmable PUSH or DALI, remote installation.	On request available dimmable PUSH or DALI, remote installation.

OPTIONAL ACCESSORIES


product code	optional code	description	info
1122 XX	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°1, n°2 or n°3 code 1122 XX - 500 mA

M1



M1 è una sospensione per interni, installabile a soffitto: è composta da un'asta che conduce la luce in modo diretto e puntuale, e un proiettore completamente direzionabile a 360°, che permette di dirigere la luce verso singoli dettagli dello spazio. Una sospensione dal design minimale con luce spot, disponibile con ottiche differenti. Per il modello installabile a soffitto, è possibile scegliere la versione con cassetta contenente il driver oppure con cassetta minimale ribassata con driver da posizionare remoto.

M1 is a suspended indoor luminaire installable on ceiling: it is composed by a pole which scatters light in a direct and punctual manner. It is also provided by a projector adjustable up to 360°, which allows to redirect the luminescent beam towards the single details within the space. A suspended lamp of minimal design and emanating a spot light, available with different lens. For the model installable on ceilings, it is possible to choose between two versions: one with a case including the driver and one with a minimal lowered case with remote driver installation.

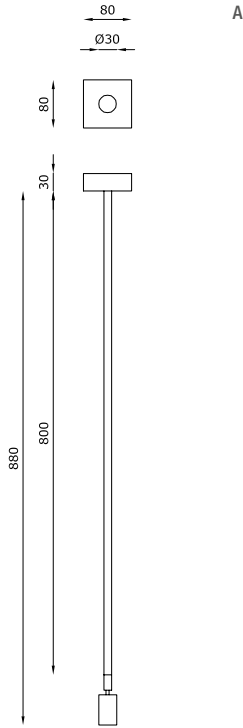

CODE COMPOSITION


1501	_	2	S	_	E	_	ND		
								<i>light colour</i>	
								27	2700K
								30	3000K
								40	4000K
								<i>lens</i>	
								22	22°
								50	50°
								<i>finishing</i>	
								WH	white
								BL	black

example of code composition 1501 BL 2 S 22 E 30 ND

TECHNICAL FEATURES

Code	1501 XX (fig. A)
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White I Black
Weight	0.75 Kg
Mounting	Ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver on board (included)
Lamp type	LED 500 mA
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K I 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Note	On request available dimmable PUSH or DALI, remote installation.

Indoor Surface stand alone

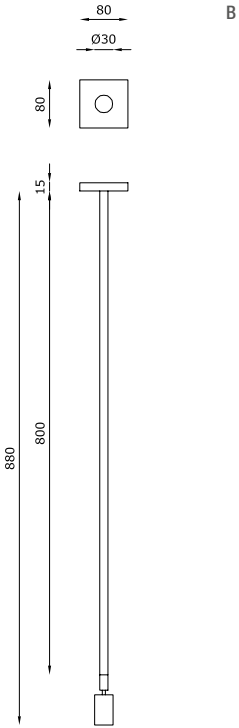

CODE COMPOSITION

1502 _ 2 S _ E _ WD		
		light colour
27	2700K	
30	3000K	
40	4000K	
		lens
22	22°	
50	50°	
		finishing
WH	white	
BL	black	

example of code composition 1502 BL 2 S 22 E 30 WD

TECHNICAL FEATURES

Code	1502 XX (fig. B)
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White I Black
Weight	0.75 Kg
Mounting	Ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver, remote installation (not included)
Cut out for plasterboard	-
Lamp type	LED 500 mA Vf: 11 VDC
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K I 4000K (on request)
Voltage connection	220-240V - 50/60Hz
CRI	>90
Emergency	On request
Note	On request available dimmable PUSH or DALI, remote installation.


OPTIONAL ACCESSORIES

product code	optional code	description	info
1502 XX	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°3 code 1502 XX - 500 mA
	H8500.C	Constant current electronic driver. Remote installation	Suitable for n°1 code 1502 XX - 500 mA



M1 custom version
Concept - Fedorova Architects - Russia

Q1



CODE COMPOSITION

1012	3	S	E	ND	
					light colour
				27	2700K
				30	3000K
				40	4000K
					lens
				12	12°
				24	24°
				38	38°
					finishing
				WH	white
				BL	black

example of code composition 1012 WH 3 S 24 E 30 ND

TECHNICAL FEATURES

Code	1012 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black
Weight	0.8 Kg
Mounting	Wall and ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver on board (included)
Lamp type	LED 350 mA
Lamp wattage	1 x 12W
Luminous efficacy	1550 lm - 3000K
Light distribution	Beam 24° Beam 12° 38° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Note	On request available dimmable PUSH or DALI.

ALTA POTENZA CON DRIVER INCLUSO.

Proiettore ad alte performance in metallo verniciato a polvere: Q1 è un apparecchio per interni adatto per installazione a soffitto e a parete. Garantisce il minimo impatto visivo, è completamente orientabile a 360° in orizzontale e in verticale e disponibile in più varianti ottiche.

HIGH POWER WITH DRIVER INCLUDED.

A high-performance, metallic dust-painted projector: Q1 is an indoor luminaire installable on ceilings, walls. It guarantees a minimal visual impact and is completely orientable up to 360° both horizontally and vertically. It is also available with different lens.



Q1
Private Villa - Austria

258	The Tube
262	The Dark
266	Mikado

Suspended

STAND ALONE

THE TUBE




-  matt white
-  matt black
-  chromed
-  champagne
-  rose gold

The Tube è una lampada a sospensione dal design minimale, il suo diametro di soli 15 mm la rendono estremamente essenziale, discreta, elegante nelle forme. Ha un output luminoso in grado di valorizzare ogni dettaglio, disponibile in diverse colorazioni. È disponibile una versione con driver incluso nel rosone e una versione con rosone a scomparsa in battuta con driver remoto.

The Tube is a pendant light with a minimal design. Its diameter of only 15 mm makes it extremely clean-cut, discrete and elegant in shape. It has a light output that can enhance every detail and is available in different colours. It is available in a version with driver included in the ceiling-rose and a version with recessed ceiling-rose with remote driver.



Indoor Suspended stand alone

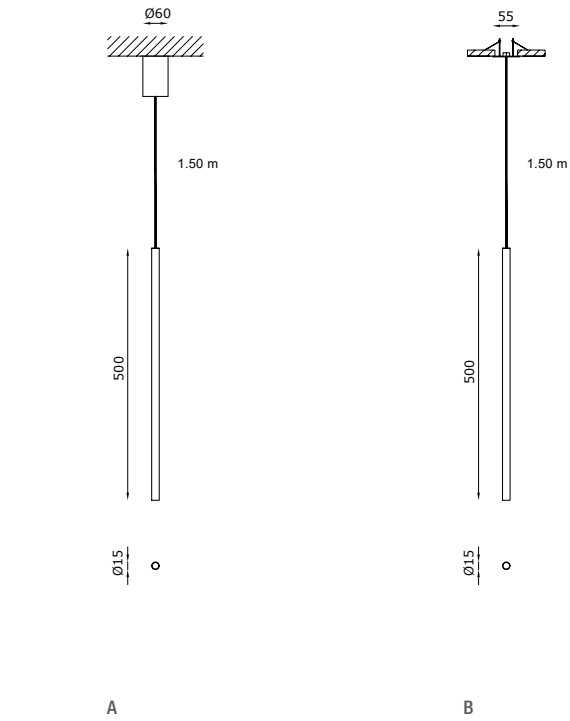

CODE COMPOSITION

1131	4 S 00 E ND		
		<i>light colour</i>	
		27	2700K
		30	3000K
		<i>finishing</i>	
		WH	white
		BL	black
		CP	chromed
		A1	champagne
A2	rose gold		

1132	4 S 00 E ND		
		<i>light colour</i>	
		27	2700K
		30	3000K
		<i>finishing</i>	
		WH	white
		BL	black
		CP	chromed
		A1	champagne
A2	rose gold		

example of code composition


1131 WH 4 S 00 E 27 ND

TECHNICAL FEATURES

Code	1131 XX (fig. A)	1132 XX (fig. B)
Type	Suspension lamp 	Suspension lamp 
Material	Aluminum	Aluminum
Finishing	White Black Champagne Rose Gold	White Black Champagne Rose Gold
Weight	0.8 Kg	0.8 Kg
Mounting	Ceiling mounting	Ceiling mounting
IP rating	IP40	IP40
Insulation class	III	III
Control gear	Electronic driver on board (included)	Electronic driver, remote installation (included)
Cut out for plasterboard	-	Ø 45 mm
Lamp type	LED 	LED 
Lamp wattage	1 x 4.5W	1 x 4.5W
Luminous efficacy	360 lm - 3000K	360 lm - 3000K
Light distribution	Narrow beam	Narrow beam
Fitting	-	-
Light colour	White 3000K White 2700K (on request)	White 3000K White 2700K (on request)
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	-
Note	Black ceiling box with driver on board. Black silicone cable (L 1.5 m). On request different lenght.	Black recessed canopy with remote driver. Black silicone cable (L 1.5 m). On request different lenght.



THE DARK

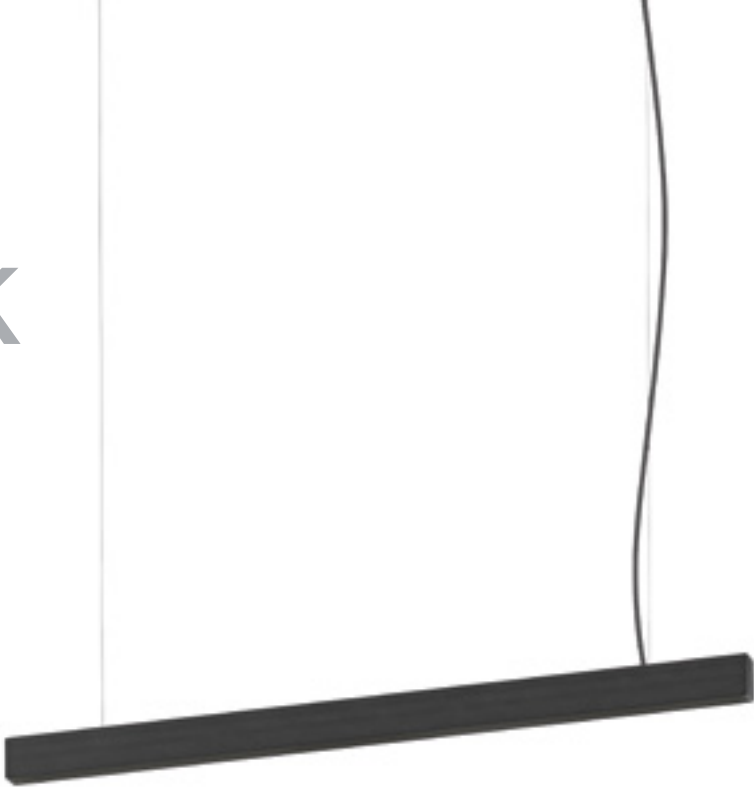

matt black



SCHERMO FUMÈ PER UN LOOK TOTAL BLACK QUANDO È SPENTO.

The Dark è una lampada a sospensione lineare per ambienti interni. Il suo design ne enfatizza il nome proponendosi per essere un punto luce **completamente nero grazie alla presenza di uno schermo fumè**, che mette in evidenza la sua capacità luminosa solo quando è acceso. Disponibile anche con schermo satinato. È una lampada dalla forma essenziale e minimale che crea una luce diffusa e omogenea nello spazio. È disponibile una versione con driver incluso nel rosone e una versione con rosone a scomparsa in battuta con driver remoto.

FUMÈ SHADE FOR A TOTAL BLACK LOOK WHEN TURNED OFF.

*The Dark is a linear pendant light for interiors. Its design epitomises its name proposing itself as a **completely black light point thanks to a smoked shade** which shows off its light capacity only when it is switched on. Also available with satin-finished shade. It is a light with a clean-cut minimal shape which creates a diffused and homogeneous light in the space. It is available in a version with driver included in the ceiling-rose and a version with recessed ceiling-rose with remote driver.*

Indoor Suspended stand alone

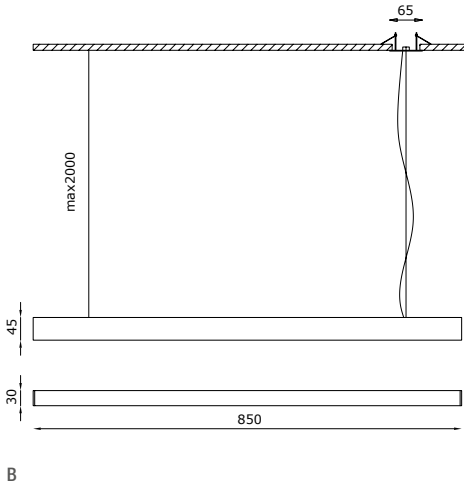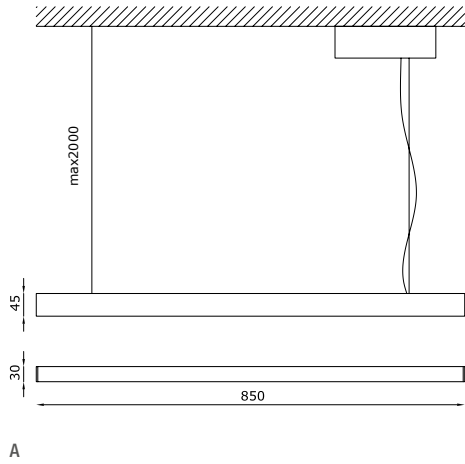

CODE COMPOSITION

1140 BL 4 S 00 E _ ND

light colour	
27	2700K
30	3000K
40	4000K

1141 BL 4 S 00 E _ ND

light colour	
27	2700K
30	3000K
40	4000K

example of code composition 1140 BL 4 S 00 E **30** ND

TECHNICAL FEATURES

Code	1140 XX (fig. A)	1141 XX (fig. B)
Type	Suspension lamp	Suspension lamp
Material	Aluminum	Aluminum
Finishing	Black	Black
Weight	2 Kg	2 Kg
Mounting	Ceiling mounting	Ceiling mounting
IP rating	IP40	IP40
Insulation class	III	III
Control gear	Constant voltage LED driver on board (included)	Constant voltage LED driver, remote installation (included)
Cut out for plasterboard	-	Ø 55 mm
Lamp type	LED	LED
Lamp wattage	1 x 25W	1 x 25W
Luminous efficacy	1800 lm	1800 lm
Light distribution	Opal diffused screen fumè	Opal diffused screen fumè
Fitting	-	-
Light colour	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	-
Note	Black ceiling box with driver on board. Black silicone cable (L max 2 m).	Black recessed canopy with remote driver. Black silicone cable (L max 2 m).

OPTIONAL ACCESSORIES

product code	optional code	description	info
1140 XX / 1141 XX	VTR0000019	Opal white diffused screen	-



The Dark
SUPERFUTUREDESIGN®

MIKADO




ALTA POTENZA DI LUCE IN 17 mm DI DIAMETRO.

Mikado è una lampada tubolare a sospensione, dal design minimale per ambienti interni. Il suo diametro di soli 17 mm la rendono estremamente discreta nelle forme. Nonostante le sue ridotte dimensioni è una lampada in grado di emettere quasi 5000 lm, in soli 1.5 m di lunghezza. È disponibile una versione con driver incluso nel rosone e una versione con rosone a scomparsa in battuta con driver remoto.


HIGH POWER OF LIGHT IN A DIAMETER OF 17 mm.

Mikado is a tubular pendant light with a minimal design for interiors. Its diameter is only 17 mm making it extremely discrete. In spite of its small size, it is a light which can emit almost 5000 lm, with a length of only 1.5 m. It is available in a version with driver included in the ceiling-rose and a version with recessed ceiling-rose with remote driver.

Indoor Suspended stand alone

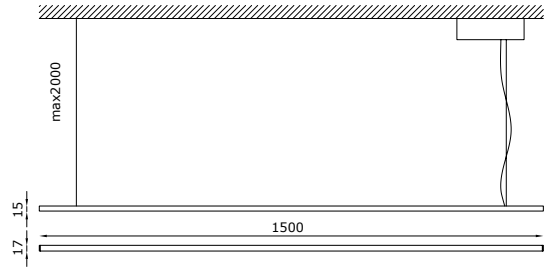

A

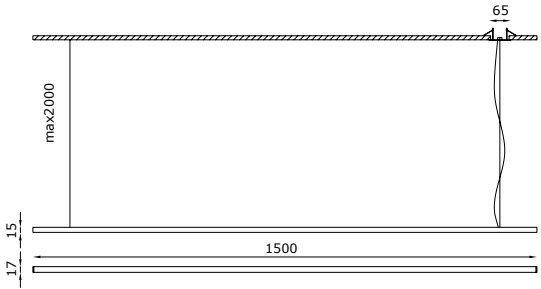

B

CODE COMPOSITION

1135 BL 4 S 00 E _ ND	light colour	
	27	2700K
	30	3000K
	40	4000K
1136 BL 4 S 00 E _ ND	light colour	
	27	2700K
	30	3000K
	40	4000K
example of code composition	1135 BL 4 S 00 E 30 ND	

TECHNICAL FEATURES

Code	1135 XX (fig. A)	1136 XX (fig. B)
Type	Suspension lamp 	Suspension lamp
Material	Aluminum	Aluminum
Finishing	Black	Black
Weight	1.5 Kg	1.5 Kg
Mounting	Ceiling mounting	Ceiling mounting
IP rating	IP40	IP40
Insulation class	III	III
Control gear	Constant voltage LED driver on board (included)	Constant voltage LED driver, remote installation (included)
Cut out for plasterboard	-	Ø 55 mm
Lamp type	LED 	LED
Lamp wattage	1 x 30W	1 x 30W
Luminous efficacy	3200 lm - 3000K	3200 lm - 3000K
Light distribution	Opal diffused screen satin	Opal diffused screen satin
Fitting	-	-
Light colour	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	-
Note	Black ceiling box with driver on board. Black silicone cable (L max 2 m).	Black recessed canopy with remote driver. Black silicone cable (L max 2 m).



Mikado
SUPERFUTUREDESIGN®

Outdoor



Outdoor stand alone Outdoor stand alone Outdoor stand alone Outdoor stand alone

276	Genius Basic Naked IP65
282	Genius Concrete IP65
278	Genius Naked IP65
280	Genius Naked Dim To Warm IP65
284	F40
288	H2NOT
292	H2STOP

Recessed

STAND ALONE

GENIUS BASIC NAKED IP65







IL PIÙ COMPATTO DA INSTALLARE SU QUALSIASI MATERIALE.

La versione da esterni di Genius Basic Naked vive ora in Genius Basic Naked IP65. Questo apparecchio da incasso a scomparsa totale per esterni, è ingegnerizzato per raggiungere un grado di protezione IP65. Essendo una variante della versione Naked, questo prodotto estende il concetto di totale integrazione superficiale a qualsiasi materiale e contesto ed inoltre aggiunge le potenzialità tipiche della linea Basic. Genius Basic Naked IP65 è un prodotto molto compatto, sintesi della ricerca Buzzi & Buzzi in termini di versatilità, efficienza ed affidabilità: flusso luminoso da 540 lm, installabile in soli 80 mm di intercapedine, con protezione IP65. Può essere installato su qualsiasi superficie: legno, cemento, specchio, marmo, moduli industriali con spessore da 12 mm a 30 mm. Tipicamente Genius, unica parte visibile è il foro luce di 20 mm, da cui è estraibile la sorgente LED grazie a un sistema che facilita la sostituzione del corpo illuminante, senza necessità di alcuna botola di ispezione e tantomeno di interventi invasivi in caso di manutenzione.

THE MOST COMPACT TO INSTALL ON ANY MATERIAL.

The outdoors version of Genius Basic Naked is now available in the Basic Naked IP65 model. This totally recessed luminaire for outdoor use has been engineered to achieve an IP65 protection level. Since it is a new version of the Naked model, this product extends the concept of total surface integration to any material and contexts and also achieves the potentials typical of the Basic line. Genius Basic Naked IP65 is a very compact product, a synthesis of Buzzi & Buzzi research in terms of versatility, efficiency and reliability: a light flow of 540 lm, installable in a cavity of only 80 mm (3.15"), with IP65 protection. It can also be installed on wood, cement, mirror, marble and industrial modules with a thickness of from 12 mm (0.47") to a maximum of 30 mm (1.18"). Typically Genius, the only visible part is the light emission hole measuring 20 mm (0.79"), from which the LED light source can be pulled out thanks to a system which makes it easy to replace the light source, so there is no need for any inspection hatch, nor for invasive maintenance.

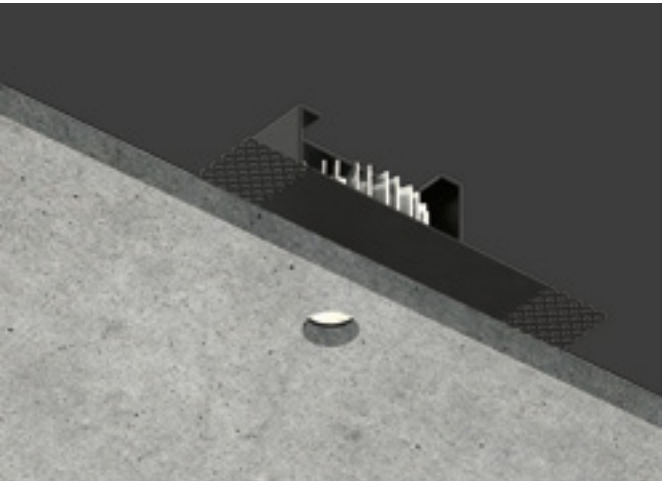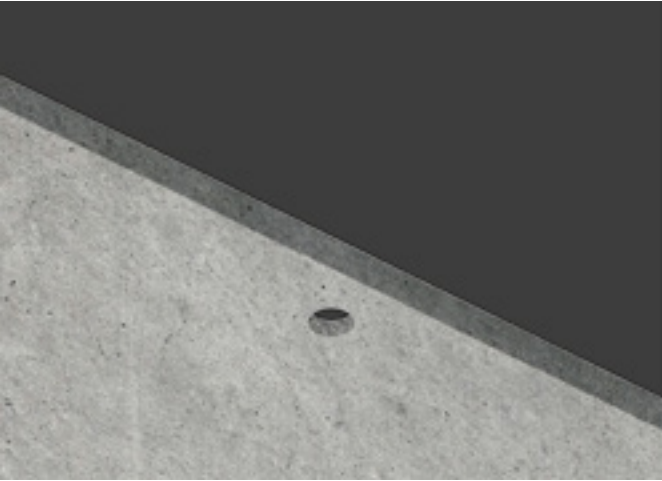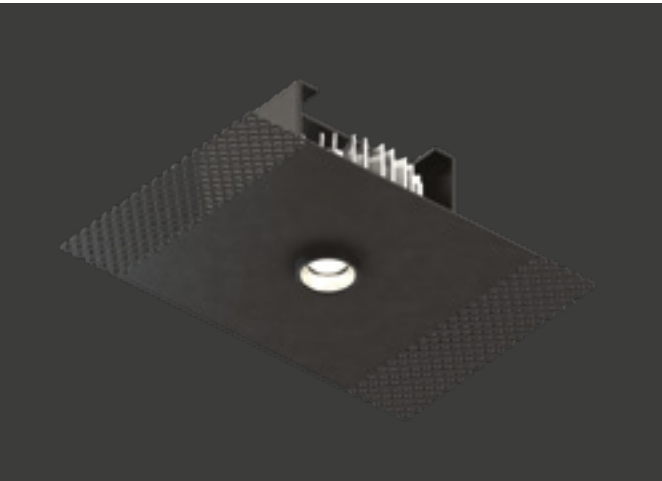

CODE COMPOSITION

2071 BL 4 R 24 E _ WD	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K
Emergency		
2072 BL 4 R 24 E _ ND	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K
example of code composition		
2071 BL 4 R 24 E 30 WD		

TECHNICAL FEATURES

Code	2071 XX	2072 XX
Type	Downlight 90° 	Downlight 90° 
Material	Aluminum I Steel	Aluminum I Steel
Finishing	Black	Black
Weight	0.65 Kg	0.65 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP65	IP65
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver and inverter (included)
Lamp type	LED 700 mA  Vf: 6.5 VDC	LED 700 mA 
Lamp wattage	1 x 4.5W	1 x 4.5W
Luminous efficacy	540 lm - 3000K	540 lm - 3000K
Light distribution	Wide beam 24°	Wide beam 24°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Note	On request available dimmable PUSH or DALI, remote installation.	On request available dimmable PUSH or DALI, remote installation.
	Suitable for installation on surfaces max 30 mm deep.	Suitable for installation on surfaces max 30 mm deep.

OPTIONAL ACCESSORIES

product code	optional code	description	info
2071 XX	H8700.E	Constant current electronic driver. Remote installation	Suitable for n°3 code 2071 XX - 700 mA

GENIUS NAKED IP65







UN GENIUS NUDO ADATTO PER QUALSIASI SUPPORTO E MATERIALE.

Genius Naked IP65 è un apparecchio a scomparsa totale a soffitto, adatto per esterni e ambienti molto umidi, grazie all'alto grado di protezione IP65. Questo prodotto estende il concetto di totale integrazione superficiale, tipico di Buzzi & Buzzi, a qualsiasi materiale e contesto: infatti può essere installato su qualsiasi superficie: legno, cemento, specchio, marmo, moduli industriali con uno spessore da 12 mm a massimo 20 mm. Unica parte visibile è il foro di soli 20 mm, mentre la parte elettrica è estraibile direttamente dal foro luce, grazie alla meccanica push-pull, che facilita la sostituzione della sorgente LED, senza la necessità di alcuna botola di ispezione e tantomeno di interventi invasivi in caso di manutenzione.

A BARE GENIUS SUITABLE FOR ANY SUPPORT AND MATERIAL.

Genius Naked IP65 is a totally recessed ceiling-mounted luminaire, suitable for use outdoors and in very damp environments, thanks to its high IP65 protection level. This product extends the concept of total surface integration, typical of Buzzi & Buzzi, to any material and context: in fact, it can also be installed on wood, cement, mirror, marble and industrial modules with a thickness of from 12 mm (0.47") to a maximum of 20 mm (0.79"). The only visible part is the light emission hole measuring only 20 mm (0.79"), while the electrical part can be removed through the light hole, thanks to a push-pull mechanism making it easy to pull the LED light source out, with no need for any inspection hatch, nor for invasive maintenance operations.

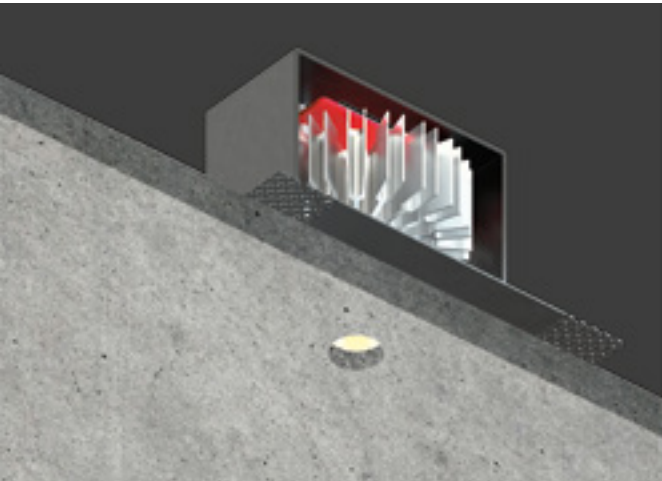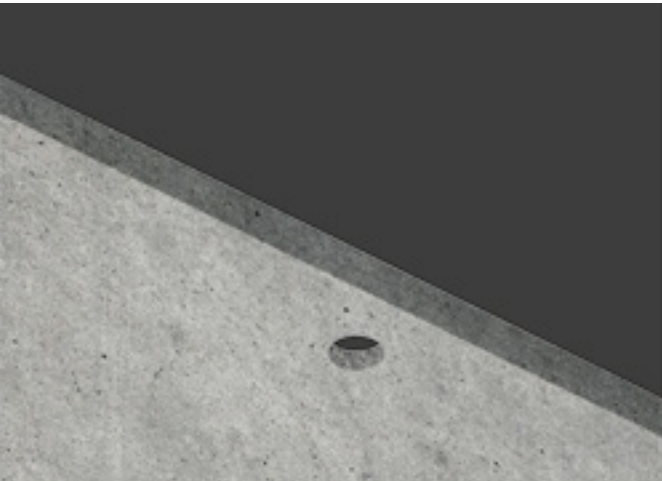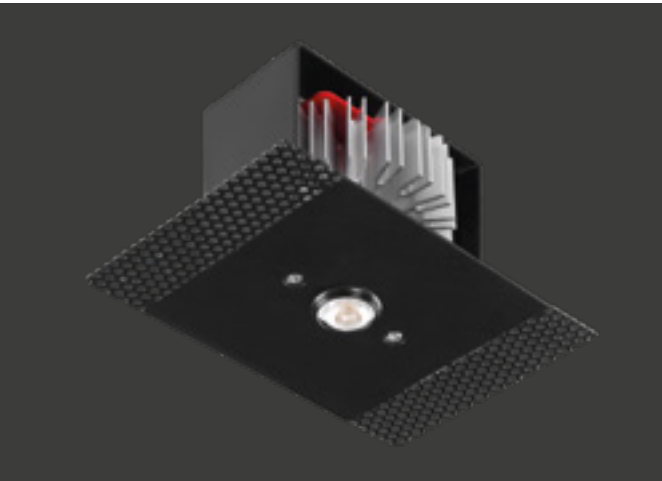

CODE COMPOSITION

2075 BL 4 R 40 E _ WD	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K
Emergency		
2076 BL 4 R 40 E _ ND	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K

example of code composition 2075 BL 4 R 40 E **30** WD

TECHNICAL FEATURES

Code	2075 XX	2076 XX
Type	Downlight 90° 	Downlight 90°
Material	Aluminum I Steel	Aluminum I Steel
Finishing	Black	Black
Weight	0.65 Kg	0.65 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP65	IP65
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver and inverter (included)
Lamp type	LED 700 mA Vf: 11.5 VDC	LED 700 mA
Lamp wattage	1 x 8.5W	1 x 8.5W
Luminous efficacy	1000 lm - 3000K	1000 lm - 3000K
Light distribution	Wide beam 40°	Wide beam 40°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Note	On request available dimmable PUSH or DALI, remote installation.	On request available dimmable PUSH or DALI, remote installation.
	Suitable for installation on surfaces max 20 mm deep.	Suitable for installation on surfaces max 20 mm deep.

OPTIONAL ACCESSORIES

product code	optional code	description	info
2075 XX	H8700.E	Constant current electronic driver. Remote installation	Suitable for n°1 or n°3 code 2075 XX - 700 mA

GENIUS NAKED DIM TO WARM IP65







UN GENIUS NUDO ADATTO PER QUALSIASI SUPPORTO E MATERIALE.

Genius Naked Dim To Warm IP65 è un apparecchio a scomparsa totale a soffitto, adatto per esterni e ambienti molto umidi, grazie all'alto grado di protezione IP65. Questo prodotto estende il concetto di totale integrazione superficiale, tipico di Buzzi & Buzzi, a qualsiasi materiale e contesto: infatti può essere installato su qualsiasi superficie: legno, cemento, specchio, marmo, moduli industriali con uno spessore da 12 mm a massimo 20 mm. Unica parte visibile è il foro di soli 20 mm, mentre la parte elettrica è estraibile direttamente dal foro luce, grazie alla meccanica push-pull, che facilita la sostituzione della sorgente LED, senza la necessità di alcuna botola di ispezione e tantomeno di interventi invasivi in caso di manutenzione.

A BARE GENIUS SUITABLE FOR ANY SUPPORT AND MATERIAL.

Genius Naked Dim To Warm IP65 is a totally recessed ceiling-mounted luminaire, suitable for use outdoors and in very damp environments, thanks to its high IP65 protection level. This product extends the concept of total surface integration, typical of Buzzi & Buzzi, to any material and context: in fact, it can also be installed on wood, cement, mirror, marble and industrial modules with a thickness of from 12 mm (0.47") to a maximum of 20 mm (0.79"). The only visible part is the light emission hole measuring only 20 mm (0.79"), while the electrical part can be removed through the light hole, thanks to a push-pull mechanism making it easy to pull the LED light source out, with no need for any inspection hatch, nor for invasive maintenance operations.

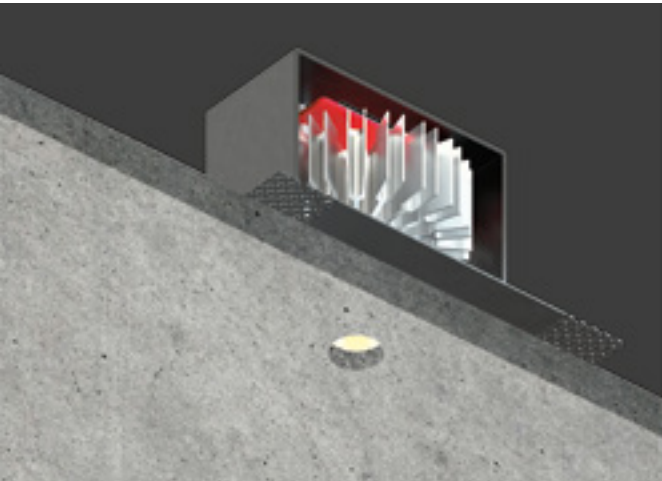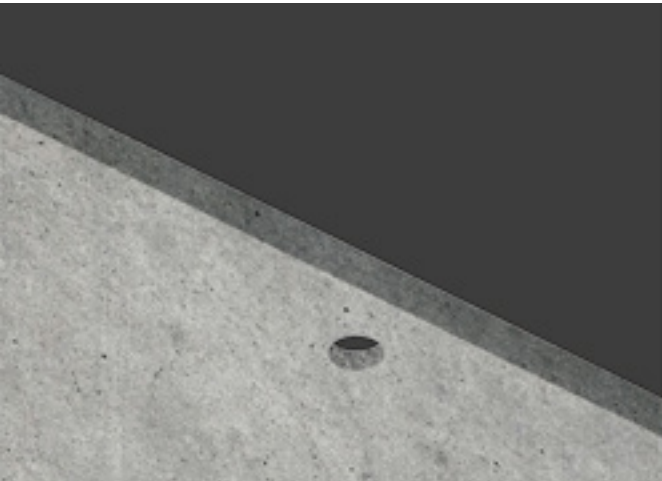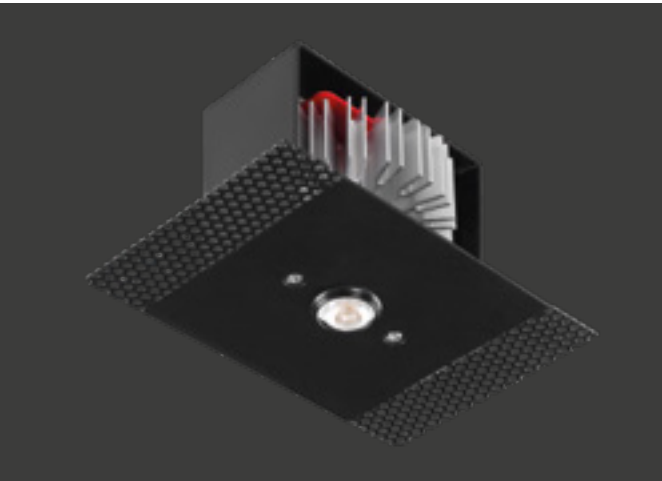

CODE COMPOSITION

2077 BL 7 R 40 E 98 WD

Outdoor Recessed stand alone


TECHNICAL FEATURES

Code	2077 XX
Type	Downlight 90° 
Material	Aluminum I Steel
Finishing	Black
Weight	0.65 Kg
Mounting	Ceiling recessed
IP rating	IP65
Insulation class	III
Control gear	Remote constant current electronic driver ** (not included)
Lamp type	LED 350 mA Vf: 17 VDC
Lamp wattage	1 x 6W
Luminous efficacy	600lm (from 1800K up to 3000K)
Light distribution	Wide beam 40°
Fitting	-
Light colour	Dimming range 1800K-3000K
Light hole	Ø 20 mm
Voltage connection	By driver (optional)
CRI	>90
Emergency	-
Note	On request available dimmable PUSH or DALI, remote installation.

Suitable for installation on surfaces max 20 mm deep.

** Genius Dim to Warm requires dimming: amplitude (AM)
IEEE1789-2015 dim to warm wide range input voltage

GENIUS CONCRETE IP65

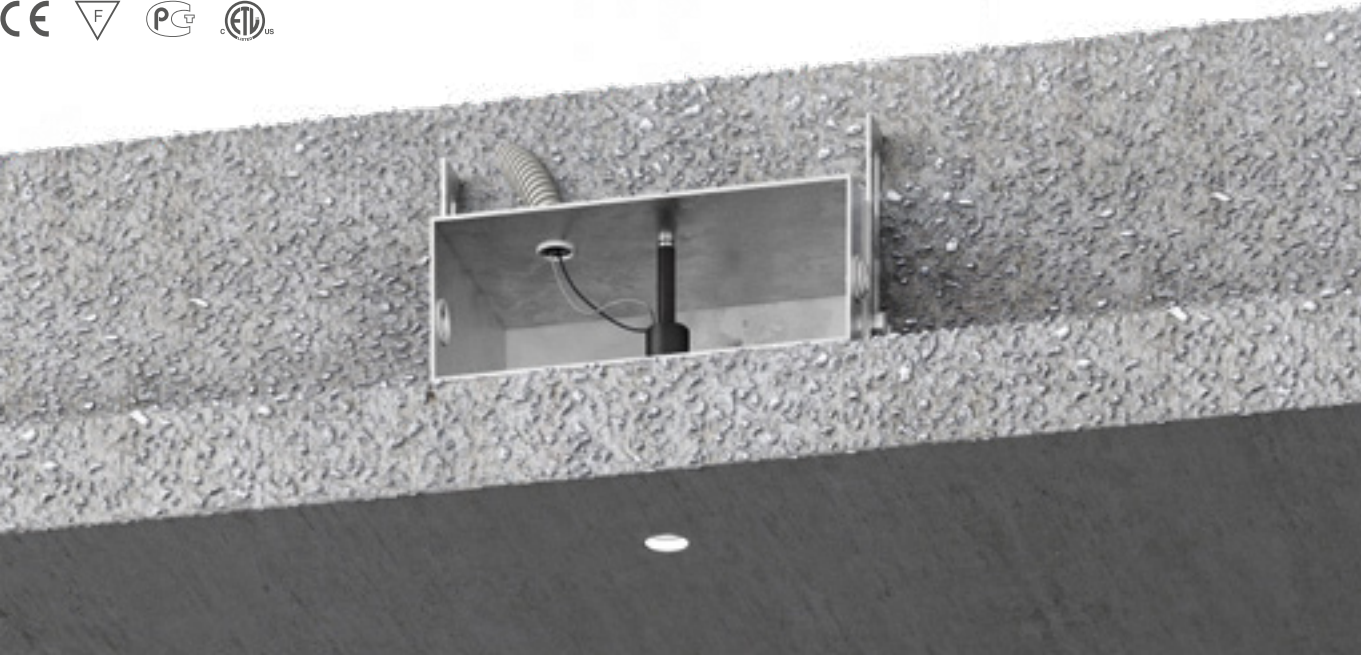


matt black

LUCE INTEGRATA NEL CEMENTO FACCIA A VISTA.

Genius Concrete IP65 è la variante più rivoluzionaria della linea Genius: un apparecchio a scomparsa totale per interni, concepito per superfici in cemento faccia-vista ed installabile durante la fase di getto del calcestruzzo. Mantiene le prestazioni del Genius, ma ha un corpo lampada semplificato che funziona come cassaforma a perdere, con la parte elettrica estraibile direttamente dal foro luce, grazie ad un nuovo brevetto che permette l'estrazione e la sostituzione della sorgente LED. L'unica apertura visibile è il foro da 23 mm, senza la necessità di alcuna scatola di ispezione ed è installabile per getti con spessore minimo di 12 mm.

INTEGRATED LIGHT IN EXPOSED CEMENT.

Genius Concrete IP65 is the most revolutionary version of the Genius line: a totally recessed indoor luminaire, designed for exposed cement surfaces and installable during the concrete casting phase. It maintains all the performances of the Genius, but has a simplified lamp body which functions as formwork, with the electrical part removable from the light hole, thanks to a new patent which allows the LED light source to be pulled out and replaced. The only visible aperture is the 23 mm (0.90") outlet, so there is no need for any inspection hatch, and it can be installed with a minimum concrete cover of 12 mm (0.47").



CODE COMPOSITION

1077 BL 4 R 22 E _ WD	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K
example of code composition	1077 BL 4 R 22 E 30 WD	

TECHNICAL FEATURES

Code	1077 XX
Type	Downlight 90°
Material	Aluminum
Finishing	Black
Weight	0.4 Kg
Mounting	Ceiling recessed
IP rating	IP65
Insulation class	III
Control gear	Remote constant current electronic driver (not included)
Cut out for plasterboard	-
Lamp type	LED 500 mA Vf: 11.5 VDC
Lamp wattage	1 x 6W
Luminous efficacy	600 lm - 3000K
Light distribution	Beam 22°
Fitting	-
Light colour	White 3000K White 2700K I 4000K (on request)
Voltage connection	By driver (optional)
CRI	>90
Emergency	-
Note	On request available dimmable PUSH or DALI.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1075 XX	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°3 code 1075 XX - 500 mA

F40




matt white

MINI INCASSO
CON GRADO DI PROTEZIONE IP44 E IP65.

La luce scaturisce da un punto nella parete, pura e delicata si diffonde in modo omogeneo nello spazio, avvolgendo tutto l'ambiente. F40, un incasso da esterni per installazione a parete e soffitto di cartongesso disponibile con finitura bianca e dotato di lente in policarbonato extra trasparente, dà vita a punti luminosi unici e suggestivi.

MINI RECESSED LUMINAIRE
WITH IP44 AND IP65 PROTECTION RATING.

The light comes from a single point on the wall and, pure and delicate, uniformly scatters around, embracing the entire environment. F40, a recessed outdoor luminaire installable on plasterboard walls and ceilings, is available with white finishings. Provided with an ultra-transparent polycarbonate lens, it gives life to unique and suggestive light spots.



CODE COMPOSITION

1021 WH 2 R 14 E _ WD	<i>light colour</i>	
	27	2700K
	30	3000K
2061 WH 2 R 14 E _ WD	<i>light colour</i>	
	27	2700K
	30	3000K
example of code composition	1021 WH 2 R 14 E 30 WD	

TECHNICAL FEATURES

Code	1021 XX	2061 XX
Type	Downlight 90° Wall recessed 90° 	Downlight 90° Wall recessed 90°
Material	Aluminum	Aluminum
Finishing	White	White
Weight	0.06 Kg	0.06 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP44	IP65
Insulation class	III	III
Control gear	Constant current electronic driver (not included)	Constant current electronic driver (not included)
Cut out for plasterboard	Ø 32 mm	Ø 32 mm
Lamp type	LED Vf: 3 VDC	LED Vf: 3 VDC
Lamp wattage	1W - 350mA 2W - 500mA	1W - 350mA 2W - 500mA
Luminous efficacy	75 lm - 3000K - 350mA 170 lm - 3000K - 500mA	75 lm - 3000K - 350mA 170 lm - 3000K - 500mA
Light distribution	Narrow beam 14°	Narrow beam 14°
Fitting	-	-
Light colour	White 3000K White 2700K (on request)	White 3000K White 2700K (on request)
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	>90
Emergency	-	-
Note	On request available dimmable PUSH or DALI, remote installation.	On request available dimmable PUSH or DALI, remote installation.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1021 XX / 2061 XX	H8350	Constant current electronic driver	Suitable for n°1 code 1021 XX / 2061 XX - 350 mA
	H8500.B	Constant current electronic driver. Remote installation	Suitable for n°5 code 1021 XX / 2061 XX - 500 mA
	H8500.C	Constant current electronic driver. Remote installation	Suitable for n°2 code 1021 XX / 2061 XX - 500 mA



H2NOT




matt white

INCASSO CON GRADO DI PROTEZIONE IP65.

Un'illuminazione che regala fascino ad ambienti che hanno bisogno di un grado di protezione contro l'acqua: H2NOT è un apparecchio in alluminio da esterni ad incasso per installazione a soffitto e a parete, ed è l'alleato perfetto per garantire la giusta luminosità di SPA, wellness club o spazi privati dove l'acqua e la luce sono le vere protagoniste. Le caratteristiche di impermeabilità all'acqua unite alla verniciatura a polveri ad alta resistenza lo rendono uno strumento ideale per gli ambienti umidi.

RECESSED WITH IP65 PROTECTION RATING.

An illumination capable of giving the right charm to environments which need protection from water: H2NOT is a recessed outdoor luminaire in aluminium installable on ceilings and walls and available with white finishings. It is the perfect ally to guarantee the correct lighting in SPAs, wellness clubs or private spaces where water and light are the real protagonists. Its waterproof characteristics, combined with its resistance dust painting, make H2NOT ideal for moist places.



CODE COMPOSITION

2041 WH 2 R 40 E _ WD	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K

2044 WH 4 R 40 E 98 WD

example of code composition 2041 WH 2 R 40 E 30 WD


TECHNICAL FEATURES

Code	2041 XX	2044 XX
Type	Downlight 90° Wall recessed 90° 	Downlight 90° Wall recessed 90°
Material	Aluminum	Aluminum
Finishing	White	White
Weight	0.25 Kg	0.25 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP65	IP65
Insulation class	III	III
Control gear	Constant current electronic driver (not included)	Remote dimmable constant current electronic driver** (not included)
Cut out for plasterboard	Ø 75 mm	Ø 75 mm
Lamp type	LED 500 mA Vf: 18 VDC	LED 350 mA Vf: 17 VDC
Lamp wattage	1 x 9W	1 x 6W
Luminous efficacy	1125 lm - 3000K	600 lm (from 1800K up to 3000K)
Light distribution	Wide beam 40°	Wide beam 40°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	Dimming range 1800/3000K
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	95
Emergency	-	-
Note	On request available dimmable PUSH or DALI.	On request available dimmable PUSH or DALI, remote installation.

**H2NOT code 2044 XX requires dimming: amplitude (AM) IEEE1789-2015 dim to warm wide range input voltage.

OPTIONAL ACCESSORIES

product code	optional code	description	info
2041 XX	H8500.E	Constant current electronic driver	Suitable for n°2 code 2041 XX - 500 mA
	H8500.B	Constant current electronic driver	Suitable for n°1 code 2041 XX - 500 mA
2044 XX	H8350DA.AM	Dimming: amplitude (AM) DALI	Suitable for n°2 code 2044 XX
	H8350PH.AM	Dimming: amplitude (AM) PUSH	Suitable for n°2 code 2044 XX



CODE COMPOSITION

2042 WH 6 R 00 E 00 WD

2043 WH 6 R 00 E 00 WD

TECHNICAL FEATURES

Code	2042 XX	2043 XX
Type	Downlight 90° Wall recessed 90° 	Downlight 90° Wall recessed 90° 
Material	Aluminum	Aluminum
Finishing	White	White
Weight	0.15 Kg	0.15 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP65	IP65
Insulation class	III	I
Control gear	Electronic transformer (not included)	-
Cut out for plasterboard	Ø 75 mm	Ø 75 mm
Lamp type	QR CB 51 	QPAR 16 
Lamp wattage	50W max	50W max
Luminous efficacy	-	-
Light distribution	-	-
Fitting	GU5.3	GU10
Light colour	-	-
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	-	-
Emergency	-	-
Note	-	-

OPTIONAL ACCESSORIES

product code	optional code	description	info
2042 XX	H8060.LED	Dimmable electronic transformer	Max watt 60W Volts · Hz 230/12V · 50/60Hz
	0008KIT	Kit LED dimmable	Bulb 7W · 12V
2043 XX	0009KIT	Kit LED dimmable	Bulb 6W · 220-240V



H2STOP




matt white

INCASSO CON GRADO DI PROTEZIONE IP65.

H2STOP è un apparecchio in alluminio da esterni ad incasso, pensato per l'installazione in ambienti umidi come bagni o SPA. Grazie alle linee pulite del suo design minimale, sa fondersi negli ambienti, diventando un immancabile alleato di ogni progettista. Caratterizzato da una verniciatura a polveri ad alta resistenza con finitura bianca.

RECESSED WITH IP65 PROTECTION RATING.

H2STOP is a recessed outdoor luminaire in aluminium designed for being installed in moist places such as bathrooms and SPAs. Thanks to the neat lines of its minimal design, it mingles with the environment, becoming the best ally for every architect or designer. It is characterized by a strongly resistance dust painting with white finishings.



CODE COMPOSITION

2051 WH 2 R 40 E _ WD	light colour	
	27	2700K
	30	3000K
	40	4000K

2054 WH 4 R 40 E 98 WD

example of code composition 2051 WH 2 R 40 E 30 WD


TECHNICAL FEATURES

Code	2051 XX	2054 XX
Type	Downlight 90° Wall recessed 90° 	Downlight 90° Wall recessed 90°
Material	Aluminum	Aluminum
Finishing	White	White
Weight	0.25 Kg	0.25 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP65	IP65
Insulation class	III	III
Control gear	Constant current electronic driver (not included)	Remote dimmable constant current electronic driver** (not included)
Cut out for plasterboard	75 x 75 mm	75 x 75 mm
Lamp type	LED 500 mA Vf: 18 VDC	LED 350 mA Vf: 17 VDC
Lamp wattage	1 x 9W	1 x 6W
Luminous efficacy	1125 lm - 3000K	600 lm (from 1800K up to 3000K)
Light distribution	Wide beam 40°	Wide beam 40°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	Dimming range 1800/3000K
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	95
Emergency	-	-
Note	On request available dimmable PUSH or DALI.	On request available dimmable PUSH or DALI, remote installation.

**H2STOP code 2054 XX requires dimming: amplitude (AM) IEEE1789-2015 dim to warm wide range input voltage.

OPTIONAL ACCESSORIES

product code	optional code	description	info
2051 XX	H8500.E	Constant current electronic driver	Suitable for n°2 code 2051 XX - 500 mA
	H8500.B	Constant current electronic driver	Suitable for n°1 code 2051 XX - 500 mA
2054 XX	H8350DA.AM	Dimming: amplitude (AM) DALI	Suitable for n°2 code 2054 XX
	H8350PH.AM	Dimming: amplitude (AM) PUSH	Suitable for n°2 code 2054 XX



CODE COMPOSITION

2052 WH 6 R 00 E 00 WD

2053 WH 6 R 00 E 00 WD

TECHNICAL FEATURES

Code	2052 XX	2053 XX
Type	Downlight 90° Wall recessed 90° 	Downlight 90° Wall recessed 90° 
Material	Aluminum	Aluminum
Finishing	White	White
Weight	0.2 Kg	0.2 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP65	IP65
Insulation class	III	I
Control gear	Electronic transformer (not included)	-
Cut out for plasterboard	75 x 75 mm	75 x 75 mm
Lamp type	QR CB 51 	QPAR 16 
Lamp wattage	50W max	50W max
Luminous efficacy	-	-
Light distribution	-	-
Fitting	GU5.3	GU10
Light colour	-	-
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	-	-
Emergency	-	-
Note	-	-

OPTIONAL ACCESSORIES

product code	optional code	description	info
2052 XX	H8060.LED	Dimmable electronic transformer	Max watt 60W Volts · Hz 230/12V · 50/60Hz
	0008KIT	Kit LED dimmable	Bulb 7W · 12V
2053 XX	0009KIT	Kit LED dimmable	Bulb 6W · 220-240V



H2STOP
SUPERFUTUREDESIGN*

298	S1
302	S1G
306	DB9
310	DB10
314	DB11

Surface

STAND ALONE

S1




matt black

PROIETTORE MULTI DIREZIONALE IP65.

S1 è un proiettore per esterni adatto per installazioni a superficie. Grazie ad una piastra di fissaggio dalle forme discrete ed ad un'asta di 80 mm, il proiettore può scorrere e trovare la giusta posizione e inclinazione grazie alla possibilità di rotazione sull'asse orizzontale di circa 360°. Versatile e minimale è in grado di valorizzare con il suo fascio puntuale particolari dettagli degli spazi esterni.

MULTI-DIRECTIONAL IP65 PROJECTOR.

S1 is an outdoor projector suitable for surface installations. Thanks to a discreetly shaped fixing plate and an 80 mm rod, the projector can slide and find the right position and inclination thanks to the possibility of rotation on the horizontal axis of about 360°. Versatile and minimalist, it is able to enhance particular details of outdoor spaces with its precise beam.



CODE COMPOSITION

2083 BL 4 S _ E _ WD		
	light colour	
	27	2700K
	30	3000K
	lens	
	22	22°
	50	50°
example of code composition	2083 BL 4 S 22 E 30 WD	

TECHNICAL FEATURES

Code	2083 XX
Type	Projector ± 360°
Material	Aluminum
Finishing	Black
Weight	0.4 Kg
Mounting	Wall lamp
IP rating	IP65
Insulation class	III
Control gear	Constant current electronic driver (not included)
Lamp type	LED 500 mA Vf: 11 VDC
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K (on request)
Voltage connection	By driver (optional)
CRI	>90
Emergency	-
Note	Watertight connection device: useful to block the penetration of humidit caused by the fenomenon of the backwash of the depression created in the lighting fixtures during the cooling process of the lamp.

OPTIONAL ACCESSORIES


product code	optional code	description	info
2083 XX	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°3 code 2083 XX - 500 mA



S1G



matt black

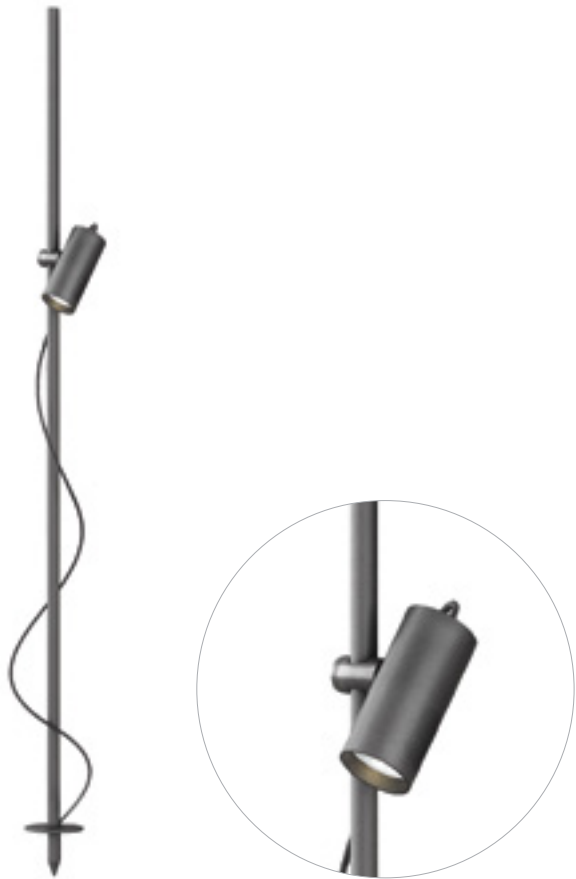


PROIETTORE A PICCHETTO IP65 MULTI DIREZIONALE.

S1G è un proiettore per ambienti esterni adatto per installazioni direttamente nel terreno, grazie ad un picchetto e ad una piastra nella parte terminale. Con un'estensione massima di 80 cm il proiettore può essere installato a qualsiasi altezza. Orientabile a 360°, è perfetto per valorizzare essenze o percorsi all'interno di spazi verdi.

IP65 MULTI-DIRECTIONAL STAKE PROJECTOR.

S1G is an outdoor projector that can be installed directly in the ground thanks to a stake and a plate at the end. With a maximum extension of 80 cm the projector can be installed at any height. Adjustable at 360°, it is perfect to enhance essences or paths in green areas.

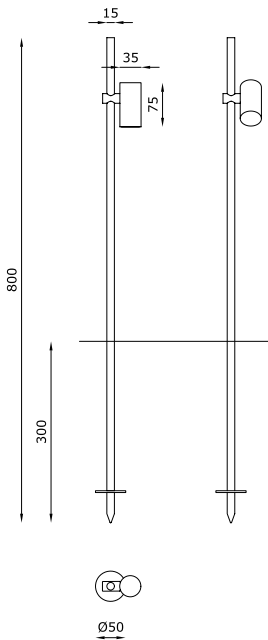

CODE COMPOSITION

2082 BL 4 S _ E _ WD

light colour

27 2700K
30 3000K

lens

22 22°
50 50°

example of
code composition

2082 BL 4 S 22 E 30 WD

TECHNICAL FEATURES

Code	2082 XX
Type	Projector ± 360°
Material	Aluminum
Finishing	Black
Weight	-
Mounting	Ground lamp
IP rating	IP65
Insulation class	III
Control gear	Constant current electronic driver (not included)
Lamp type	LED 500 mA Vf: 11 VDC
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K (on request)
Voltage connection	By driver (optional)
CRI	>90
Emergency	-
Note	Watertight connection device: useful to block the penetration of humidit caused by the fenomenon of the backwash of the depression created in the lighting fixtures during the cooling process of the lamp.

OPTIONAL ACCESSORIES

product code	optional code	description	info
2082 XX	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°3 code 2082 XX - 500 mA



DB9




LAMPADA DA ESTERNO IP65 E IK05.

Una presenza discreta, una luce decisa: DB9, apparecchio per esterni a parete a mono e biemissione, disponibile con finitura bianca o silver, lo rendono un prodotto dalle performance uniche, in grado di integrarsi perfettamente nelle superfici e di diventare protagonista. Un'anima versatile per un prodotto dalla luce inconfondibile. DB9 ha un corpo in alluminio pressofuso, un diffusore in vetro satinato, oltre a guarnizioni in silicone e viti interne in acciaio inox che lo rendono ideale per ambienti esterni.

IP65 AND IK05 LUMINAIRE FOR OUTDOORS.

A discreet presence, a defined light: technology and design make DB9, an outdoor luminaire with mono or bi-emission, installable on walls and available with white or silver finishings. DB9 is a product providing unique and unforgettable performances that perfectly integrates itself with the surfaces it is applied to, becoming the main protagonist of that environment. A versatile soul for a product with an unmistakable light. DB9 has an internal body in die-cast aluminium, a satin-glass diffuser, silicone gaskets and internal inox-steel screws which make it the ideal product for outdoor environments.



CODE COMPOSITION

201	3 S 00 E _ WD		
		<i>light colour</i>	
		30	3000K
		40	4000K
		<i>finishing</i>	
		WH	white
		SL	silver
		<i>type</i>	
		1	mono direction light
		2	double direction light

2013	6 S 00 E 00 WD		
		<i>finishing</i>	
		WH	white
		SL	silver

2013	6 S 00 E 00 WD			
			<i>finishing</i>	
			WH	white
			SL	silver

example of code composition 2011 WH 3 S 00 E 30 WD

TECHNICAL FEATURES

Code	2011 XX / 2012 XX	2013 XX	
Type	Wall lamp	Wall lamp	
Material	Aluminum	Aluminum	
Finishing	White I Silver	White I Silver	
Weight	1.1 Kg	1.1 Kg	
Mounting	Wall mounting	Wall mounting	
IK protection degree	IK 05	IK 05	
IP rating	IP65	IP65	
Insulation class	I	I	
Control gear	No transformer is required, direct operation at 220-240V	-	
Lamp type	LED 	QT-14 	
Lamp wattage	Mono: 1 x 4W Double: 2 x 4W	60W	
Luminous efficacy	Mono: 400 lm - 3000K Double: 2 x 400 lm - 3000K	-	
Light distribution	Wide beam 120°	-	
Fitting	-	G9	
Light colour	White 3000K White 4000K (on request)	-	
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	
CRI	>90	-	
Emergency	-	-	
Note	Mono direction light 	Double direction light 	Double direction light 



DB9
SUPERFUTUREDESIGN*

DB10




LAMPADA DA ESTERNO IP65 E IK05.

Estetica e tecnologia avanzata si fondono e danno vita a DB10, apparecchio per esterni a parete a mono o biemissione, disponibile con finitura bianca o silver: un'applique discreta ed elegante, che valorizza facciate, percorsi e punti di accesso. Un prodotto che sa come dipingere emozioni con la luce. DB10 ha un corpo in alluminio pressofuso, un diffusore in vetro satinato, oltre a guarnizioni in silicone e viti interne in acciaio inox che lo rendono ideale per ambienti esterni.

IP65 AND IK05 LUMINAIRE FOR OUTDOORS.

Aesthetics and technology combined give life to DB10, an outdoor luminaire with mono or bio-emission installable on walls. Available with white or silvery finishings, it has a discreet and elegant presence which valorizes facades, paths and entrances. A product capable of drawing emotions with light. DB10 has an internal body in die-cast aluminium, a satin-glass diffuser, silicone gaskets and internal inox-steel screws which make it the ideal product for outdoor environments.

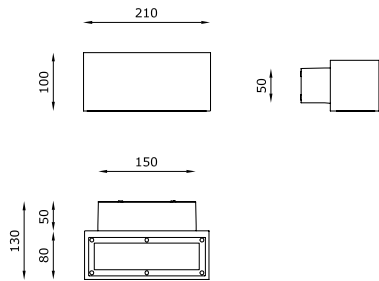

CODE COMPOSITION

202	2	S	00	E	ND	<i>light colour</i>	
						27	2700K
						30	3000K
						40	4000K
						<i>finishing</i>	
202	6	S	00	E	00	ND	<i>type</i>
202	6	S	00	E	00	ND	<i>type</i>

example of code composition 2021 WH 2 S 00 E 30 ND

TECHNICAL FEATURES

Code	2021 XX / 2022 XX	2023 XX / 2024 XX
Type	Wall lamp	Wall lamp
Material	Aluminum	Aluminum
Finishing	White I Silver	White I Silver
Weight	2.2 Kg	2.2 Kg
Mounting	Wall mounting	Wall mounting
IK protection degree	IK 07	IK 07
IP rating	IP65	IP65
Insulation class	I	I
Control gear	Constant voltage LED driver (included)	Conventional ballast (included)
Lamp type	LED 24 VDC 	TC-D
Lamp wattage	Mono: 1 x 10W Double: 2 x 10W	26W
Luminous efficacy	Mono: 1400 lm - 3000K Double: 2 x 1400 lm - 3000K	-
Light distribution	Wide beam 120°	-
Fitting	-	G24d-3
Light colour	White 3000K White 2700K I 4000K (on request)	-
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	-
Emergency	-	-
Note	Mono direction light 	Double direction light



DB11



LAMPADA DA ESTERNO IP65 E IK05.


DB11 è un apparecchio per esterni a parete a mono o biemissione, disponibile con finitura bianca o silver. È un'applique che rompe l'oscurità per creare efficaci atmosfere luminose, esaltando percorsi e punti di accesso, facciate e volumi. Sotto le sue linee semplici ed eleganti, una tecnologia avanzata che si integra perfettamente con l'ambiente che lo circonda.

DB11 ha un corpo in alluminio pressofuso, un diffusore in vetro satinato, oltre a guarnizioni in silicone e viti interne in acciaio inox che lo rendono ideale per ambienti esterni.

IP65 AND IK05 LUMINAIRE FOR OUTDOORS.

DB11 is an outdoor luminaire with mono or bi-emission. Available with white or silvery finishings, it is a product which breaks into darkness creating suggestive luminescent settings and valorizing facades, paths, entrances and volumes. Under its simple and elegant lines, lies an advanced technology which perfectly fits in the environment surrounding it.

DB11 has an internal body in die-cast aluminium, a satin-glass diffuser, silicone gaskets and internal inox-steel screws which make it the ideal product for outdoor environments.

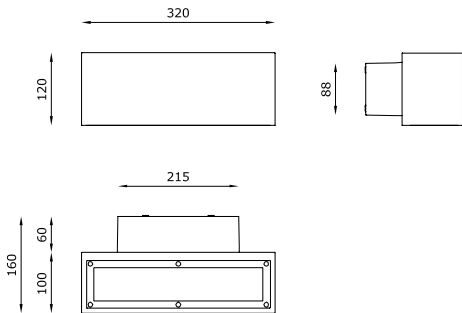

CODE COMPOSITION

203	_ 2 S 00 E _ ND	<i>light colour</i>	
		27	2700K
		30	3000K
		40	4000K
		<i>finishing</i>	
203	_ 6 S 00 E 00 ND	WH	white
		SL	silver
		<i>type</i>	
		1	mono direction light
		2	double direction light
203	_ 6 S 00 E 00 ND	<i>finishing</i>	
		WH	white
		SL	silver
		<i>type</i>	
		3	mono direction light
203	_ 6 S 00 E 00 ND	4	double direction light

example of code composition 2031 WH 2 S 00 E 30 ND

TECHNICAL FEATURES

Code	2031 XX / 2032 XX	2033 XX / 2034 XX	
Type	Wall lamp	Wall lamp	
Material	Aluminum	Aluminum	
Finishing	White I Silver	White I Silver	
Weight	3.8 Kg	3.8 Kg	
Mounting	Wall mounting	Wall mounting	
IK protection degree	IK 07	IK 07	
IP rating	IP65	IP65	
Insulation class	I	I	
Control gear	Constant voltage LED driver (included)	Conventional ballast (included)	
Lamp type	LED 24 VDC	TC-D	
Lamp wattage	Mono: 1 x 13W Double: 2 x 13W	2 x 26W	
Luminous efficacy	Mono: 1700 lm - 3000K Double: 2 x 1700 lm - 3000K	-	
Light distribution	Wide beam 120°	-	
Fitting	-	G24d-3	
Light colour	White 3000K White 2700K I 4000K (on request)	-	
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	
CRI	>90	-	
Emergency	-	-	
Note	Mono direction light	Double direction light	Mono direction light
			Double direction light

General information

Le apparecchiature illustrate in questo catalogo, sono state progettate e costruite in conformità alle vigenti normative nazionali ed internazionali. Tutti gli apparecchi sono realizzati in conformità alle Direttive comunitarie EEC 73/23 LVD – EEC 89/336 EMC – EEC 93/68 CE Mark e muniti di marcatura **CE**.

The luminaires described in this catalogue have been designed and built in compliance with the applicable local and international regulations. All the luminaires have been built in conformity with the EEC 73/23 LVD – EEC 89/336 EMC – EEC 93/68 CE Mark European directives and provided with **CE** Mark.

GRADO DI PROTEZIONE
PROTECTION GRADE

corpi solidi (prima cifra) solid bodies (first numeral)		corpi liquidi (seconda cifra) liquids (second numeral)	
0_	Non protetto No protection	_0	Non protetto No protection
1_	Protetto da solidi superiori a ø 50 mm Protection against solid bodies larger than ø 50 mm	_1	Protetto dalla caduta verticale di gocce di acqua Protected against vertically falling water drops
2_	Protetto da solidi superiori a ø 12 mm Protection against solid bodies larger than ø 12 mm	_2	Protetto dalla caduta di gocce di acqua con involucro inclinato max 15° Protected against vertically falling water drops when enclosure is tilted up to 15°
3_	Protetto da penetrazione di sonda con ø superiore a 2,5 mm Protection against penetration by probes larger than ø 2.5 mm	_3	Protetto dalla pioggia Protected against rain
4_	Protetto da penetrazione di sonda con ø superiore a 1 mm Protection against penetration by probes larger than ø 1 mm	_4	Protetto dagli spruzzi di acqua Protected against spraying water
5_	Protetto contro l'ingresso di polvere Protection against ingress of dust	_5	Protetto da getti di acqua Protected against water jets
6_	Stagno alla polvere Dust-tight	_6	Protetto dalle onde Protected against powerful water jets
		_7	Stagno alla sommersione Sealed against immersion
		_8	Stagno alla sommersione Sealed against immersion

CLASSE DI ISOLAMENTO
INSULATION CLASS

	Classe 0 Class 0	Apparecchio dotato di solo isolamento funzionale. Protezione: data dall'ambiente. Luminaire with functional insulation only. Protection: given by the environment.
	Classe 1 Class 1	Apparecchio dotato di isolamento di base. Protezione: collegamento delle parti metalliche accessibili alla terra di protezione. Luminaire with basic insulation. Protection: connection of the accessible metal parts to the earthing protection.
	Classe 2 Class 2	Apparecchio dotato di doppio isolamento. Protezione: mediante isolamento supplementare. Luminaire with double insulation. Protection: through additional insulation.
	Classe 3 Class 3	Apparecchio idoneo per alimentazione a bassissima tensione di sicurezza. Protezione: intrinsecamente sicuro. Le parti che portano corrente possono essere accessibili. Luminaire suitable for supply at safety extra low voltage. Protection: intrinsically safe. The live parts can be accessed.

CLASSIFICAZIONE SECONDO IL MATERIALE DELLA SUPERFICIE DI INSTALLAZIONE
RATING ACCORDING TO THE MOUNTING SURFACE MATERIAL.

	Apparecchio predisposto per il montaggio diretto su superfici infiammabili. Luminaire designed for direct mounting on inflammable surfaces.
	Apparecchio idoneo ad essere installato su superfici normalmente infiammabili rispettando la distanza indicata tra prodotto e pareti. Luminaire designed for installation on normally inflammable surfaces provided that the distance indicated between product and walls is respected.
	Apparecchio idoneo per montaggio solo su superfici non infiammabili. Luminaire designed for mounting only on non-inflammable surfaces.

Certifications

APPROVATA QUALITÀ
APPROVED QUALITY

	TCNA TCNA	TCNA, Tile Council of North America, è l'ente Americano che certifica l'AirCoral® come materiale: ANTIBATTERICO capace di eliminare i batteri dalle superfici; ANTINUQUINANTE capace di ridurre gli elementi inquinanti presenti nell'aria; FOTOCATALITICO capace di ridurre gli elementi dannosi. <i>TCNA, Tile Council of North America, is the American body that has certified the AirCoral® material as: ANTIBACTERIAL able to eliminate bacteria on its surfaces ANTI-POLLUTING able to reduce polluting elements in the air PHOTOCATALYTIC able to reduce harmful elements.</i>
	REACH - sicurezza chimica REACH - chemical safety	Regolamentazione e certificazione (direttiva Parlamento Europeo) per la produzione di sostanze chimiche, con lo scopo di proteggere l'uomo e l'ambiente da sostanze tossiche. Il prodotto AirCoral® è privo di sostanze tossiche, non contiene elementi dannosi per la salute dell'uomo o inquinanti secondo l'elenco registrato dall'Agenzia Europea delle sostanze chimiche (ECHA). <i>Regulation and certification (European Parliament directive) for the production of chemical substances, in order to protect people and environment against toxic substances. The AirCoral® product is devoid of toxic substances, it does not contain noxious elements for the human health or polluting elements according to the registered list of the European Agency for chemical substances (ECHA).</i>
	MADE IN ITALY Iscrizione Buzzi IT MADE IN ITALY IT Registration Buzzi	Istituto per la tutela dei produttori italiani. Certifica che la collezione Buzzi & Buzzi è interamente prodotta in Italia, non importata ed utilizza la migliore componentistica elettronica europea. Una garanzia per la lotta alla contraffazione del made in Italy, troppo spesso solo dichiarato senza essere ufficialmente certificato, e per un'assoluta tutela dei consumatori finali. Grazie al certificato "Made in Italy Certificate", si fa netta la distinzione tra la produzione 100% made in Italy e quella semplicemente dichiarata ma di dubbia provenienza. <i>Institute for the tutelage of the Italian manufacturers. It certifies that the Buzzi & Buzzi collection is entirely produced in Italy, not imported and it is using the best european electronic components. A guarantee for the fight against fakes of the made in Italy, too often only declared without being officially certified, and for the absolute tutelage of the final consumers. Thanks to the "Made in Italy Certificate", you can distinguish clearly between the 100% made in Italy production and the one simply declared but with doubtful origin.</i>
	Certificazione Europea European Certification	Conformità Européenne. La Società Buzzi & Buzzi è certificata da Ente Terzo notificato per la sicurezza dei propri prodotti che garantisce la conformità alle più restrittive norme tecniche vigenti. <i>European Conformity. The company Buzzi & Buzzi is certified by a notified Third Board for the security of the own products, guaranteeing the conformity to the most restrictive technical regulations in force.</i>
	Certificazione Gost – R Certification Gost – R	Certificazione della qualità del prodotto e conformità alle normative ed esigenze della federazione russa. <i>Product quality certification in conformity to the regulations and requirements of the Russian Federation.</i>
	Certificazione LEED LEED Certification	La certificazione LEED, Leadership in Energy and Environmental Design, è lo standard riconosciuto per misurare l'impatto ambientale e la sostenibilità degli edifici. Ottenere la certificazione LEED è il miglior modo per dimostrare che un edificio, in ogni sua parte, è veramente "green". <i>LEED (Leadership in Energy and Environmental Design) certification is the recognised standard for measuring the environmental impact and sustainability of buildings. LEED certification is the best proof that a building is well and truly "green".</i>
	Certificazione UL UL Certification	UL, Underwriters Laboratories, è il laboratorio di prova maggiormente riconosciuto per l'omologazione degli apparecchi commercializzati in America. La collezione Buzzi & Buzzi è in fase di certificazione; contattare l'azienda per ulteriori informazioni. <i>UL, Underwriters Laboratories, is the best recognised test lab for the certification of devices traded in America. Buzzi & Buzzi's collection is currently in the process of being certified. Please contact the company for further information.</i>
	Certificazione ETL ETL Certification	ETL, Electrical Testing Laboratories, è una certificazione di sicurezza. Indica che il prodotto è stato testato per poter essere venduto e distribuito nel territorio nordamericano. La collezione Buzzi & Buzzi è certificata; si prega di contattare per ulteriori aggiornamenti. <i>ETL, Electrical Testing Laboratories, is a quality certification. It guarantees that the product was tested before being sold and delivered within the North American boundaries. The collection of Buzzi & Buzzi is certified; for further updates, please contact us.</i>

DC DURCORAL®

SPECIFICHE
SPECIFICATIONS

Colore (decorabile) Color (paintable)	standard DurCoral® Bianco ghiaccio standard color DurCoral® Ice white	Resistenza meccanica alla compressione Compressive strength	≥140 N/mm² ≥ 140 N/mm²
Resistenza all'umidità Humidity resistance	elevatissima very high	Resistenza meccanica alla flessione Flexural strength	≥ 55 N/mm² ≥ 55 N/mm²
Porosità all'acqua Porosity to water	≤ 2% ≤ 2%	Spolverabilità di superficie Surface sprinkling ability	≤ 7 gr/mq ≤ 7 gr/mq
Resistenza al gelo /disgelo severo Resistance to severe freezing / thawing	elevatissima very high		

0

0008KIT	200
0009KIT	200

1

1012	253
1021	285
1022	195
1031	199
1032	200
1033	200
1034	199
1041	203
1042	204
1043	204
1044	203
1053	193
1061	210
1062	210
1065	215
1066	215
1071	207
1072	207
1075	218
1076	218
1077	283
1101	223
1102	224
1111	243
1112	243
1121	247
1122	247
1131	259
1132	259
1135	267
1136	267
1140	263
1141	263
1201	233
1202	229
1301	236
1302	235
1401	239
1501	249
1502	250

2

2011	307
2012	307

2013	
2021	
2022	
2023	
2024	
2031	
2032	
2033	
2034	
2041	
2042	
2043	
2044	
2051	
2052	
2053	
2054	
2061	
2071	
2072	
2075	
2076	
2077	
2082	
2083	

H

H8060.LED	
H8350	
H8350DA.AM	
H8350PH.AM	
H8500.B	
H8500.C	
H8500.E	
H8700.E	

T

T048A00001W1	
T048A00002B1	
T048A00003W1	
T048A00004B1	
T048A00005W1	
T048A00006B1	
T048A00007W1	
T048A00008B1	
T048A00009W1	
T048A00010B1	
T048A00011W1	
T048A00012B1	
T048A00013W1	

307	T048A00014B1
311	T048A00015W1
311	T048A00016B1
311	T048A00018B1
311	T048A00019W1
315	T048A00020B1
315	T048A00023B1
315	T048A0002400
315	T048A0002500
289	T048A00056B1
290	T048A00057B1
290	T048A00058W1
289	T048A00059B1
293	T048A0006000
294	T048A00061B1
294	T048A00062B1
293	T048A00064B1
285	T048A00065B1
277	T048A00066B1
277	T048A00067B1
279	T048A00068B1
279	T048A00069B1
281	T048A00071B1
303	T048A00072B1
299	T048A00073B1
	T048A00074W1
	T048A00075W1
	T048A00076B1
200	T048A00077W1
195	T048A0007800
199	T048A00079B1
199	T048A00080B1
195	T048A00081B1
195	T048A00082W1
199	T048A00083W1
193	T048A00084B1
	T048A00085W2
	T048A00086B1
	T048A00087W2
84	T048A00089B1
78	T048A00090B1
84	T048A00091B1
78	T048A00092W1
84	T048A00093B1
78	T048A00094W1
84	T048A00095B1
78	T048A0009600
86	T048A0009700
86	T048L00001
94	T048L00002
80	T048L00003
87	T048L00004

87	T048L00005
95	T048L00008
80	T048L00009
95	T048L00010
86	T048L00011
86	T048L00012
79	T048L00013
85	T048L00014
79	T048L00015
95	T048L00016
95	T048L00017
87	T048L00018
87	T048L00019
81	T048L00020
128	T048L00021
123	T048L00022
122	T048L00023
122	T048L00024
122	T048T00
123	T048T01
129	T048T02
130	T048T04
80	T048T04B11041
80	T048T04B11051
81	T048T04B11061
95	T048T05
87	T220A00027W2
87	T220A00028B1
88	T220A00029W2
81	T220A00030B1
79	T220A00031W2
94	T220A00032B1
94	T220A00033W2
94	T220A00034B1
94	T220A00035W2
85	T220A00036B1
85	T220A00037W2
85	T220A00038B1
85	T220A00039W2
123	T220A00040B1
131	T220A00041W2
86	T220A00042B1
86	T220A00043W2
86	T220A00044B1
86	T220A00045W2
122	T220A00046B1
81	T220A00047W2
81	T220A00048B1
29	T220A00050W2
33	T220A00051B1
37	T220A00052W2
41	T220A00053B1

45	T220A00054W2
49	T220A00055B1
57	T220L00001
59	T220L00002
61	T220L00003
65	T220L00004
65	T220L00005
69	T220L00006
69	T220L00007
53	T220L00008
107	T220L00009
111	T220L00010
113	T220L00016
113	T220T03
109	TRK0000042
115	
27	
105	
77	
83	
91	
127	
130	
130	
130	
121	
182	
182	
182	
182	
182	
183	
183	
183	
184	
184	
183	
183	
184	
184	
184	
185	
185	
185	
183	
183	
184	
184	

V

VTR0000019	263
------------	-----

Index by Name

B

B-INSIDE	76
B30	82
B55	90

C

C1 48V	64
--------	----

D

DB9	306
DB10	310
DB11	314

F

F40	284
F50	194

G

GENIUS BASIC NAKED	206
GENIUS BASIC NAKED IP65	276
GENIUS CONCRETE	216
GENIUS CONCRETE IP65	282
GENIUS NAKED	208
GENIUS NAKED DIM TO WARM IP65	280
GENIUS NAKED IP65	278
GL 220V	174
GL 48V	58

H

H2NOT	288
H2STOP	292

I

INCISO Q4 220V	168
INCISO Q4 48V	52

L

L1 48V	68
L1 NANO 48V	112
L40	180

M

M1	248
M1 220V	150
M1 48V	40
MIKADO	266
ML 220V	172
ML 48V	56

N

N-INSIDE	120
N10	126

Q

Q1	252
Q1 220V	154
Q1 48V	44
Q2 220V	158
Q3 220V	162
Q4 220V	166
Q4 48V	48

S

S1	298
S1G	302

T

THE DARK	262
THE TUBE	258
THE TUBE 48V	60
THE TUBE NANO 48V	114
TWIN GENIUS NAKED	214

U

U1 48V	26
U1 NANO 48V	104

X

X1	222
X1 220V	140
X1 48V	28
X1 NANO 48V	106
X2	228
X3	234
X4	238
XJR8	198
XJR9	202

Y

Y1	242
Y1 220V	142
Y1 48V	32
Y1D	192

Z

Z1	246
Z1 220V	146
Z1 48V	36
Z1 NANO 48V	110

Buzzi & Buzzi si riserva la facoltà di variare o modificare, senza preavviso, le dimensioni e le caratteristiche tecniche dei prodotti indicati in questo catalogo in funzione delle necessità operative, per migliorarne la funzionalità o in adeguamento a normativa di legge.

Buzzi & Buzzi reserves itself the faculty to change or to modify, without advance notice, the dimensions and the technical characteristics of the products indicated in this catalogue, due to operative necessities to improve the functionality or updating with law regulation.



Legal Office

20060 Pozzo d'Adda (MI) via Milano 17, Italy

Headquarter

24040 Canonica d'Adda (BG) via Pascoli 5, Italy

Tel. +39 02 9094942 - +39 02 9094944

Fax +39 02 9094006

buzzi@buzzi-buzzi.it

www.buzzi-buzzi.it



Download the catalogue