



SFERA

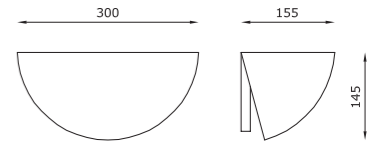

LAMPADA A PARETE, LUCE INDIRECTA,
5 MISURE DIFFERENTI

WALL LAMP, INDIRECT LIGHT,
5 DIFFERENT SIZES

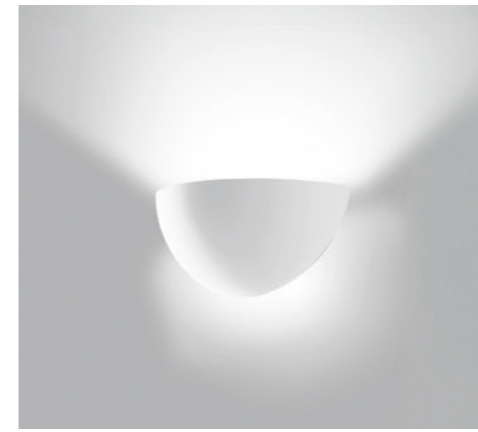

Bauta Sfera



OTHER AVAILABLE CODES

7088.27.AC	<i>lens</i>	120°
	<i>light colour</i>	2700K


TECHNICAL FEATURES

Code	7088.AC	7081.AC	7083.83.AC
Type	Wall lamp	Wall lamp	Wall lamp
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	8.44 m²	8.44 m²	8.44 m²
Mounting	Wall mounting	Wall mounting	Wall mounting
IP rating	IP40	IP20	IP40
Insulation class	I	I	I
Control gear	Dimmable constant current driver (included)	-	-
Lamp type	LED 500 mA 	A 60 	QT-DE12
Lamp wattage	2 × 6.5W	1 × 100W max	1 × 200W max
Luminous efficacy	2 × 810 lm - 3000K	-	-
Light distribution	Wide beam 120°	-	-
Fitting	-	E27	R7s
Light colour	White 3000K	-	-
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	-	-
Emergency	-	-	-
Energy efficiency class	A+	A+	A
Note	Trailing-edge and leading-edge dimming (20 - 100%). Satin glass included. Other available light colours: 2700K, 4000K (on request).	-	-


* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²



Sfera 300

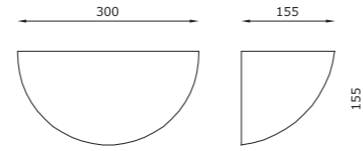

Sfera 400

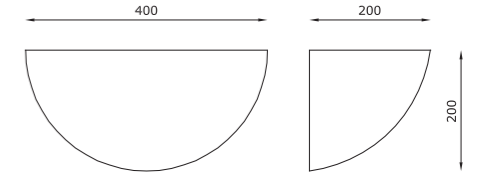


TECHNICAL FEATURES

Code	7028.AC	7021.AC	7023.23.AC
Type	Wall lamp	Wall lamp	Wall lamp
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	7.22 m²	7.22 m²	7.22 m²
Mounting	Wall mounting	Wall mounting	Wall mounting
IP rating	IP40	IP20	IP40
Insulation class	I	I	I
Control gear	Dimmable constant current driver (included)	-	-
Lamp type	LED 500 mA 	A 60 	QT-DE12
Lamp wattage	1 × 6.5W	1 × 100W max	1 × 200W max
Luminous efficacy	1 × 930 lm - 3000K	-	-
Light distribution	Wide beam 120°	-	-
Fitting	-	E27	R7s
Light colour	White 3000K	-	-
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	-	-
Emergency	-	-	-
Energy efficiency class	A+	A+	A
Note	Trailing-edge and leading-edge dimming (20 - 100%). Satin glass included. Other available light colours: 2700K (on request), 4000K (on request).	-	-


TECHNICAL FEATURES

Code	7018.AC	7011.AC	7013.AC
Type	Wall lamp	Wall lamp	Wall lamp
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	13 m²	13 m²	13 m²
Mounting	Wall mounting	Wall mounting	Wall mounting
IP rating	IP40	IP20	IP20
Insulation class	I	I	I
Control gear	Dimmable constant current driver (included)	-	-
Lamp type	LED 500 mA 	A 60 	QT-DE12
Lamp wattage	1 × 6.5W	1 × 100W max	1 × 200W max
Luminous efficacy	1 × 930 lm - 3000K	-	-
Light distribution	Wide beam 120°	-	-
Fitting	-	E27	R7s
Light colour	White 3000K	-	-
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	-	-
Emergency	-	-	-
Energy efficiency class	A+	A+	A
Note	Trailing-edge and leading-edge dimming (20 - 100%). Satin glass included. Other available light colours: 2700K (on request), 4000K (on request).	-	-

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²

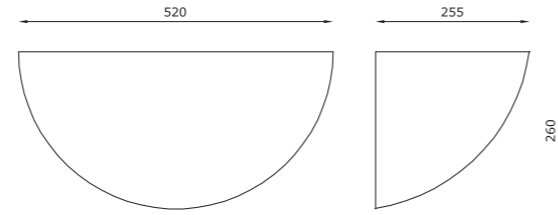

Sfera 520



Sfera Base



TECHNICAL FEATURES

Code	7148.AC	7001.AC	7003.AC
Type	Wall lamp	Wall lamp	Wall lamp
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	22.33 m²	22.33 m²	22.33 m²
Mounting	Wall mounting	Wall mounting	Wall mounting
IP rating	IP20	IP20	IP20
Insulation class	I	I	I
Control gear	Dimmable constant current driver (included)	-	-
Lamp type	LED 500 mA 	A 60 	QT-DE12
Lamp wattage	2 × 6.5W	1 × 100W max	1 × 200W max
Luminous efficacy	2 × 810 lm - 3000K	-	-
Light distribution	Wide beam 120°	-	-
Fitting	-	E27	R7s
Light colour	White 3000K	-	-
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	-	-
Emergency	-	-	-
Energy efficiency class	A+	A+	A+
Note	Trailing-edge and leading-edge dimming (20 - 100%). Satin glass included. Other available light colours: 2700K (on request), 4000K (on request).	-	-

TECHNICAL FEATURES

Code	7042.00
Type	Wall lamp
Material	00: Coral®
Mounting	Wall mounting
IP rating	IP20
Insulation class	I
Control gear	-
Lamp type	QT-DE12
Lamp wattage	1 × 150W max
Luminous efficacy	-
Light distribution	-
Fitting	R7s
Light colour	-
Voltage connection	220-240V · 50/60Hz
CRI	-
Emergency	-
Energy efficiency class	A
Note	-

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²