



BILD

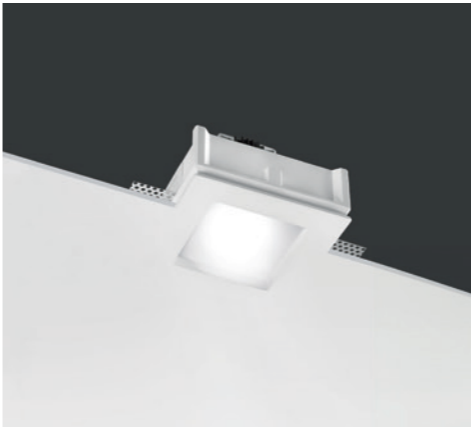

Bild

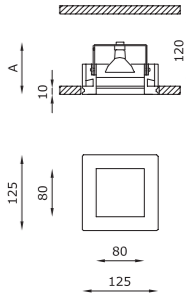

OTHER AVAILABLE CODES

4423.Z.27.00	<i>lens</i>	40°
	<i>light colour</i>	2700K
4423.Z.40.00	<i>lens</i>	40°
	<i>light colour</i>	4000K (on request)

TECHNICAL FEATURES

Code	4423.Z.00	4424.00	4422.00
Type	Downlight 90°	Downlight 90°	Downlight 90°
Material	00: Coral®	00: Coral®	00: Coral®
Weight	1.05 Kg	0.9 Kg	0.95 Kg
Mounting	Ceiling recessed	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40	IP40
Insulation class	III	III	I
Control gear	Remote constant current electronic driver (not included)	Electronic transformer (not included)	-
Dimensions	A: 100 mm	A: 90 mm	A: 100 mm
Cut out for plasterboard	135 × 135 mm	135 × 135 mm	135 × 135 mm
Lamp type	LED 500 mA	QR CB 51	QPAR 16
	Vf: 18 VDC		
Lamp wattage	1 × 9W	1 × 50W max	1 × 50W max
Luminous efficacy	1 × 1125 lm - 3000K	-	-
Light distribution	Wide beam 40°	-	-
Fitting	-	GU5.3	GU10
Light colour	White 3000K	-	-
Light hole	80 × 80 mm	80 × 80 mm	80 × 80 mm
Voltage connection	By driver (optional)	By driver (optional)	220-240V · 50/60Hz
CRI	>90	-	-
Emergency	-	-	-
Energy efficiency class	A++	A++	A++
Note	Extra white satin glass. Frosted glass recessed 10 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 10 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 10 mm into the ceiling.

Other available light colours:  
2700K,  
4000K (on request).

OPTIONAL

ON/OFF driver	cod. H8500.E	-	-
Trailing and leading edge driver	cod. DRV0000163	cod. H8060.LED	-
DALI dimmable LED driver	cod. DRV0000029	-	-
PUSH dimmable LED driver	cod. DRV0000026	-	-
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000093	-	-
Kit LED dimmable	-	cod. 0008KIT	cod. 0009KIT
Brick box	cod. BR4423LT	cod. BR4424LT	cod. BR4422LT


For further info and other available drivers please see page 474

MINIMALISMO E SEMPLICITÀ,  
VETRO RETROCESSO DI 10 mm

MINIMALISM AND SIMPLICITY,  
10 mm RETRACTED GLASS



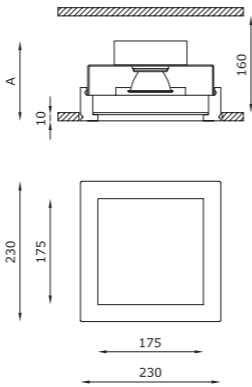

Maxi Bild



OTHER AVAILABLE CODES

4411.27.00	<i>lens</i>	40°
	<i>light colour</i>	2700K
4411.40.00	<i>lens</i>	40°
	<i>light colour</i>	4000K (on request)

TECHNICAL FEATURES

Code	4411.00
Type	Downlight 90°
	
Material	00: Coral®
Weight	3 Kg
Mounting	Ceiling recessed
IP rating	IP40
Insulation class	I
Control gear	ON/OFF driver (included)
Dimensions	A: 135 mm
Cut out for plasterboard	240 × 240 mm
Lamp type	LED 700 mA
	
Lamp wattage	1 × 27W
Luminous efficacy	102 lm/W - 3000K
Light distribution	Wide beam 40°
Fitting	-
Light colour	White 3000K
Light hole	175 × 175 mm
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	Extra white satin glass. Frosted glass recessed 10 mm into the ceiling.
	DALI driver on request.
	Other available light colours: 2700K, 4000K (on request).



INCASSO QUADRATO 175 × 175 mm,  
MINIMALISMO E POTENZA LUMINOSA

SQUARE RECESSED FIXTURE 175 × 175 mm,  
MINIMALISM AND LIGHTING POWER