

BLADE

SISTEMA MODULABILE
E TAGLIABILE A MISURA
MODULAR
AND CUT-TO-SIZE SYSTEM



Blade




OTHER AVAILABLE CODES

6968.27.AC	<i>lens</i>	14°
	<i>light colour</i>	2700K





BLADE IP65
see page 433

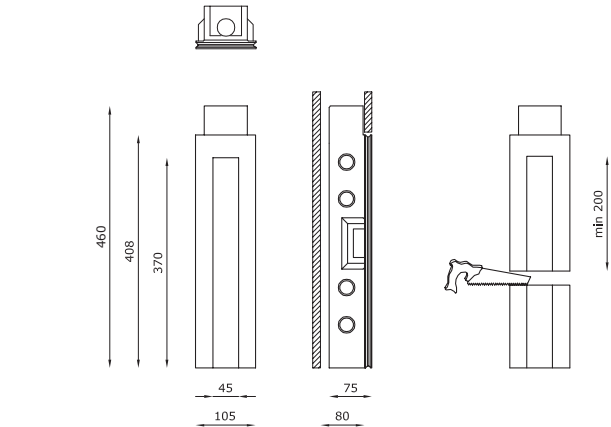* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²



TECHNICAL FEATURES | ELECTRIFIED BODY

Code	6968.AC
Type	Downlight 90° Wall recessed 90° 
Material	AC: AirCoral®
Absorption capacity*	8.14 m²
Weight	2.8 Kg
Mounting	Wall and ceiling recessed
IP rating	IP40
Insulation class	III
Control gear	-
Cut out for plasterboard	415 × 115 mm
Lamp type	LED  Vf: 3 VDC
Lamp wattage	1 × 1W - 350 mA 1 × 2W - 500 mA
Luminous efficacy	1 × 75 lm - 3000K 350 mA 1 × 170 lm - 3000K 500 mA
Light distribution	Narrow beam 14°
Fitting	-
Light colour	White 3000K
Light hole	370 × 45 mm
Voltage connection	By driver (optional)
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	It is possible to cut the electrified body to obtain a light hole 200 mm minimum. Other available light colours: 2700K, 4000K (on request).


OPTIONAL

ON/OFF driver	cod. H8350 cod. H8500.B H8500.C H8500.F
Trailing and leading edge driver	cod. DRV0000087
DALI dimmable LED driver	cod. DRV0000029
PUSH dimmable LED driver	cod. DRV0000026
Brick box	cod. BR6968LT

For further info and other available drivers please see page 474



Blade

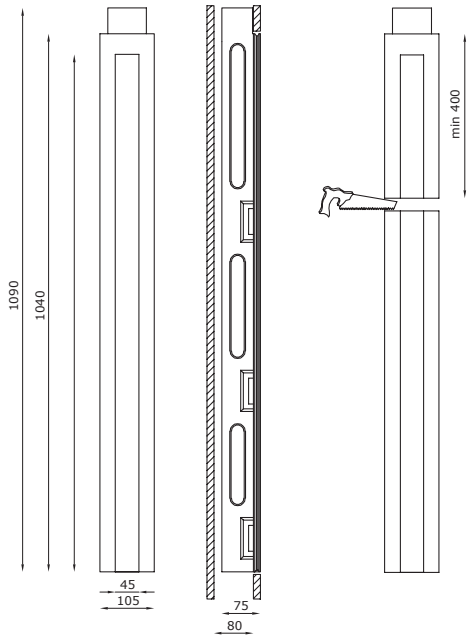

OTHER AVAILABLE CODES

6967.27.AC	<i>lens</i>	14°
	<i>light colour</i>	2700K

TECHNICAL FEATURES | ELECTRIFIED BODY

Code	6967.AC
Type	Downlight 90° I Wall recessed 90°
Material	AC: AirCoral®
Absorption capacity*	19.28 m²
Weight	6.2 Kg
Mounting	Wall and ceiling recessed
IP rating	IP40
Insulation class	III
Control gear	-
Cut out for plasterboard	1050 × 115 mm
Lamp type	LED
	Vf: 3 VDC
Lamp wattage	1 × 1W - 350 mA I 1 × 2W - 500 mA
Luminous efficacy	1 × 75 lm - 3000K 350 mA 1 × 170 lm - 3000K 500 mA
Light distribution	Narrow beam 14°
Fitting	-
Light colour	White 3000K
Light hole	370 × 45 mm
Voltage connection	By driver (optional)
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	It is possible to cut the electrified body to obtain a light hole 400 mm minimum. Other available light colours: 2700K.


OPTIONAL

ON/OFF driver	cod. H8350 cod. H8500.B I H8500.C I H8500.F
Trailing and leading edge driver	cod. DRV0000087
DALI dimmable LED driver	cod. DRV0000029
PUSH dimmable LED driver	cod. DRV0000026
Brick box	cod. BR6967LT

For further info and other available drivers please see page 474


TECHNICAL FEATURES | MODULAR BODY

Code	6961.AC
Material	AC: AirCoral®
Absorption capacity*	6.47 m²
Weight	2 Kg
IP rating	-
Cut out for plasterboard	(350 mm for each module installed) × 115 mm
Light hole	(350 mm for each module installed) × 45 mm
Note	-

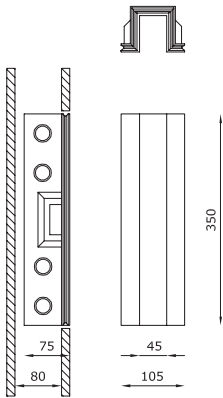

TECHNICAL FEATURES | CLOSURE HEADPARTS


Code	6962.AC
Material	AC: AirCoral®
Absorption capacity*	2.59 m²
Weight	0.7 Kg
IP rating	-
Cut out for plasterboard	115 × 115 mm
Light hole	-
Note	Supplied singularly it can be used in alternative to a further electrified body (code 6968.AC / 6967.AC) to close a continuous line of the BLADE product.




BLADE IP65
see page 433

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²


EXAMPLES OF INSTALLATION

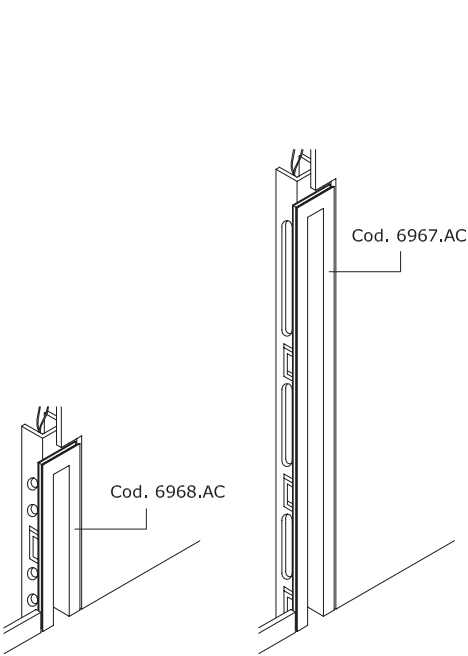


Singular module
No. 1 electrified body

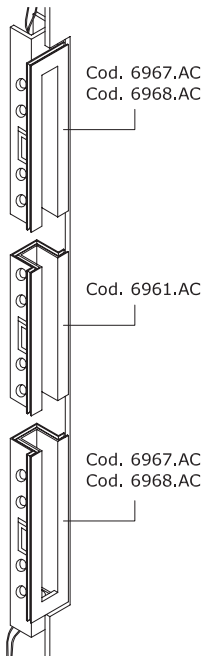


No. 2 electrified bodies in opposite position
No. 1 modular body in AirCoral®

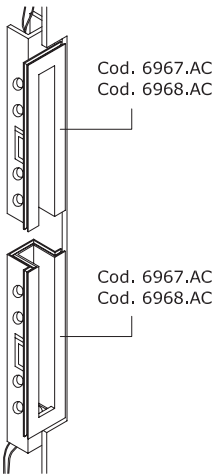

No. 2 electrified bodies
in opposite position

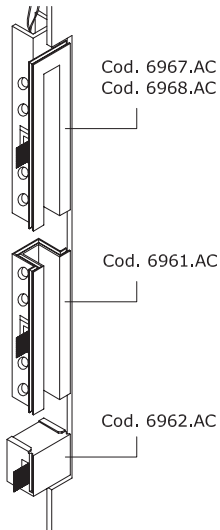

No. 1 electrified body
No. 1 modular body in AirCoral®
No. 1 closure headpart



* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²