

# BLADE IP44 / IP65




## SISTEMA MODULARE E TAGLIABILE A MISURA.

Blade IP44/IP65 è un sistema modulare a scomparsa totale in Coral WaterOut® per l'installazione a parete e soffitto di cartongesso o laterizio. Una lama di luce che fende il buio, che segna i percorsi, che determina gli spazi esterni. Blade può essere utilizzata a moduli multipli con una o due sorgenti luminose contrapposte che illuminano il corpo interno. Integrato nella parete o nel soffitto, crea scenografie luminose dal fascino unico e suggestivo.

## MODULAR SYSTEM WHICH CAN BE CUT TO MEASURE.

Blade IP44/IP65 is a totally disappearing modular system made of Coral WaterOut®, installable on plasterboard or brick walls and ceilings. A blade of light slashing the darkness, highlighting paths, defining outdoor spaces. Blade can be used in multiple modules with one or two counterposed light sources that illuminate its internal body. Integrated inside walls or ceilings, it creates bright settings with a unique and suggestive appeal.

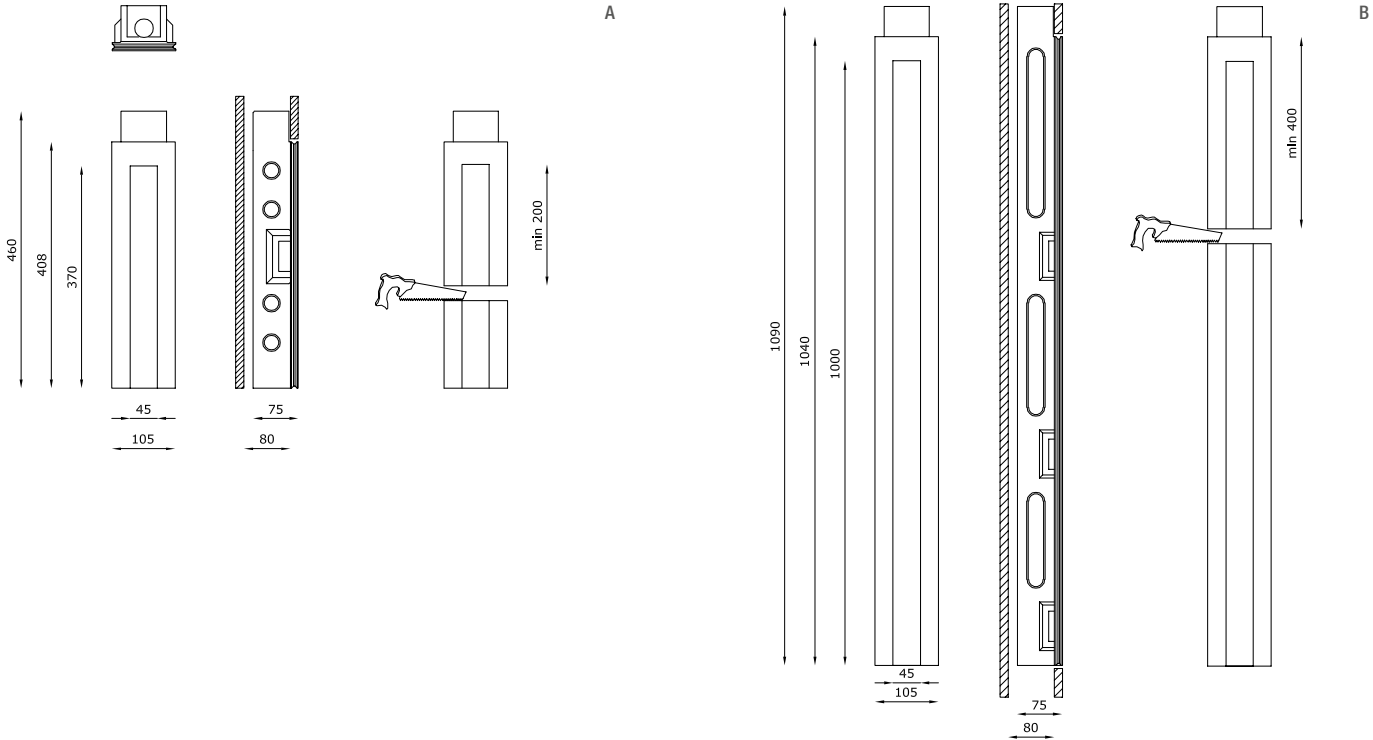

## TECHNICAL FEATURES | ELECTRIFIED BODY

Code	6965.CW (fig.A)	6966.CW (fig.B)	6987.CW (fig.A)	6988.CW (fig.B)
Type	Downlight 90°   Wall recessed 90° ▲▲▲▲	Downlight 90°   Wall recessed 90° ▲▲▲▲	Downlight 90°   Wall recessed 90° ▲▲▲▲	Downlight 90°   Wall recessed 90° ▲▲▲▲
Material	CW: Coral WaterOut®   waterproof	CW: Coral WaterOut®   waterproof	CW: Coral WaterOut®   waterproof	CW: Coral WaterOut®   waterproof
Weight	2.8 Kg	6.2 Kg	2.8 Kg	6.2 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP44	IP44	IP65	IP65
Insulation class	III	III	III	III
Control gear	Constant current electronic driver (not included)	Constant current electronic driver (not included)	Constant current electronic driver (not included)	Constant current electronic driver (not included)
Cut out for plasterboard	415 x 115 mm	1050 x 115 mm	415 x 115 mm	1050 x 115 mm
Lamp type	LED ⚡ V <sub>f</sub> : 3 VDC	LED ⚡ V <sub>f</sub> : 3 VDC	LED ⚡ V <sub>f</sub> : 3 VDC	LED ⚡ V <sub>f</sub> : 3 VDC
Lamp wattage	1W - 350 mA   2W - 500 mA	1W - 350 mA   2W - 500 mA	1W - 350 mA   2W - 500 mA	1W - 350 mA   2W - 500 mA
Luminous efficacy	75 lm - 3000K 350 mA 170 lm - 3000K 500 mA	75 lm - 3000K 350 mA 170 lm - 3000K 500 mA	75 lm - 3000K 350 mA 170 lm - 3000K 500 mA	75 lm - 3000K 350 mA 170 lm - 3000K 500 mA
Light distribution	Narrow beam 14°	Narrow beam 14°	Narrow beam 14°	Narrow beam 14°
Fitting	-	-	-	-
Light colour	White 3000K White 2700K (on request)	White 3000K White 2700K (on request)	White 3000K White 2700K (on request)	White 3000K White 2700K (on request)
Light hole	370 x 45 mm	1000 x 45 mm	370 x 45 mm	1000 x 45 mm
Voltage connection	By driver (optional)	By driver (optional)	By driver (optional)	By driver (optional)
CRI	>90	>90	>90	>90
Emergency	-	-	-	-
Energy efficiency class	A++	A++	A++	A++
Note	It is possible to cut the electrified body to obtain a light hole 200 mm minimum.  On request available dimmable PUSH or DALI, remote installation.	It is possible to cut the electrified body to obtain a light hole 400 mm minimum.  On request available dimmable PUSH or DALI, remote installation.	It is possible to cut the electrified body to obtain a light hole 200 mm minimum.  On request available dimmable PUSH or DALI, remote installation.	It is possible to cut the electrified body to obtain a light hole 400 mm minimum.  On request available dimmable PUSH or DALI, remote installation.



Optional accessories on page 446

Blade IP44 / IP65


OPTIONAL ACCESSORIES

product code	optional code	description	info
6965.CW	H8350	Constant current electronic driver	Suitable for n°1 code 6965.CW - 350 mA
	H8500.B	Constant current electronic driver. Remote installation	Suitable for n°5 code 6965.CW - 500 mA
	H8500.C	Constant current electronic driver. Remote installation	Suitable for n°2 code 6965.CW - 500 mA
	BR6965LT	Brick box	Dimensions L: 490 mm; W: 110 mm; D: 85 mm (instructions on page 502)
6966.CW	H8350	Constant current electronic driver	Suitable for n°1 code 6966.CW - 350 mA
	H8500.B	Constant current electronic driver. Remote installation	Suitable for n°5 code 6966.CW - 500 mA
	H8500.C	Constant current electronic driver. Remote installation	Suitable for n°2 code 6966.CW - 500 mA
	BR6966LT	Brick box	Dimensions L: 1120 mm; W: 110 mm; D: 85 mm (instructions on page 502)
6987.CW	H8350	Constant current electronic driver	Suitable for n°1 code 6987.CW - 350 mA
	H8500.B	Constant current electronic driver. Remote installation	Suitable for n°5 code 6987.CW - 500 mA
	H8500.C	Constant current electronic driver. Remote installation	Suitable for n°2 code 6987.CW - 500 mA
	BR6987LT	Brick box	Dimensions L: 490 mm; W: 110 mm; D: 85 mm (instructions on page 502)
6988.CW	H8350	Constant current electronic driver	Suitable for n°1 code 6988.CW - 350 mA
	H8500.B	Constant current electronic driver. Remote installation	Suitable for n°5 code 6988.CW - 500 mA
	H8500.C	Constant current electronic driver. Remote installation	Suitable for n°2 code 6988.CW - 500 mA
	BR6988LT	Brick box	Dimensions L: 1120 mm; W: 110 mm; D: 85 mm (instructions on page 502)


EXAMPLES OF INSTALLATION

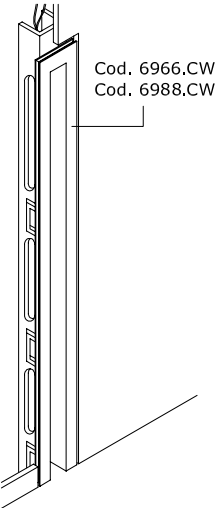


Singular module  
No. 1 electrified body

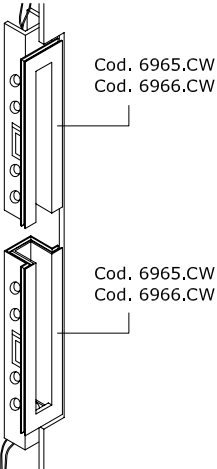


No. 2 electrified bodies  
in opposite position

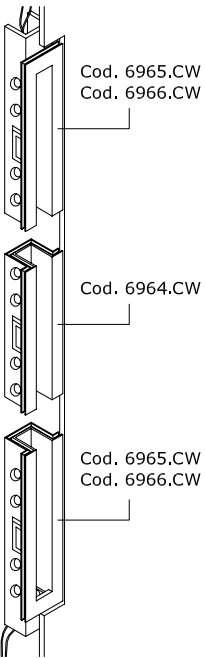


No. 2 electrified bodies  
in opposite position  
No. 1 modular body in Coral WaterOut®

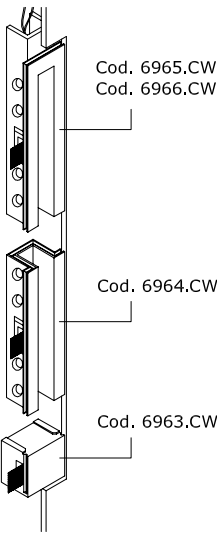

No. 1 electrified body  
No. 1 modular body in Coral WaterOut®  
No. 1 closure headpart

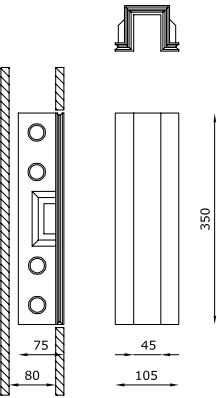

C



D

TECHNICAL FEATURES | MODULAR BODY

Code	6964.CW (fig. C)
Material	CW: Coral WaterOut® I waterproof
Weight	2 Kg
IP rating	-
Cut out for plasterboard	(350 mm for each module installed) x 115 mm
Light hole	(350 mm for each module installed) x 45 mm
Note	-

TECHNICAL FEATURES | CLOSURE HEADPARTS

Code	6963.CW (fig. D)
Material	CW: Coral WaterOut® I waterproof
Weight	0.7 Kg
IP rating	-
Cut out for plasterboard	115 x 115 mm
Light hole	-
Note	Supplied singularly it can be used in alternative to a further electrified body (code 6965.CW / 6966.CW / 6987.CW / 6988.CW) to close a continuous line of the BLADE IP44/IP65 product.



