


BUZZZ



UN GIOCO DI LUCI E OMBRE A SOFFITTO
A PLAY OF LIGHT AND SHADOWS
ON THE CEILING

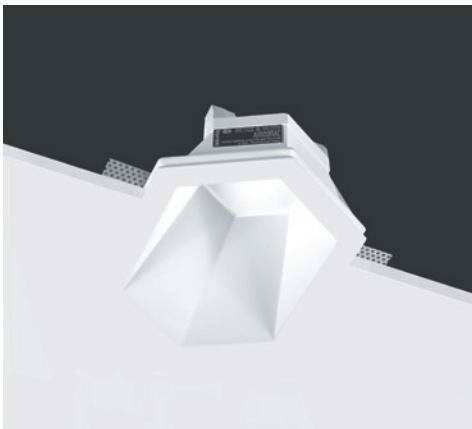

Buzzz



OTHER AVAILABLE CODES

6157.Z.27.AC	<i>lens</i>	40°
	<i>light colour</i>	2700K
6157.Z.40.AC	<i>lens</i>	40°
	<i>light colour</i>	4000K (on request)
emergency		
6158.AC 4 R 40 E _ WD	<i>lens</i>	40°
	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K (on request)
example of code composition	6158.AC 4 R 40 E 30 WD	

TECHNICAL FEATURES

Code	6157.Z.AC	6158.AC XX emergency	6155.AC
Type	Asymmetric downlight 70°	Asymmetric downlight 70°	Asymmetric downlight 70°
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	4.64 m²	4.64 m²	4.64 m²
Weight	0.9 Kg	0.9 Kg	0.9 Kg
Mounting	Ceiling recessed	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40	IP40
Insulation class	III	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included), inverter (included)	Electronic transformer (not included)
Dimensions	A: 140 mm	A: 140 mm	A: 130 mm
Cut out for plasterboard	see instructions	see instructions	see instructions
Lamp type	LED 500 mA Vf:18 VDC	LED 500 mA	QR CB 51
Lamp wattage	1 × 9W	1 × 9W	1 × 50W max
Luminous efficacy	1125 lm - 3000K	1125 lm - 3000K	-
Light distribution	Wide beam 40°	Wide beam 40°	-
Fitting	-	-	GU5.3
Light colour	White 3000K	White 3000K White 2700K 4000K (on request)	-
Light hole	210 × 140 mm	210 × 140 mm	210 × 140 mm
Voltage connection	By driver (optional)	220-240V - 50/60Hz	By driver (optional)
CRI	>90	>90	-
Emergency	-	1 hour	-
Energy efficiency class	A++	A++	A
Note	Other available light colours: 2700K, 4000K (on request).	-	On request available dimmable PUSH or DALI.

OPTIONAL

ON/OFF driver	cod. H8500.E	cod. H8500.E	-
Trailing and leading edge driver	cod. DRV0000163	cod. DRV0000163	cod. H8060.LED cod. H8060
DALI dimmable LED driver	cod. DRV0000029	cod. DRV0000029	-
PUSH dimmable LED driver	cod. DRV0000026	cod. DRV0000026	-
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000093	cod. DRV0000093	-
Kit LED dimmable	-	-	cod. 0008KIT

For further info and other available drivers please see page 474

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²



Alessandro Borghese - Il Lusso della Semplicità, Milan | Arch. A. Canelli , Arch. G. Antonelli Dudan