


ELIOS

INCASSO ROTONDO 200 mm DI DIAMETRO
ROUND RECESSED FIXTURE
OF 200 mm DIAMETER





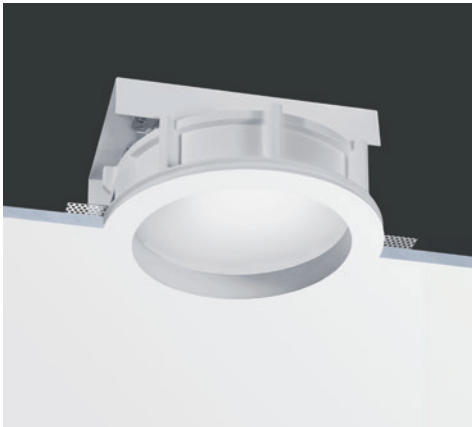

Elios



OTHER AVAILABLE CODES

6381.27.AC	<i>lens</i>	40°
	<i>light colour</i>	2700K
6381.40.AC	<i>lens</i>	40°
	<i>light colour</i>	4000K (on request)
6383.27.AC	<i>lens</i>	120°
	<i>light colour</i>	2700K
6383.40.AC	<i>lens</i>	120°
	<i>light colour</i>	4000K (on request)

TECHNICAL FEATURES

Code	6381.AC	6383.AC
Type	Downlight 90° 	Downlight 90° 
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	5.28 m²	5.28 m²
Weight	2.6 Kg	2.6 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40
Insulation class	I	I
Control gear	ON/OFF driver (included)	Dimmable constant current driver (included)
Cut out for plasterboard	Ø 270 mm	Ø 270 mm
Lamp type	LED 1050 mA 	LED 500 mA 
Lamp wattage	1 × 40W	2 × 6.5W
Luminous efficacy	1 × 4680 lm - 3000K	2 × 930 lm - 3000K
Light distribution	Wide beam 40°	Wide beam 120°
Fitting	-	-
Light colour	White 3000K	White 3000K
Light hole	Ø 200 mm	Ø 200 mm
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	-
Energy efficiency class	A++	A+
Note	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling. Other available light colours: 2700K, 4000K (on request).	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling. Trailing-edge and leading-edge dimming (20 - 100%). Other available light colours: 2700K, 4000K (on request).

OPTIONAL

Brick box	-	cod. BR6383LT
-----------	---	---------------

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²

