ELIOS

INCASSO ROTONDO 200 mm DI DIAMETRO

ROUND RECESSED FIXTURE OF 200 mm DIAMETER

Knightsbridge Hotel, London | Metis Lighting

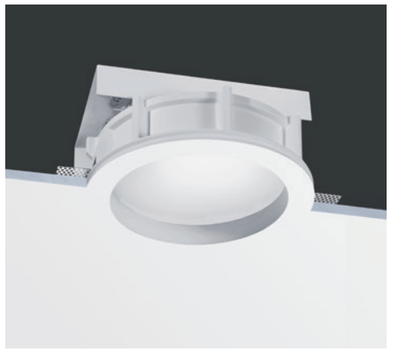



Elios

OTHER AVAILABLE CODES

6381.27.AC	*lens*	40°
	light colour	2700K
6381.40.AC	*lens*	40°
	light colour	4000K (on request)
6383.27.AC	*lens*	120°
	light colour	2700K
6383.40.AC	*lens*	120°
	light colour	4000K (on request)

TECHNICAL FEATURES

	6381.AC	**6383.AC**
Code		
Type	Downlight 90°	Downlight 90°
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	5.28 m^2	5.28 m^2
Weight	2.6 Kg	2.6 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40
Insulation class	I	I
Control gear	ON/OFF driver (included)	Dimmable constant current driver (included)
Cut out for plasterboard	Ø 270 mm	Ø 270 mm
Lamp type	LED 1050 mA	LED 500 mA
Lamp wattage	1 × 40W	2 × 6.5W
Luminous efficacy	1 × 4680 lm - 3000K	2 × 930 lm - 3000K
Light distribution	Wide beam 40°	Wide beam 120°
Fitting	-	-
Light colour	White 3000K	White 3000K
Light hole	Ø 200 mm	Ø 200 mm
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	-
Energy efficiency class	A^{++}	A^{+}
Note	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling. Other available light colours: 2700K, 4000K (on request).	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling. Trailing-edge and leading-edge dimming (20 - 100%). Other available light colours: 2700K, 4000K (on request).

OPTIONAL

Brick box	-	cod. BR6383LT

* The absorption capacity per m^3 calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m^2

BRICK BOXES

code	*compatible product*	*dimensions (L × W × D)*	*dimensions with side brackets (L × W × D)*
BR1007LT	Pixel	195 × 160 × 160 mm	
BR1018LT	Pixel IP65	195 × 160 × 160 mm	
BR1073LT	Genius Concrete	200 × 140 × 70 mm	320 × 280 × 135 mm
BR1074LT	Genius Concrete emergency	200 × 140 × 70 mm	320 × 280 × 135 mm
BR1078LT	Genius Concrete IP65	200 × 140 × 70 mm	320 × 280 × 135 mm
BR1079LT	Genius Concrete IP65 emergency	200 × 140 × 70 mm	320 × 280 × 135 mm
BR1838LT	Genius Honeycomb	195 × 160 × 140 mm	
BR1839LT	Genius Honeycomb emergency	195 × 160 × 140 mm	
BR1846LT	Geniusquare IP65	195 × 160 × 140 mm	
BR1851LT	Genius	195 × 160 × 140 mm	
BR1852LT	Twin Genius	290 × 160 × 140 mm	
BR1853LT	Geniusquare	195 × 160 × 140 mm	
BR1854LT	Twin Geniusquare	290 × 160 × 140 mm	
BR1855LT	Genius emergency	195 × 160 × 140 mm	
BR1856LT	Geniusquare emergency	195 × 160 × 140 mm	
BR1857LT	Twin Genius emergency	290 × 160 × 140 mm	
BR1858LT	Twin Geniusquare emergency	290 × 160 × 140 mm	
BR1860LT	Geniusquare IP65 emergency	195 × 160 × 140 mm	
BR1861LT	Genius Brass	195 × 160 × 140 mm	
BR1862LT	Genius Brass emergency	195 × 160 × 140 mm	
BR1865LT	Genius Basic Slope	290 × 160 × 140 mm	
BR1866LT	Genius Basic Slope emergency	195 × 160 × 160 mm	
BR1869LT	Geniuscurve IP65	195 × 160 × 160 mm	
BR1870LT	Geniuscurve IP65 emergency	195 × 160 × 140 mm	
BR1871LT	Genius Black	195 × 160 × 140 mm	
BR1872LT	Genius Black emergency	195 × 160 × 140 mm	
BR1874LT	Genius Kelvin	195 × 160 × 140 mm	
BR1875LT	Genius Dim To Warm	195 × 160 × 140 mm	
BR1881LT	Genius Dynamic White	195 × 160 × 140 mm	
BR1885LT	Genius Basic	195 × 105 × 110 mm	
BR1886LT	Genius Basic emergency	195 × 105 × 110 mm	
BR1887LT	Genius Basic Flat	195 × 105 × 110 mm	
BR1888LT	Genius Basic Flat emergency	195 × 105 × 110 mm	
BR1891LT	Genius Curve	195 × 160 × 140 mm	
BR1892LT	Genius Curve emergency	195 × 160 × 140 mm	
BR1895LT	Geniusquare Brass	195 × 160 × 140 mm	
BR1896LT	Geniusquare Brass emergency	195 × 160 × 140 mm	
BR1951LT	Genius IP65	195 × 160 × 140 mm	
BR1952LT	Genius IP65 emergency	195 × 160 × 140 mm	
BR1985LT	Genius Basic IP65	195 × 105 × 110 mm	
BR1986LT	Genius Basic IP65 emergency	195 × 105 × 110 mm	
BR3111LT	Basic Sqaure	195 × 150 × 165 mm	
BR3112LT	Basic Square	195 × 150 × 165 mm	
BR3113LT	Basic Square	195 × 150 × 165 mm	
BR3115LT	Basic Square Dim To Warm	195 × 150 × 165 mm	
BR3121LT	Basic Round	195 × 150 × 165 mm	
BR3122LT	Basic Round	195 × 150 × 165 mmmm	

BRICK BOXES

code	*compatible product*	*dimensions (L × W × D)*	*dimensions with side brackets (L × W × D)*
BR3123LT	Basic Round	195 × 150 × 165 mm	
BR3125LT	Basic Round Dim To Warm	195 × 150 × 165 mm	
BR4421LT	Lys	195 × 160 × 160 mm	
BR4422LT	Bild	195 × 160 × 160 mm	
BR4423LT	Bild	195 × 160 × 160 mm	
BR4424LT	Bild	195 × 160 × 160 mm	
BR4425LT	Lys	195 × 160 × 160 mm	
BR4426LT	Lys	195 × 160 × 160 mm	
BR4432LT	Rim	195 × 160 × 160 mm	
BR4433LT	Rim	195 × 160 × 160 mm	
BR4434LT	Rim	195 × 160 × 160 mm	
BR5388LT	Oris IP655	445 × 270 × 225 mm	
BR5481LT	Idrout IP65	165 × 160 × 160 mm	
BR5483LT	Idrout IP65	165 × 160 × 160 mm	
BR5485LT	Idrout IP65 Dim To Warm	165 × 160 × 160 mm	
BR5489LT	Idrout IP65 emergency	165 × 160 × 160 mm	
BR5591LT	Idroround IP65	165 × 160 × 160 mm	
BR5593LT	Idroround IP65	165 × 160 × 160 mm	
BR5595LT	Idroround IP65 Dim To Warm	165 × 160 × 160 mm	
BR5599LT	Idroround IP65 emergency	165 × 160 × 160 mm	
BR6051LT	Tekno	570 × 170 × 160 mm	
BR6052LT	Tekno	570 × 170 × 160 mm	
BR6161LT	Focus	195 × 160 × 160 mm	
BR6162LT	Focus	195 × 160 × 160 mm	
BR6163LT	Focus	195 × 160 × 160 mm	
BR6169LT	Focus emergency	195 × 160 × 160 mm	
BR6213LT	Ecla emergency	195 × 160 × 160 mm	
BR6215LT	Ecla Dim To Warm	195 × 160 × 160 mm	
BR6216LT	Nefi Dim To Warm	195 × 160 × 160 mm	
BR6218LT	Nefi	195 × 160 × 160 mm	
BR6219LT	Nefi emergency	195 × 160 × 160 mm	
BR6238LT	Ring	195 × 160 × 160 mm	
BR6239LT	Ring emergency	195 × 160 × 160 mm	
BR6241LT	Jacobox	195 × 160 × 160 mm	
BR6243LT	Ring	195 × 160 × 160 mm	
BR6244LT	Jacobox	195 × 160 × 160 mm	
BR6248LT	Jacobox	195 × 160 × 160 mm	
BR6249LT	Jacobox emergency	195 × 160 × 160 mm	
BR6252LT	Spirit	445 × 310 × 160 mm	
BR6253LT	Ring	195 × 160 × 160 mm	
BR6256LT	Spirit	445 × 310 × 160 mm	
BR6259LT	Spirit	445 × 310 × 160 mm	
BR6261LT	Nefi	195 × 160 × 160 mm	
BR6262LT	Nefi	195 × 160 × 160 mm	
BR6263LT	Ecla	195 × 160 × 160 mm	
BR6265LT	Ecla	195 × 160 × 160 mm	
BR6268LT	Ecla	195 × 160 × 160 mm	

BRICK BOXES

code	*compatible product*	*dimensions (L × W × D)*	*dimensions with side brackets (L × W × D)*
BR6283LT	Nimbus	445 × 250 × 180 mm	
BR6312LT	Ring Dim To Warm	195 × 160 × 160 mm	
BR6313LT	Bilight	230 × 150 × 160 mm	
BR6315LT	Bilight Dim To Warm	230 × 150 × 160 mm	
BR6316	Jacobox Dim To Warm	195 × 160 × 160 mm	
BR6318LT	Bilight	230 × 150 × 160 mm	
BR6323LT	Monolight	195 × 160 × 160 mm	
BR6325LT	Monolight Dim To Warm	195 × 160 × 160 mm	
BR6328LT	Monolight	195 × 160 × 160 mm	
BR6333LT	Ghost	550 × 160 × 85 mm	
BR6358LT	Lentil	260 × 120 × 100 mm	
BR6383LT	Elios	445 × 270 × 225 mm	
BR6487LT	Phantom IP65	340 × 120 × 80 mm	
BR6488LT	Phantom	340 × 120 × 80 mm	
BR6489LT	Phantom IP65	340 × 120 × 80 mm	
BR6498LT	Eggy	195 × 150 × 200 mm	
BR6967LT	Blade	1120 × 110 × 85 mm	
BR6968LT	Blade	490 × 110 × 85 mm	
BR6987LT	Blade IP65	490 × 110 × 85 mm	
BR6988LT	Blade IP65	1120 × 110 × 85 mm	

General Information Accessories