



ELLISSE



Bauta Ellisse

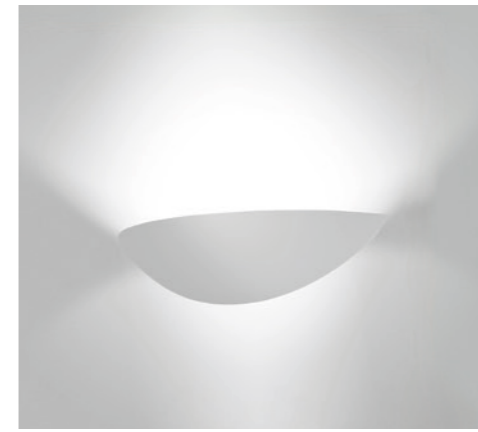

OTHER AVAILABLE CODES

7488.27.AC	<i>lens</i>	120°
	<i>light colour</i>	2700K



TECHNICAL FEATURES

Code	7488.AC	7481.AC	7483.83.AC
Type	Wall lamp	Wall lamp	Wall lamp
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	10.34 m²	10.34 m²	10.34 m²
Mounting	Wall mounting	Wall mounting	Wall mounting
IP rating	IP40	IP20	IP40
Insulation class	I	I	I
Control gear	Dimmable constant current driver (included)	-	-
Lamp type	LED 500 mA 	A 60 	QT-DE12
Lamp wattage	2 × 6.5W	1 × 100W max	1 × 200W max
Luminous efficacy	2 × 930 lm - 3000K	-	-
Light distribution	Wide beam 120°	-	-
Fitting	-	E27	R7s
Light colour	White 3000K	-	-
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	-	-
Emergency	-	-	-
Energy efficiency class	A+	A+	A
Note	Trailing-edge and leading-edge dimming (20 - 100%). Satin glass included. Other available light colours: 2700K, 4000K (on request).	-	-


LAMPADA A PARETE, LUCE INDIRECTA, MOLTEPLICI MISURE

WALL LAMP, INDIRECT LIGHT, VARIOUS SIZES

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²

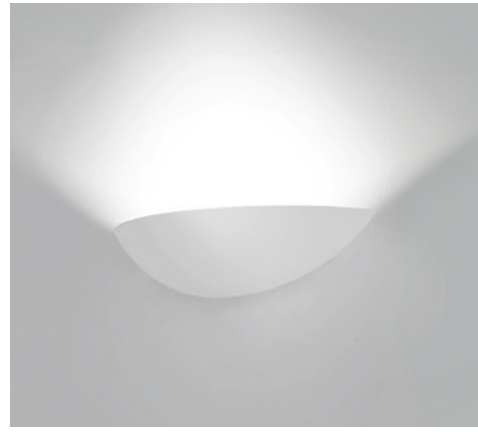

Ellisse 450

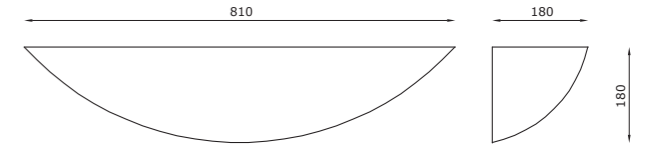

Ellisse 810




TECHNICAL FEATURES

Code	7428.AC	7421.AC	7423.23.AC
Type	Wall lamp	Wall lamp	Wall lamp
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	10.34 m ²	10.34 m ²	10.34 m ²
Mounting	Wall mounting	Wall mounting	Wall mounting
IP rating	IP40	IP20	IP40
Insulation class	I	I	I
Control gear	Dimmable constant current driver (included)	-	-
Lamp type	LED 500 mA 	A 60 	QT-DE12
Lamp wattage	1 × 6.5W	1 × 100W max	1 × 200W max
Luminous efficacy	1 × 930 lm - 3000K	-	-
Light distribution	Wide beam 120°	-	-
Fitting	-	E27	R7s
Light colour	White 3000K	-	-
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	-	-
Emergency	-	-	-
Energy efficiency class	A+	A+	A
Note	Trailing-edge and leading-edge dimming (20 - 100%). Satin glass included. Other available light colours: 2700K (on request), 4000K (on request).	-	-


TECHNICAL FEATURES

Code	7448.AC	7411.AC	7413.AC
Type	Wall lamp	Wall lamp	Wall lamp
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	22.26 m ²	22.26 m ²	22.26 m ²
Mounting	Wall mounting	Wall mounting	Wall mounting
IP rating	IP20	IP20	IP20
Insulation class	I	I	I
Control gear	Dimmable constant current driver (included)	-	-
Lamp type	LED 500 mA 	A 60 	QT-DE12
Lamp wattage	1 × 12.5W	100W max	200W max
Luminous efficacy	1 × 1620 lm - 3000K	-	-
Light distribution	Wide beam 120°	-	-
Fitting	-	E27	R7s
Light colour	White 3000K	-	-
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>80	-	-
Emergency	-	-	-
Energy efficiency class	A+	A+	A+
Note	Trailing-edge and leading-edge dimming (20 - 100%). Other available light colours: 2700K (on request), 4000K (on request).	-	-

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²

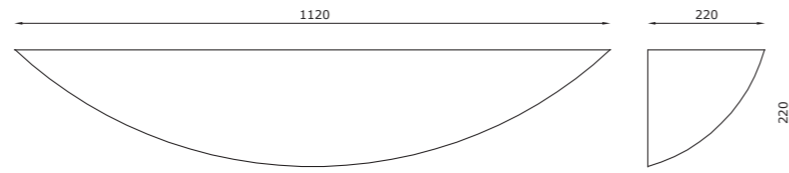

Ellisse 1120



Ellisse Base



TECHNICAL FEATURES

	7438.AC	7403.3.AC
Code	7438.AC	7403.3.AC
Type	Wall lamp	Wall lamp
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	38.62 m²	38.62 m²
Mounting	Wall mounting	Wall mounting
IP rating	IP20	IP20
Insulation class	I	I
Control gear	Dimmable constant current driver (included)	-
Lamp type	LED 500 mA ☞	QT-DE12 ☞
Lamp wattage	2 × 12.5W	2 × 200W max
Luminous efficacy	2 × 1620 lm - 3000K	-
Light distribution	Wide beam 120°	-
Fitting	-	R7s
Light colour	White 3000K	-
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>80	-
Emergency	-	-
Energy efficiency class	A+	A+
Note	Installation for indirect light. Other available light colours: 2700K (on request), 4000K (on request).	Installation for direct light.

TECHNICAL FEATURES

	7442.00
Code	7442.00
Type	Wall lamp
Material	00: Coral®
Mounting	Wall mounting
IP rating	IP20
Insulation class	I
Control gear	-
Lamp type	QT-DE12 ☞
Lamp wattage	1 × 150W max
Luminous efficacy	-
Light distribution	-
Fitting	R7s
Light colour	-
Voltage connection	220-240V · 50/60Hz
CRI	-
Emergency	-
Energy efficiency class	A
Note	-

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²