


IDROUT IP65

INCASSO IP65
CON SORGENTE LUMINOSA A VISTA
RECESSED IP65-RATED FIXTURE
WITH VISIBLE LIGHT SOURCE



Idrout IP65

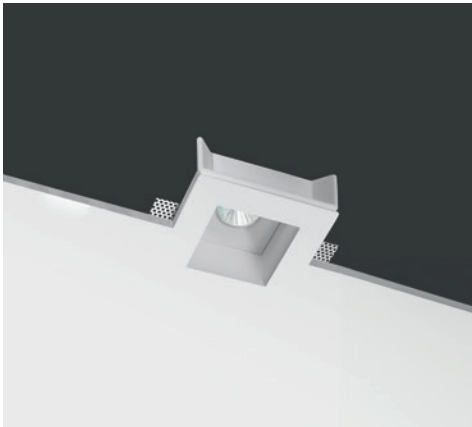

OTHER AVAILABLE CODES

5483.Z.27.CW	<i>lens</i>	40°
	<i>light colour</i>	2700K
5483.Z.40.CW	<i>lens</i>	40°
	<i>light colour</i>	4000K (on request)
emergency		
5489.CW 4 R 40 E _ WD	<i>lens</i>	40°
	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K
example of code composition	5489.CW 4 R 40 E 30 WD	


TECHNICAL FEATURES


Code	5483.Z.CW	5489.CW XX emergency	5481.CW
Type	Downlight 90°	Downlight 90°	Downlight 90°
Material	CW: Coral WaterOut® I waterproof	CW: Coral WaterOut® I waterproof	CW: Coral WaterOut® I waterproof
Weight	1.1 Kg	1.1 Kg	1.1 Kg
Mounting	Ceiling recessed	Ceiling recessed	Ceiling recessed
IP rating	IP65	IP65	IP65
Insulation class	III	III	III
Control gear	Constant current electronic driver (not included)	Constant current electronic driver (not included), inverter (included)	Electronic transformer (not included)
Dimensions	A: 150 mm	A: 150 mm	A: 130 mm
Cut out for plasterboard	160 × 160 mm	160 × 160 mm	160 × 160 mm
Lamp type	LED 500 mA	LED 500 mA	QR CB 51
	Vf: 18 VDC	Vf: 18 VDC	
Lamp wattage	1 × 9W	1 × 9W	1 × 50W max
Luminous efficacy	1 × 1125 lm - 3000K	1 × 1125 lm - 3000K	-
Light distribution	Wide beam 40°	Wide beam 40°	-
Fitting	-	-	GU5.3
Light colour	White 3000K	White 3000K White 2700K I 4000K (on request)	-
Light hole	90 × 90 mm	90 × 90 mm	90 × 90 mm
Voltage connection	By driver (optional)	220-240V - 50/60Hz	By driver (optional)
CRI	>90	>90	-
Emergency	-	1 hour	-
Energy efficiency class	A++	A++	A
Note	Other available light colours: 2700K, 4000K.	-	-

OPTIONAL


ON/OFF driver	cod. H8500.E	cod. H8500.E	-
Trailing and leading edge driver	-	-	cod. H8060.LED
DALI dimmable LED driver	cod. DRV0000029	cod. DRV0000029	-
PUSH dimmable LED driver	cod. DRV0000026	cod. DRV0000026	-
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000094	cod. DRV0000094	-
Kit LED dimmable	-	-	cod. 0008KIT
Brick box	cod. BR5483LT	-	cod. BR5481LT

For further info and other available drivers please see page 474



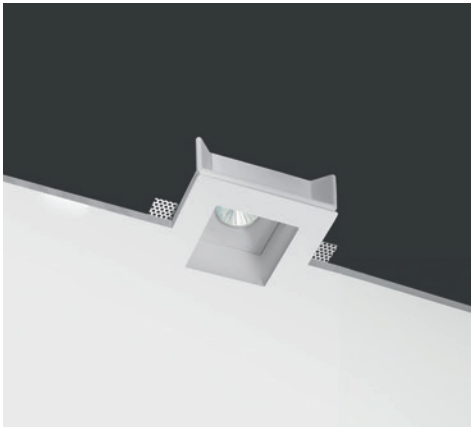

Idrout IP65 Dim to Warm



TECHNICAL FEATURES

Code	5485.CW 4 R 40 E 98 WD
Type	Downlight 90°
	
Material	CW: Coral WaterOut® waterproof
Weight	1.1 Kg
Mounting	Ceiling recessed
IP rating	IP65
Insulation class	III
Control gear	Remote ON/OFF driver** (not included)
Dimensions	A: 150 mm
Cut out for plasterboard	160 × 160 mm
Lamp type	LED 350 mA
	VI: 17 VDC
Lamp wattage	1 × 6W
Luminous efficacy	1 × 600 lm (from 1800K up to 3000K)
Light distribution	Wide beam 40°
Fitting	-
Light colour	Dimming range 1800/3000K
Light hole	90 × 90 mm
Voltage connection	By driver (optional)
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	**Idrout IP65 Dim to Warm requires dimming: amplitude (AM) dim to warm wide range input voltage.

OPTIONAL

Amplitude DALI dimmable LED driver	H8350DA.AM
Amplitude PUSH dimmable LED driver	H8350PH.AM
Brick box	cod. BR5485LT

For further info and other available drivers please see page 474



Private Villa, Mexico | Ogarrio Zapata Arquitectos | Interior Ocho