


INVISIBLE

INCASSO A PARETE E SOFFITTO
CON VETRO A FILO
WALL AND CEILING RECESSED FIXTURE
WITH FLUSH GLASS



Invisible

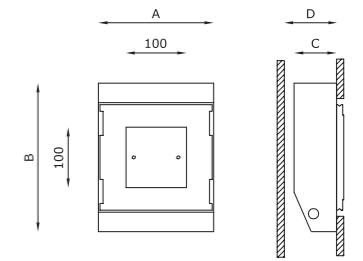


OTHER AVAILABLE CODES

6133.Z.27.AC	<i>lens</i>	40°
	<i>light colour</i>	2700K
6133.Z.40.AC	<i>lens</i>	40°
	<i>light colour</i>	4000K (on request)
emergency		
6139.AC 4 R 40 E _ WD	<i>lens</i>	40°
	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K (on request)
example of code composition		6139.AC 4 R 40 E 30 WD

TECHNICAL FEATURES

Code	6133.Z.AC	6139.AC XX emergency
Type	Downlight 90° Wall recessed 90°	Downlight 90° Wall recessed 90°
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	2.3 m²	2.3 m²
Weight	1.5 Kg	2.5 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP40	IP40
Insulation class	III	III
Control gear	ON/OFF driver (included)	ON/OFF driver (included)
Dimensions	A: 190mm; B: 245mm; C: 70mm; D: 80mm	A: 190mm; B: 350mm; C: 70mm; D: 80mm
Cut out for plasterboard	195 × 185 mm	195 × 250 mm
Lamp type	LED 500 mA 	LED 500 mA
Lamp wattage	1 × 9W	1 × 9W
Luminous efficacy	1 × 1125 lm - 3000K	1 × 1125 lm - 3000K
Light distribution	Wide beam 40°	Wide beam 40°
Fitting	-	-
Light colour	White 3000K	White 3000K White 2700K 4000K (on request)
Light hole	100 × 100 mm	100 × 100 mm
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	Extra white satin glass fixed by screws on wall/ceiling level. On request available dimmable PUSH or DALI. Other available light colours: 2700K, 4000K (on request).	Extra white satin glass fixed by screws on wall/ceiling level.

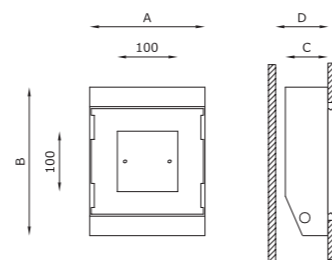

Invisibile



TECHNICAL FEATURES

	6131.AC	6132.AC
Code	6131.AC	6132.AC
Type	Downlight 45° Wall recessed 45°	Downlight 90° Wall recessed 90°
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	2.3 m²	2.3 m²
Weight	1.5 Kg	1.5 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP40	IP40
Insulation class	III	III
Control gear	Dimmable electronic transformer (included)	Dimmable electronic transformer (included)
Dimensions	A: 190mm; B: 245mm; C: 70mm; D: 80mm	A: 190mm; B: 245mm; C: 70mm; D: 80mm
Cut out for plasterboard	195 × 185 mm	195 × 185 mm
Lamp type	QR CB 51	QR CB 51
Lamp wattage	1 × 50W max	1 × 50W max
Luminous efficacy	-	-
Light distribution	-	-
Fitting	GU5.3	GU5.3
Light colour	-	-
Light hole	100 × 100 mm	100 × 100 mm
Voltage connection	220-240V / 12V · 50/60Hz	220-240V / 12V · 50/60Hz
CRI	-	-
Emergency	-	-
Energy efficiency class	A	A
Note	Extra white satin glass fixed by screws on wall/ceiling level.	Extra white satin glass fixed by screws on wall/ceiling level.

OPTIONAL

Kit LED dimmable	cod. 0008KIT	cod. 0008KIT
------------------	--------------	--------------

For further info and other available drivers please see page 474



Private Villa, Rome | OmniDe Architecture | ph. Le Michette Creative Studio