


# LEAF



LA PARETE SI PLASMA ALLA LUCE  
THE WALL MOLDS TO THE LIGHT

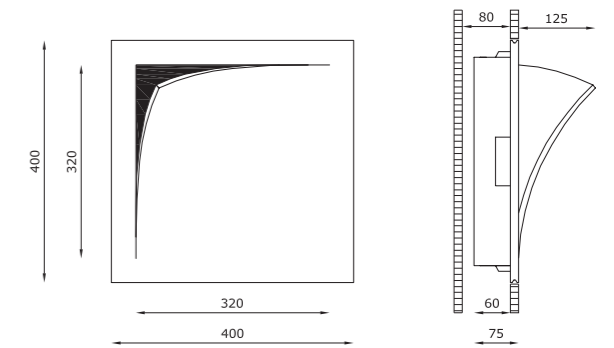

## Leaf



### OTHER AVAILABLE CODES

2988.27.AC	<i>lens</i>	120°
	<i>light colour</i>	2700K
2988.40.AC	<i>lens</i>	120°
	<i>light colour</i>	4000K (on request)
2988.AC 2 00 E	<i>lens</i>	120°
	<i>dim. tech.</i>	
	<b>1</b>	1-10V
	<b>DA</b>	DALI
	<i>light colour</i>	
	<b>27</b>	2700K
	<b>30</b>	3000K
	<b>40</b>	4000K (on request)

example of code composition  
2988.AC 2 00 E **30 DA**

### TECHNICAL FEATURES

Code	<b>2988.AC</b>
Type	Wall and ceiling half recessed
Material	AC: AirCoral®
Absorption capacity*	26.2 m²
Weight	9.2 Kg
Mounting	Wall and ceiling mounting
IP rating	IP20
Insulation class	I
Control gear	Dimmable constant current driver (included)
Cut out for plasterboard	410 x 410 mm
Lamp type	LED 500mA ⊞
Lamp wattage	1 x 6.5W
Luminous efficacy	1 x 930 lm - 3000K
Light distribution	Wide beam 120°
Fitting	-
Light colour	White 3000K
Light hole	-
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	-
Energy efficiency class	A+
Note	Trailing-edge and leading-edge dimming (20 - 100%).  Other available type of dimming: 1-10V, DALI.  Other available light colours: 2700K, 4000K (on request).

\* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²



Private Villa, Dubai | ASZ Architetti



Alessandro Borghese - Il Lusso della Semplicità, Venice | Arch. A. Canelli | ph. Le Michette Creative Studio



Private Villa, Pavia | ASZ Architetti | ph. T. Pagani