



LYS

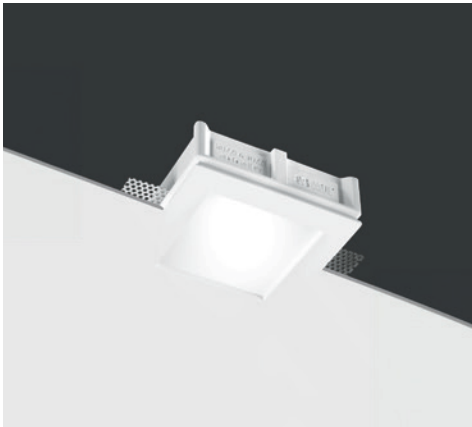

Lys



OTHER AVAILABLE CODES

4426.Z.27.00	<i>lens</i>	40°
	<i>light colour</i>	2700K

TECHNICAL FEATURES

Code	4426.Z.00	4421.00	4425.00
Type	Downlight 90°	Downlight 90°	Downlight 90°
Material	00: Coral®	00: Coral®	00: Coral®
Weight	0.9 Kg	0.8 Kg	0.85 Kg
Mounting	Ceiling recessed	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40	IP40
Insulation class	III	III	I
Control gear	Remote constant current electr. driver (not included)	Electronic transformer (not included)	-
Dimensions	A: 100 mm; B: 130 mm	A: 90 mm; B: 120 mm	A: 100 mm; B: 130 mm
Cut out for plasterboard	155 × 155 mm	155 × 155 mm	155 × 155 mm
Lamp type	LED 500 mA	QR CB 51	QPAR 16
	Vf: 18 VDC		
Lamp wattage	1 × 9W	1 × 50W max	1 × 50W max
Luminous efficacy	1 × 1125 lm - 3000K	-	-
Light distribution	Wide beam 40°	-	-
Fitting	-	GU5.3	GU10
Light colour	White 3000K	-	-
Light hole	100 × 100 mm	100 × 100 mm	100 × 100 mm
Voltage connection	By driver (optional)	By driver (optional)	220-240V - 50/60Hz
CRI	>90	-	-
Emergency	-	-	-
Energy efficiency class	A++	A++	A++
Note	Extra white satin glass. Frosted glass recessed 5 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 5 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 5 mm into the ceiling.

Other available light colours:
2700K,
4000K.

OPTIONAL

ON/OFF driver	cod. H8500.E	-	-
Trailing and leading edge driver	cod. DRV0000163	cod. H8060.LED	-
DALI dimmable LED driver	cod. DRV0000029	-	-
PUSH dimmable LED driver	cod. DRV0000026	-	-
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000093	-	-
Kit LED dimmable	-	cod. 0008KIT	cod. 0009KIT
Brick box	cod. BR4426LT	cod. BR4421LT	cod. BR4425LT

For further info and other available drivers please see page 474

INCASSO CON FORO EMISSIONE LUCE
DL 100 × 100 mm E VETRO SATINATO
RETROCESSO

RECESSED FIXTURE WITH 100 × 100 mm
LIGHT EMISSION HOLE WITH RETRACTED
SATIN GLASS