



MAXIMAL



LAMPADA A PARETE, LUCE INDIRECTA
WALL LAMP, INDIRECT LIGHT

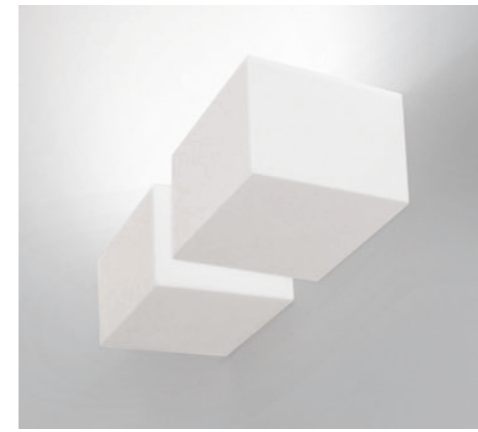

Maximal

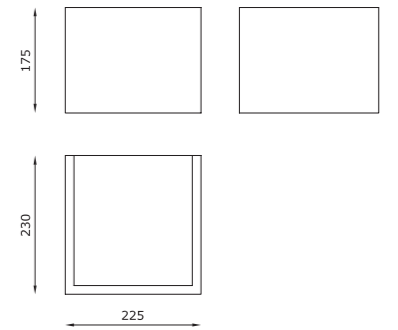

OTHER AVAILABLE CODES

| | | |
|------------|---------------------|-------|
| 2718.27.AC | <i>lens</i> | 120° |
| | <i>light colour</i> | 2700K |

TECHNICAL FEATURES

| Code | 2718.AC | 2713.AC |
|-------------------------|-------------------------------------|--------------------|
| Type | Wall lamp | Wall lamp |
| Material | AC: AirCoral® | AC: AirCoral® |
| Absorption capacity* | 12.29 m² | 12.29 m² |
| Mounting | Wall mounting | Wall mounting |
| IP rating | IP20 | IP40 |
| Insulation class | I | I |
| Control gear | - | - |
| Lamp type | LED | QT-DE12 |
| Lamp wattage | 1 × 18W | 1 × 200W max |
| Luminous efficacy | 1 × 1300 lm - 3000K | - |
| Light distribution | Wide beam 120° | - |
| Fitting | - | R7s |
| Light colour | White 3000K | - |
| Voltage connection | 220-240V · 50/60Hz | 220-240V · 50/60Hz |
| CRI | - | - |
| Emergency | - | - |
| Energy efficiency class | A++ | A |
| Note | Phase cutting dimmable (20 - 100%). | - |

Other available light colours:
2700K,
4000K (on request).