



# MINI SECRET

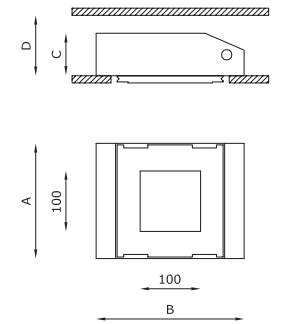

## Mini Secret

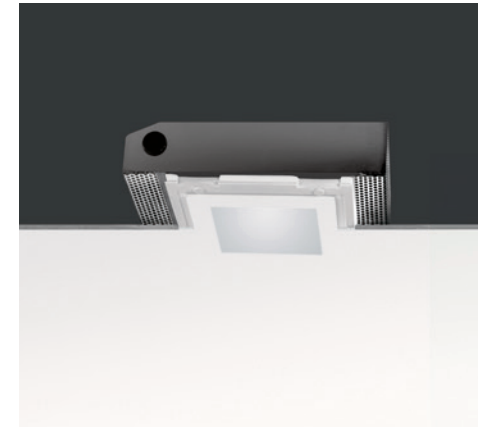

### OTHER AVAILABLE CODES

6143.Z.27.AC	lens	40°
	light colour	2700K
6143.Z.40.AC	lens	40°
	light colour	4000K (on request)
<b>emergency</b>		
6149.AC 4 R 40 E _ WD	lens	40°
	light colour	
	27	2700K
	30	3000K
	40	4000K (on request)
example of code composition		6149.AC 4 R 40 E 30 WD

### TECHNICAL FEATURES

Code	6143.Z.AC	6149.AC XX emergency	6141.AC	6142.AC
Type	Downlight 90°	Downlight 90°	Downlight 45°	Downlight 90°
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	2.3 m²	2.3 m²	2.3 m²	2.3 m²
Weight	1.5 Kg	2.5 Kg	1.5 Kg	1.5 Kg
Mounting	Ceiling recessed	Ceiling recessed	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40	IP40	IP40
Insulation class	III	III	III	III
Control gear	Constant current electronic driver (included)	Constant current electronic driver (included)	Dimmable electronic transformer (included)	Dimmable electronic transformer (included)
Dimensions	A: 190mm; B: 245mm; C: 70mm; D: 80mm	A: 190mm; B: 350mm; C: 70mm; D: 80mm	A: 190mm; B: 245mm; C: 70mm; D: 80mm	A: 190mm; B: 245mm; C: 70mm; D: 80mm
Cut out for plasterboard	195 × 185 mm	195 × 250 mm	195 × 185 mm	195 × 185 mm
Lamp type	LED 350 mA	LED 350 mA	QR CB 51	QR CB 51
Lamp wattage	1 × 9W	1 × 9W	1 × 50W max	1 × 50W max
Luminous efficacy	1 × 1125 lm - 3000K	1 × 1125 lm - 3000K	-	-
Light distribution	Wide beam 40°	Wide beam 40°	-	-
Fitting	-	-	GU5.3	GU5.3
Light colour	White 3000K	White 3000K White 2700K I 4000K (on request)	-	-
Light hole	100 × 100 mm	100 × 100 mm	100 × 100 mm	100 × 100 mm
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V / 12V · 50/60Hz	220-240V / 12V · 50/60Hz
CRI	>90	>90	-	-
Emergency	-	1 hour	-	-
Energy efficiency class	A++	A++	A	A
Note	Extra white satin glass leaned on ceiling level. On request available dim. PUSH or DALI. Other available light colours: 2700K, 4000K (on request).	Extra white satin glass leaned on ceiling level.	Extra white satin glass leaned on ceiling level.	Extra white satin glass leaned on ceiling level.

### OPTIONAL

Kit LED dimmable	-	-	cod. 0008KIT.E	cod. 0008KIT
------------------	---	---	----------------	--------------

For further info and other available drivers please see page 474

INCASSO QUADRATO A SOFFITTO  
CON VETRO A FILO  
SQUARE CEILING RECESSED FIXTURE  
WITH FLUSH GLASS