



MINIMAL



LAMPADA A PARETE, LUCE INDIRETTA
WALL LAMP, INDIRECT LIGHT

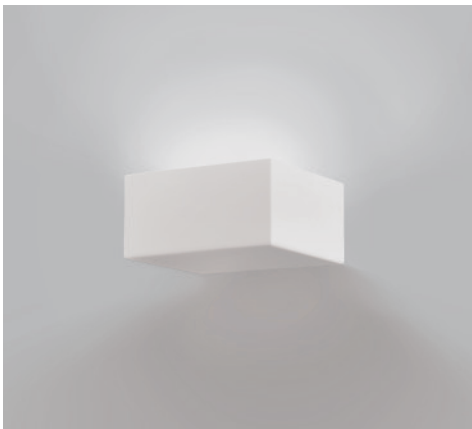

Minimal



OTHER AVAILABLE CODES

2938.27.AC	<i>lens</i>	120°
	<i>light colour</i>	2700K

TECHNICAL FEATURES

Code	2938.AC	2932.AC
Type	Wall lamp	Wall lamp
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	4.29 m²	4.29 m²
Mounting	Wall mounting	Wall mounting
IP rating	IP20	IP20
Insulation class	I	I
Control gear	-	-
Lamp type	LED	QT-DE12 (75 mm)
Lamp wattage	1 × 18W	1 × 150W max
Luminous efficacy	1 × 1300 lm - 3000K	-
Light distribution	Wide beam 120°	-
Fitting	-	R7s
Light colour	White 3000K	-
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	-	-
Emergency	-	-
Energy efficiency class	A++	A
Note	Phase cutting dimmable (20 - 100%).	-
	Other available light colours: 2700K, 4000K (on request).	

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²