


# MINIVIRTUS IP65





## Minivirtus IP65

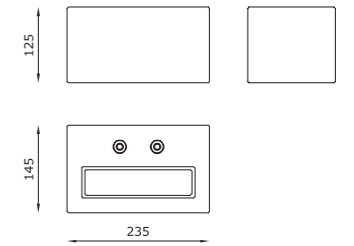

### OTHER AVAILABLE CODES


3046.27.DC	<i>lens</i>	120°
	<i>light colour</i>	2700K

### TECHNICAL FEATURES

Code	<b>3046.DC</b>
Type	Wall lamp
	
Material	DC: DurCoral®
Weight	4.7 Kg
Mounting	Wall mounting
IP rating	IP65
Insulation class	I
Control gear	Constant voltage LED driver (included)
Lamp type	LED 24V
	
Lamp wattage	2 × 10W
Luminous efficacy	2 × 1400 lm - 3000K
Light distribution	Wide beam 120°
Fitting	-
Light colour	White 3000K
Light hole	-
Voltage connection	220-240V · 50/60Hz
CRI	>80
Emergency	-
Energy efficiency class	A++
Note	Extra white frosted glass diffuser. Aluminum reflector.
	Other available light colours: 2700K, 4000K (on request).

LAMPADA A PARETE IN DURCORAL®, LUCE DIRETTA  
E BI-EMISSIONE, PITTURABILE, INERTE AL SALE E AL CLORO

WALL LAMP MADE OF DURCORAL®, DIRECT  
OR BI-EMISSION LIGHT, PAINTABLE, SALT  
AND CHLORINE INERT

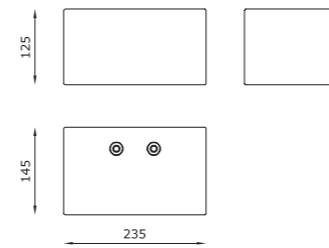

### Minivirtus Direct IP65



#### OTHER AVAILABLE CODES

3078.27.DC	<i>lens</i>	120°
	<i>light colour</i>	2700K

#### TECHNICAL FEATURES

Code	<b>3078.DC</b>
Type	Wall lamp
Material	DC: DurCoral®
Weight	5 Kg
Mounting	Wall mounting
IP rating	IP65
Insulation class	I
Control gear	Constant voltage LED driver (included)
Lamp type	LED 24V
Lamp wattage	1 × 10W
Luminous efficacy	1 × 1400 lm
Light distribution	Wide beam 120°
Fitting	-
Light colour	White 3000K
Light hole	-
Voltage connection	220-240V · 50/60Hz
CRI	>80
Emergency	-
Energy efficiency class	A++
Note	Extra white frosted glass diffuser. Aluminum reflector.
	Other available light colours: 2700K, 4000K (on request).



SUPERFUTUREDESIGN\*