


NASTRO



LA PARETE SI TRASFORMA;
LUCE A BIEMISSIONE, INSTALLABILE
VERTICALMENTE E ORIZZONTALMENTE
THE WALL TRANSFORMS; BI-EMISSION LIGHT,
INSTALLABLE VERTICALLY AND HORIZONTALLY

Indoor Recessed

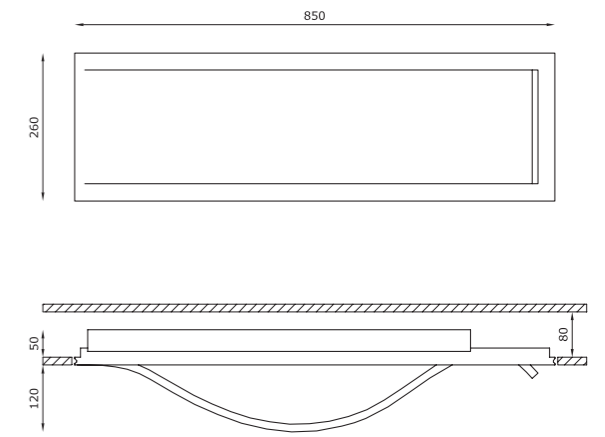



Nastro



OTHER AVAILABLE CODES

2979.27.AC	<i>lens</i>	120°
	<i>light colour</i>	2700K

TECHNICAL FEATURES

Code	2979.AC
Type	Wall and ceiling half recessed
	
Material	AC: AirCoral®
Absorption capacity*	38.52 m ²
Weight	11 Kg
Mounting	Wall and ceiling mounting
IP rating	IP40
Insulation class	I
Control gear	Dimmable constant current driver (included)
Cut out for plasterboard	860 x 270 mm
Lamp type	LED 500 mA 
Lamp wattage	2 x 6.5W
Luminous efficacy	2 x 930 lm - 3000K
Light distribution	Wide beam 120°
Fitting	-
Light colour	White 3000K
Light hole	-
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	-
Energy efficiency class	A+
Note	Extra white satin glass fixed by screws. Vertical and horizontal mounting. Trailing-edge and leading-edge dimming (20 - 100%). Other available light colours: 2700K, 4000K (on request).

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²



Surface Surface

348	ANGOLO
372	BARD
358	CORNICE
346	CUPOLA
362	DOT
334	ELLISSE
350	FLAG
352	FRAME
322	LINEA 5
316	MASTER OPEN
328	MAXIMAL
330	MINIMAL
326	MODUS
312	PIPEDINO
306	PIPEDO
360	PIXEL C
354	PONTE
340	SFERA
370	SIDUS
364	SKY
368	SLICE C
366	STAR
332	VERSUS
318	YANG
320	YIN