


NEFI



Nefi

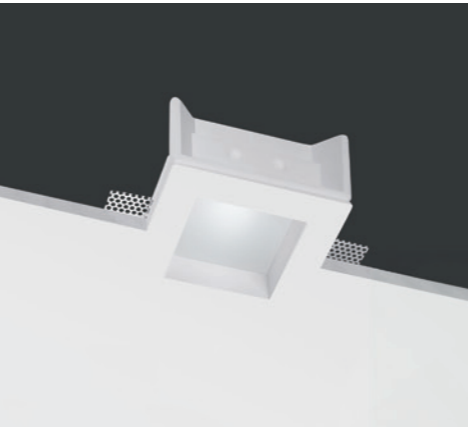

OTHER AVAILABLE CODES

6218.Z.27.AC	<i>lens</i>	40°
	<i>light colour</i>	2700K
6218.Z.40.AC	<i>lens</i>	40°
	<i>light colour</i>	4000K (on request)
emergency		
6219.AC 4 R 40 E _ WD	<i>lens</i>	40°
	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K
example of code composition	6219.AC 4 R 40 E 30 WD	

TECHNICAL FEATURES

Code	6218.Z.AC	6219.AC XX emergency
Type	Downlight 90°	Downlight 90°
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	4.07 m²	4.07 m²
Weight	1.6 Kg	2.1 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included), inverter (included)
Dimensions	A: 140 mm; B: 160 mm	A: 140 mm; B: 160 mm
Cut out for plasterboard	155 × 155 mm	155 × 155 mm
Lamp type	LED 500 mA	LED 500 mA
	Vf: 18 VDC	
Lamp wattage	1 × 9W	1 × 9W
Luminous efficacy	1 × 1125 lm - 3000K	1 × 1125 lm - 3000K
Light distribution	Wide beam 40°	Wide beam 40°
Fitting	-	-
Light colour	White 3000K	White 3000K White 2700K I 4000K (on request)
Light hole	90 × 90 mm	90 × 90 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.
	Other available light colours: 2700K, 4000K.	

OPTIONAL


ON/OFF driver	cod. H8500.E	cod. H8500.E
Trailing and leading edge driver	cod. DRV0000163	cod. DRV0000163
DALI dimmable LED driver	cod. DRV0000029	cod. DRV0000029
PUSH dimmable LED driver	cod. DRV0000026	cod. DRV0000026
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000093	cod. DRV0000093
Brick box	cod. BR6218LT	cod. BR6219LT

For further info and other available drivers please see page 474



INCASSO A LUCE DIFFUSA  
CON VETRO RETROCESSO  
RECESSED DIFFUSE LIGHT FIXTURE  
WITH RETRACTED GLASS

Private Villa, Lugano I ph. T. Pagani


\* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²

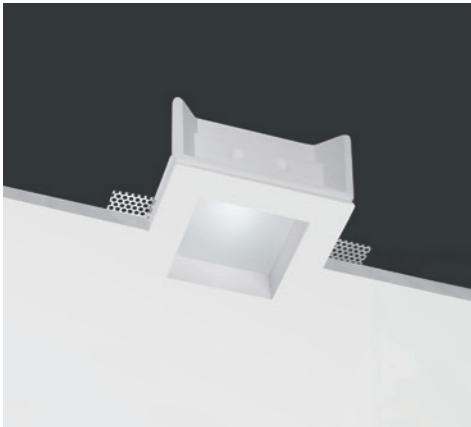

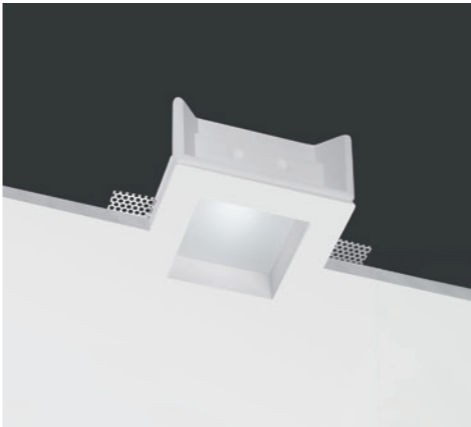



Nefi



Nefi Dim To Warm



TECHNICAL FEATURES

Code	<b>6261.AC</b>	<b>6262.AC</b>
Type	Downlight 90°	Downlight 90°
		
Material	AC: <b>AirCoral®</b>	AC: <b>AirCoral®</b>
Absorption capacity*	4.07 m²	4.07 m²
Weight	1.4 Kg	1.5 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40
Insulation class	III	I
Control gear	Electronic transformer (not included)	-
Dimensions	A: 120 mm; B: 160 mm	A: 120 mm; B: 160 mm
Cut out for plasterboard	155 × 155 mm	155 × 155 mm
Lamp type	QR CB 51	QPAR 16
		
Lamp wattage	1 × 50W max	1 × 50W max
Luminous efficacy	-	-
Light distribution	-	-
Fitting	GU5.3	GU10
Light colour	-	-
Light hole	90 × 90 mm	90 × 90 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	-	-
Emergency	-	-
Energy efficiency class	A	A
Note	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.

OPTIONAL

Trailing and leading edge driver	cod. H8060.LED	-
Kit LED dimmable	cod. 0008KIT	cod. 0009KIT
Brick box	cod. BR6261LT	cod. BR6262LT

For further info and other available drivers please see page 474

TECHNICAL FEATURES

Code	<b>6216.AC 4 R 40 E 98 WD</b>
Type	Downlight 90°
	
Material	AC: <b>AirCoral®</b>
Absorption capacity*	4.07 m²
Weight	1.6 Kg
Mounting	Ceiling recessed
IP rating	IP40
Insulation class	III
Control gear	Remote ON/OFF driver** (not included)
Dimensions	A: 140 mm; B: 160 mm
Cut out for plasterboard	155 × 155 mm
Lamp type	LED 350 mA  Vf: 17 VDC
Lamp wattage	1 × 6W
Luminous efficacy	1 × 600 lm (from 1800K up to 3000K)
Light distribution	Wide beam 40°
Fitting	-
Light colour	Dimming range 1800/3000K
Light hole	90 × 90 mm
Voltage connection	By driver (optional)
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.  **Nefi Dim To Warm requires dimming: amplitude (AM) dim to warm wide range input voltage.

OPTIONAL

Amplitude DALI dimmable LED driver	H8350DA.AM
Amplitude PUSH dimmable LED driver	H8350PH.AM
Brick box	cod. BR6216LT

For further info and other available drivers please see page 474