

NOVA


INCASSO STONDATO A SCOMPARSA,
FORO EMISSIONE LUCE DI 200 mm
*ROUNDED CONCEALED RECESSED FIXTURE,
LIGHT EMISSION HOLE OF 200 mm*



Nova



Indoor Recessed

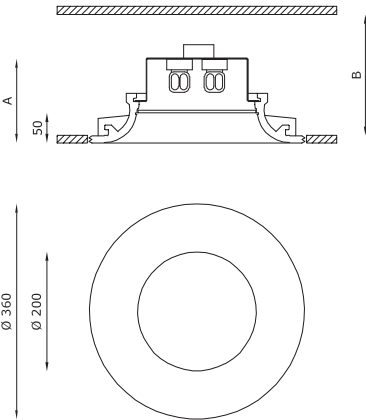

OTHER AVAILABLE CODES

5291.27.AC	<i>lens</i>	40°
	<i>light colour</i>	2700K
5291.40.AC	<i>lens</i>	40°
	<i>light colour</i>	4000K (on request)
5293.27.AC	<i>lens</i>	120°
	<i>light colour</i>	2700K

TECHNICAL FEATURES

Code	5291.AC	5293.AC
Type	Downlight 90° 	Downlight 90° 
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	8.92 m²	8.92 m²
Weight	6.8 Kg	5.8 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40
Insulation class	I	I
Control gear	Constant current electronic driver (included)	Dimmable constant current driver (included)
Dimensions	A: 200 mm; B: 220 mm	A: 170 mm; B: 220 mm
Cut out for plasterboard	Ø 370 mm	Ø 370 mm
Lamp type	LED 1050 mA 	LED 500 mA 
Lamp wattage	1 × 40W	2 × 6.5W
Luminous efficacy	1 × 4680 lm - 3000K	2 × 930 lm - 3000K
Light distribution	Wide beam 40°	Wide beam 120°
Fitting	-	-
Light colour	White 3000K	White 3000K
Light hole	Ø 200 mm	Ø 200 mm
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	-
Energy efficiency class	A++	A+
Note	Extra white satin glass. Frosted glass recessed 50 mm into the ceiling. DALI driver on request. Other available light colours: 2700K, 4000K (on request).	Extra white satin glass. Frosted glass recessed 50 mm into the ceiling. Trailing-edge and leading-edge dimming (20 - 100%). Other available light colours: 2700K, 4000K (on request).

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²