



NUSS IP65

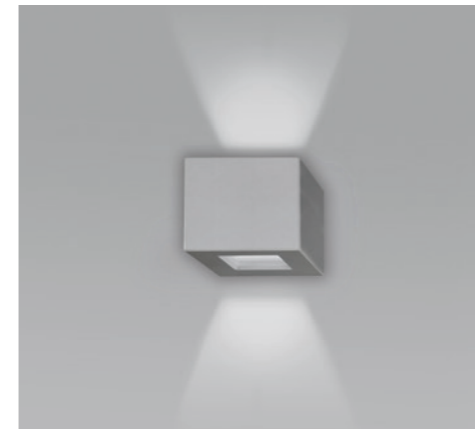

Nuss IP65

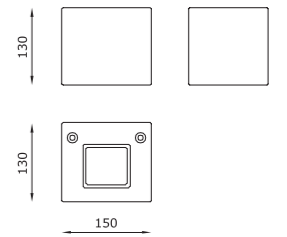

TECHNICAL FEATURES

	3061.DC	3062.DC
Code	3061.DC	3062.DC
Type	Wall lamp	Wall lamp
Material	DC: DurCoral®	DC: DurCoral®
Weight	3.1 Kg	3.1 Kg
Mounting	Wall mounting	Wall mounting
IP rating	IP65	IP65
Insulation class	III	I
Control gear	-	-
Lamp type	LED 	QT-14
Lamp wattage	2 × 4W	1 × 60W
Luminous efficacy	2 × 400 lm - 3000K	-
Light distribution	Wide beam 120°	-
Fitting	-	G9
Light colour	White 3000K	-
Light hole	-	-
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	90	-
Emergency	-	-
Energy efficiency class	A++	A
Note	Extra white frosted glass diffuser. Aluminum reflector.	Extra white frosted glass diffuser. Aluminum reflector.
	No transformer is required, direct operation at 220-240V.	
	Other available light colours: 2700K (on request), 4000K (on request).	

LAMPADA A PARETE IN DURCORAL®, LUCE A BI-EMISSIONE,
PITTURABILE, INERTE AL SALE E AL CLORO

WALL LAMP MADE OF DURCORAL®, BI-EMISSION LIGHT,
PAINTABLE, SALT AND CHLORINE INERT