



ORIS
IP65

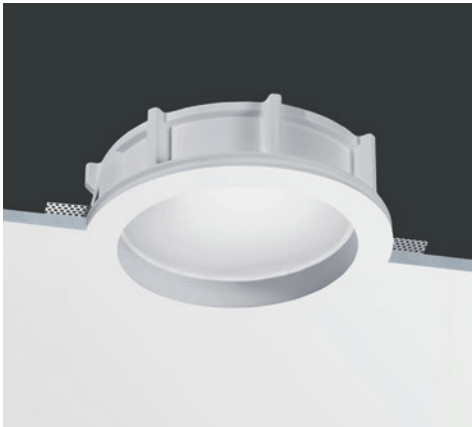

Oris IP65

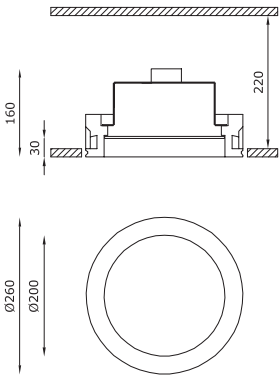

TECHNICAL FEATURES

Code	5381.CW	5388.CW
Type	Downlight 90°	Downlight 90°
Material	CW: Coral WaterOut® I waterproof	CW: Coral WaterOut® I waterproof
Weight	4 Kg	4 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP65	IP65
Insulation class	I	I
Control gear	ON/OFF driver (included)	ON/OFF driver (included)
Cut out for plasterboard	Ø 270 mm	Ø270 mm
Lamp type	LED 1050 mA	LED 350 mA
Lamp wattage	1 × 40W	2 × 6.5W
Luminous efficacy	1 × 4680 lm - 3000K	2 × 810 lm - 3000K
Light distribution	Wide beam 40°	Wide beam 120°
Fitting	-	-
Light colour	White 3000K	White 3000K
Light hole	Ø 200 mm	Ø200 mm
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	-
Energy efficiency class	A++	A+
Note	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling. Other available light colours: 2700K (on request), 4000K (on request).	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling. Trailing-edge and leading-edge dimming (20 - 100%). Other available light colours: 2700K (on request), 4000K (on request).

OPTIONAL

Brick box	-	cod. BR5388LT
-----------	---	---------------

INCASSO CON VETRO RETROCESSO; MASSIMA INVISIBILITÀ
RECESSED FIXTURE WITH RETRACTED GLASS; HIGHEST INVISIBILITY