


# PONTE



## Ponte Grande

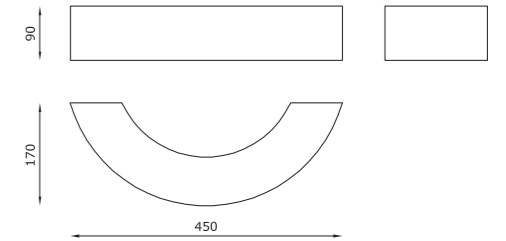

### TECHNICAL FEATURES

	7908.AC	7901.AC	7902.AC
Code	7908.AC	7901.AC	7902.AC
Type	Wall lamp	Wall lamp	Wall lamp
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	8.2 m²	8.2 m²	8.2 m²
Mounting	Wall mounting	Wall mounting	Wall mounting
IP rating	IP20	IP20	IP20
Insulation class	I	I	I
Control gear	Dimmable constant current driver (included)	-	-
Lamp type	LED 500 mA 	A 60 	QT-DE12 (75 mm) 
Lamp wattage	1 × 6.5W	1 × 100W max	1 × 150W max
Luminous efficacy	1 × 930 lm - 3000K	-	-
Light distribution	Wide beam 120°	-	-
Fitting	-	E27	R7s
Light colour	White 3000K	-	-
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	-	-
Emergency	-	-	-
Energy efficiency class	A+	A+	A
Note	Trailing-edge and leading-edge dimming (20 - 100%).  Other available light colours: 2700K (on request), 4000K (on request).	-	-

### OPTIONAL


AirCoral® safety screen	cod. 7900	cod. 7900	-
-------------------------	-----------	-----------	---

LAMPADA A PARETE IN 2 DIMENSIONI,  
LUCE A BIEMISSIONE

WALL LAMP IN TWO SIZES,  
BI-EMISSION LIGHT



Ponte Piccolo

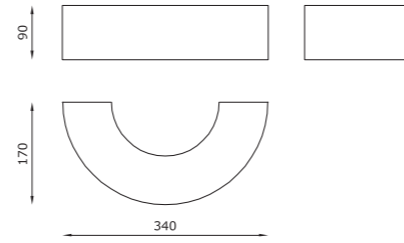

TECHNICAL FEATURES

	7921.AC	7922.AC
Code	7921.AC	7922.AC
Type	Wall lamp	Wall lamp
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	6.67 m²	6.67 m²
Mounting	Wall mounting	Wall mounting
IP rating	IP20	IP20
Insulation class	I	I
Control gear	-	-
Lamp type	D 45	QT-DE12 (75 mm)
Lamp wattage	1 × 60W max	1 × 150W max
Luminous efficacy	-	-
Light distribution	-	-
Fitting	E14	R7s
Light colour	-	-
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	-	-
Emergency	-	-
Energy efficiency class	A+	A
Note	-	-

OPTIONAL

AirCoral® safety screen	cod. 7900	cod. 7900
-------------------------	-----------	-----------

