

# POLARIS

UNA CUPOLA DI LUCE,  
MA ANCHE UNA BOTOLA  
DI ISPEZIONE


A DOME OF LIGHT  
BUT ALSO AN INSPECTION  
HATCH



## Polaris



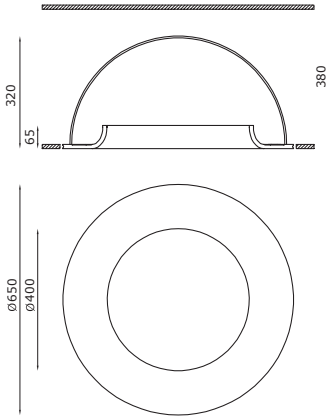

## Indoor Recessed



### OTHER AVAILABLE CODES

6978.40.AC	<i>lens</i> <i>light colour</i>	diffuse 4000K (on request)
------------	------------------------------------	-------------------------------

### TECHNICAL FEATURES

Code	6978.AC
Type	Downlight 90° 
Material	AC: <a href="#">AirCoral®</a>
Absorption capacity*	21.04 m²
Weight	10 Kg
Mounting	Ceiling recessed
IP rating	IP20
Insulation class	III
Control gear	Constant voltage driver (included)
Cut out for plasterboard	Ø 660 mm
Lamp type	LED 12V 
Lamp wattage	1 × 24W
Luminous efficacy	1 × 1800 lm - 3000K
Light distribution	Indirect
Fitting	-
Light colour	White 3000K
Light hole	Ø 400 mm
Voltage connection	220-240V / 12V · 50/60Hz
CRI	>90
Emergency	-
Energy efficiency class	A+
Note	Can be used as a trap door for inspecting the false ceiling.



DALI driver on request.

Other available light colours:  
2700K (on request),  
4000K (on request).