


# SPIRIT



INCASSO A PARETE CON FORO DI EMISSIONE QUADRATO DA 240 mm E PARABOLA WALL-WASHER  
 WALL RECESSED FIXTURE WITH 240 mm SQUARE EMISSION HOLE AND WALL WASHER PARABOLIC DISH



## Spirit

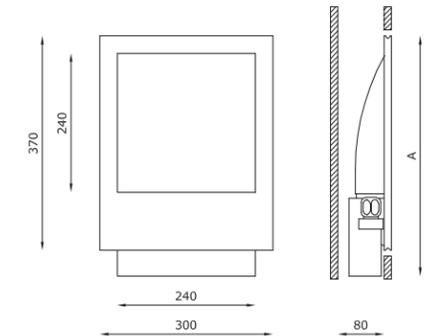

### OTHER AVAILABLE CODES

|                                    |                     |                               |
|------------------------------------|---------------------|-------------------------------|
| <b>6259.27.AC</b>                  | <i>lens</i>         | 120°                          |
|                                    | <i>light colour</i> | 2700K                         |
| <b>emergency</b>                   |                     |                               |
| <b>6256.AC 4 R 00 E _TE</b>        | <i>lens</i>         | 120°                          |
|                                    | <i>light colour</i> |                               |
|                                    | <b>27</b>           | 2700K                         |
|                                    | <b>30</b>           | 3000K                         |
|                                    | <b>40</b>           | 4000K (on request)            |
| <b>example of code composition</b> |                     | 6256.AC 4 R 00 E <b>30</b> TE |

### TECHNICAL FEATURES

| Code                     | <b>6259.AC</b>  | <b>6256.AC XX emergency</b>                         | <b>6252.AC</b>            |
|--------------------------|---|---|---------------------------|
| Type                     | Wall-washer   | Wall-washer   | Wall-washer               |
| Material                 | AC: AirCoral®   | AC: AirCoral®                                       | AC: AirCoral®             |
| Absorption capacity*     | 10.86 m²  | 10.86 m²  | 10.86 m²                  |
| Weight                   | 3.5 Kg  | 3.5 Kg  | 3.3 Kg                    |
| Mounting                 | Wall and ceiling recessed                                 | Wall and ceiling recessed                           | Wall and ceiling recessed |
| IP rating                | IP40  | IP40  | IP40                      |
| Insulation class         | I   | I   | I                         |
| Control gear             | Dimmable constant current driver (included)               | Dimmable constant current driver (included)         | -                         |
| Dimensions               | A: 370 mm   | A: 370 mm   | A: 370 mm                 |
| Cut out for plasterboard | 310 x 380 mm  | 310 x 380 mm  | 310 x 380 mm              |
| Lamp type                | LED 500 mA  | LED 500 mA  | QT-DE12 (75 mm)           |
| Lamp wattage             | 1 x 8W  | 1 x 8W  | 1 x 60W                   |
| Luminous efficacy        | 1 x 930 lm - 3000K  | 1 x 930 lm - 3000K                                  | -                         |
| Light distribution       | Wide beam 120°  | Wide beam 120°                                      | -                         |
| Fitting                  | -   | -   | R7s                       |
| Light colour             | White 3000K   | White 3000K<br>White 2700K   4000K (on request)     | -                         |
| Light hole               | 240 x 240 mm  | 240 x 240 mm  | 240 x 240 mm              |
| Voltage connection       | 220-240V · 50/60Hz  | 220-240V · 50/60Hz                                  | 220-240V · 50/60Hz        |
| CRI                      | >90   | >90   | -                         |
| Emergency                | -   | <b>1 hour</b>                                       | -                         |
| Energy efficiency class  | A+  | A+  | A                         |
| Note                     | Trailing-edge and leading-edge dimming (20 - 100%).       | Trailing-edge and leading-edge dimming (20 - 100%). | -                         |
|                          | DALI driver on request.                                   | DALI driver on request.                             |                           |
|                          | Other available light colours: 2700K, 4000K (on request). |   |                           |

### OPTIONAL

|           |               |               |               |
|-----------|---------------|---------------|---------------|
| Brick box | cod. BR6259LT | cod. BR6256LT | cod. BR6252LT |
|-----------|---------------|---------------|---------------|

\* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²