



TEKNO

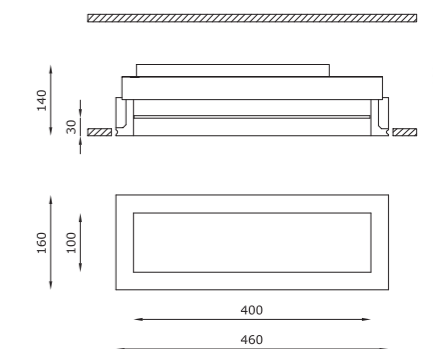

INCASSO RETTANGOLARE
CON VETRO RETROCESSO
RECTANGULAR RECESSED FIXTURE
WITH RETRACTED GLASS

Indoor Recessed

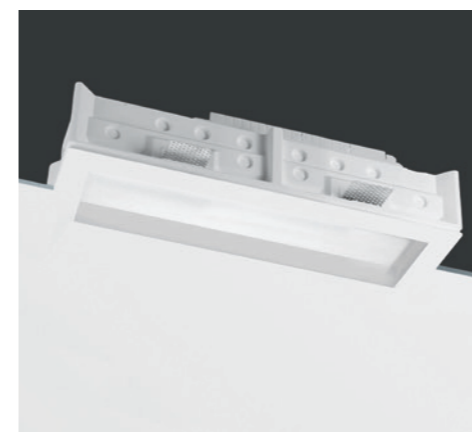

Tekno



TECHNICAL FEATURES

Code	6051.AC	6052.AC
Type	Downlight 90°	Downlight 90°
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	11.04 m ²	11.04 m ²
Weight	6 Kg	6 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40
Insulation class	III	III
Control gear	ON/OFF driver (included)	ON/OFF driver (included)
Cut out for plasterboard	170 × 470 mm	170 × 470 mm
Lamp type	LED 350 mA	LED 350 mA
Lamp wattage	1 × 12W	2 × 12W
Luminous efficacy	1 × 1640 lm - 3000K	2 × 1640 lm - 3000K
Light distribution	Wide beam 120°	Wide beam 120°
Fitting	-	-
Light colour	White 3000K	White 3000K
Light hole	100 × 400 mm	100 × 400 mm
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	-
Energy efficiency class	A+	A+
Note	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.
	Other available light colours: 2700K (on request), 4000K (on request).	Other available light colours: 2700K (on request), 4000K (on request).

OPTIONAL

Brick box	cod. BR6051LT	cod. BR6052LT
-----------	---------------	---------------

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²