


# TETRIS

INCASSO TRIPLO ORIENTABILE  
TRIPLE SWIVELLING RECESSED LIGHT



## Tetris

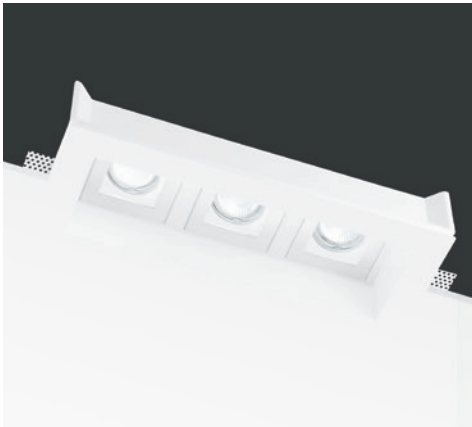

### OTHER AVAILABLE CODES

6246.Z.27.AC	<i>lens</i>	40°
	<i>light colour</i>	2700K
6246.Z.40.AC	<i>lens</i>	40°
	<i>light colour</i>	4000K (on request)

### TECHNICAL FEATURES

Code	<b>6246.Z.AC</b>	<b>6242.AC</b>
Type	Tiltable downlight ± 30° 	Tiltable downlight ± 30° 
Material	AC: <b>AirCoral®</b>	AC: <b>AirCoral®</b>
Absorption capacity*	8.29 m²	8.29 m²
Weight	2.7 Kg	2.7 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Electronic transformer (not included)
Cut out for plasterboard	390 × 160 mm	390 × 160 mm
Lamp type	LED 500 mA  Vf: 3 × 18 VDC	QR CB 51 
Lamp wattage	3 × 9W	3 × 50W max
Luminous efficacy	3 × 1125 lm - 3000K	-
Light distribution	Wide beam 40°	-
Fitting	-	GU5.3
Light colour	White 3000K	-
Light hole	320 × 90 mm	320 × 90 mm
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	-
Emergency	-	-
Energy efficiency class	A++	A
Note	On request available emergency.  Other available light colours: 2700K, 4000K (on request).	-

### OPTIONAL

ON/OFF driver	cod. H8500.E	-
Trailing and leading edge driver	cod. DRV0000163	cod. H8060.LED
DALI dimmable LED driver	cod. DRV0000029	-
PUSH dimmable LED driver	cod. DRV0000026	-
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000093	-
Dimmable electronic transformer	-	cod. H8150
Kit LED dimmable	-	cod. 0008KIT

For further info and other available drivers please see page 474

\* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²

## Indoor Recessed

