


ZEN

LAMPADA A SOSPENSIONE CON SCHERMO SATINATO, BASE A SOFFITTO O AD INCASSO
SUSPENSION LAMP WITH SATIN-FINISHED SHADE, VISIBLE OR RECESSED CEILING BOX



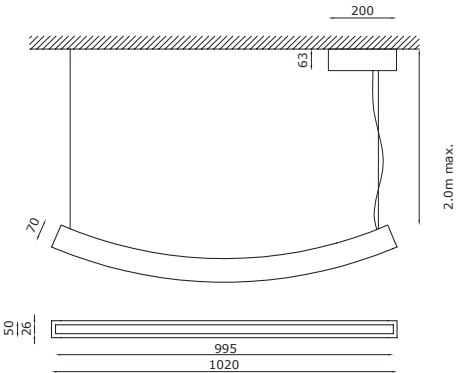

Zen




OTHER AVAILABLE CODES

1451.27.AC	<i>lens</i>	120°
	<i>light colour</i>	2700K

TECHNICAL FEATURES

Code	1451.AC
Type	Suspension lamp
	
Material	AC: AirCoral®
Absorption capacity*	13.54 m²
Mounting	Ceiling mounting
IP rating	IP40
Insulation class	III
Control gear	Constant voltage LED driver (included)
Cut out for plasterboard	-
Lamp type	LED 24V
	
Lamp wattage	1 × 30W
Luminous efficacy	1 × 3150 lm
Light distribution	Wide beam 120°
Fitting	-
Light colour	White 3000K
Voltage connection	220-240V · 50/60Hz
CRI	>80
Emergency	-
Energy efficiency class	A++
Note	Cable L max 2 m.
	White box ceiling for LED driver.
	Matte polycarbonate screen.
	Other available light colours: 2700K.

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²

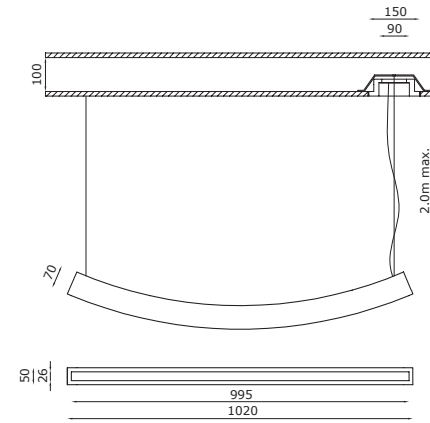

Zen



TECHNICAL FEATURES

Code	1452.AC
Type	Suspension lamp
Material	AC: AirCoral®
Absorption capacity*	13.54 m²
Mounting	Ceiling mounting
IP rating	IP40
Insulation class	III
Control gear	Constant voltage LED driver (included)
Cut out for plasterboard	Ø 160 mm
Lamp type	LED 24V
Lamp wattage	1 × 30W
Luminous efficacy	1 × 3150 lm
Light distribution	Wide beam 120°
Fitting	-
Light colour	White 3000K
Voltage connection	220-240V · 50/60Hz
CRI	>80
Emergency	-
Energy efficiency class	A++
Note	Cable L max 2 m.
	Recessed box of total disappearance for LED driver.
	Matte polycarbonate screen.



Private Villa, Austria | ASZ Architetti | ph. SUPERFUTUREDESIGN*