

DB11



matt white

silver

LAMPADA DA ESTERNO IP65 E IK05.


DB11 è un apparecchio per esterni a parete a mono o biemissione, disponibile con finitura bianca o silver. È un'applicazione che rompe l'oscurità per creare efficaci atmosfere luminose, esaltando percorsi e punti di accesso, facciate e volumi. Sotto le sue linee semplici ed eleganti, una tecnologia avanzata che si integra perfettamente con l'ambiente che lo circonda.

DB11 ha un corpo in alluminio pressofuso, un diffusore in vetro satinato, oltre a guarnizioni in silicone e viti interne in acciaio inox che lo rendono ideale per ambienti esterni.

IP65 AND IK05 LUMINAIRE FOR OUTDOORS.

DB11 is an outdoor luminaire with mono or bi-emission. Available with white or silvery finishings, it is a product which breaks into darkness creating suggestive luminescent settings and valorizing facades, paths, entrances and volumes. Under its simple and elegant lines, lies an advanced technology which perfectly fits in the environment surrounding it.

DB11 has an internal body in die-cast aluminium, a satin-glass diffuser, silicone gaskets and internal inox-steel screws which make it the ideal product for outdoor environments.

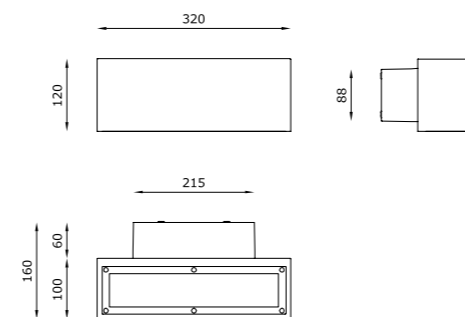

CODE COMPOSITION

203_ 2 S 00 E _ ND	
<i>light colour</i>	
27	2700K
30	3000K
40	4000K
<i>finishing</i>	
WH	white
SL	silver
<i>type</i>	
1	mono direction light
2	double direction light
203_ 6 S 00 E 00 ND	
<i>finishing</i>	
WH	white
SL	silver
<i>type</i>	
3	mono direction light
4	double direction light

example of code composition 2031 WH 2 S 00 E 30 ND

TECHNICAL FEATURES

Code	2031 XX / 2032 XX	2033 XX / 2034 XX	
Type	Wall lamp	Wall lamp	
Material	Aluminum	Aluminum	
Finishing	White Silver	White Silver	
Weight	3.8 Kg	3.8 Kg	
Mounting	Wall mounting	Wall mounting	
IK protection degree	IK 07	IK 07	
IP rating	IP65	IP65	
Insulation class	I	I	
Control gear	Constant voltage LED driver (included)	Conventional ballast (included)	
Lamp type	LED 24 VDC 	TC-D 	
Lamp wattage	Mono: 1 x 13W Double: 2 x 13W	2 x 26W	
Luminous efficacy	Mono: 1700 lm - 3000K Double: 2 x 1700 lm - 3000K	-	
Light distribution	Wide beam 120°	-	
Fitting	-	G24d-3	
Light colour	White 3000K White 2700K 4000K (on request)	-	
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	
CRI	>90	-	
Emergency	-	-	
Note	Mono direction light 	Double direction light 	Mono direction light
		Double direction light 	