

H2STOP




matt white

INCASSO CON GRADO DI PROTEZIONE IP65.

H2STOP è un apparecchio in alluminio da esterni ad incasso, pensato per l'installazione in ambienti umidi come bagni o SPA. Grazie alle linee pulite del suo design minimale, sa fondersi negli ambienti, diventando un immancabile alleato di ogni progettista. Caratterizzato da una verniciatura a polveri ad alta resistenza con finitura bianca.

RECESSED WITH IP65 PROTECTION RATING.

H2STOP is a recessed outdoor luminaire in aluminium designed for being installed in moist places such as bathrooms and SPAs. Thanks to the neat lines of its minimal design, it mingles with the environment, becoming the best ally for every architect or designer. It is characterized by a strongly resistance dust painting with white finishings.



CODE COMPOSITION

2051 WH 2 R 40 E _ WD	light colour	27	2700K
		30	3000K
		40	4000K
		example of code composition 2051 WH 2 R 40 E 30 WD	
2054 WH 4 R 40 E 98 WD			


TECHNICAL FEATURES

Code	2051 XX	2054 XX
Type	Downlight 90° Wall recessed 90° 	Downlight 90° Wall recessed 90°
Material	Aluminum	Aluminum
Finishing	White	White
Weight	0.25 Kg	0.25 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP65	IP65
Insulation class	III	III
Control gear	Constant current electronic driver (not included)	Remote dimmable constant current electronic driver** (not included)
Cut out for plasterboard	75 x 75 mm	75 x 75 mm
Lamp type	LED 500 mA Vf: 18 VDC	LED 350 mA Vf: 17 VDC
Lamp wattage	1 x 9W	1 x 6W
Luminous efficacy	1125 lm - 3000K	600 lm (from 1800K up to 3000K)
Light distribution	Wide beam 40°	Wide beam 40°
Fitting	-	-
Light colour	White 3000K White 2700K 4000K (on request)	Dimming range 1800/3000K
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	95
Emergency	-	-
Note	On request available dimmable PUSH or DALI.	On request available dimmable PUSH or DALI, remote installation.

**H2STOP code 2054 XX requires dimming: amplitude (AM) IEEE1789-2015 dim to warm wide range input voltage.

OPTIONAL ACCESSORIES

product code	optional code	description	info
2051 XX	H8500.E	Constant current electronic driver	Suitable for n°2 code 2051 XX - 500 mA
	H8500.B	Constant current electronic driver	Suitable for n°1 code 2051 XX - 500 mA
2054 XX	H8350DA.AM	Dimming: amplitude (AM) DALI	Suitable for n°2 code 2054 XX
	H8350PH.AM	Dimming: amplitude (AM) PUSH	Suitable for n°2 code 2054 XX







CODE COMPOSITION

2052 WH 6 R 00 E 00 WD


2053 WH 6 R 00 E 00 WD

TECHNICAL FEATURES

Code	2052 XX	2053 XX
Type	Downlight 90° Wall recessed 90° 	Downlight 90° Wall recessed 90° 
Material	Aluminum	Aluminum
Finishing	White	White
Weight	0.2 Kg	0.2 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP65	IP65
Insulation class	III	I
Control gear	Electronic transformer (not included)	-
Cut out for plasterboard	75 x 75 mm	75 x 75 mm
Lamp type	QR CB 51 	QPAR 16 
Lamp wattage	50W max	50W max
Luminous efficacy	-	-
Light distribution	-	-
Fitting	GU5.3	GU10
Light colour	-	-
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	-	-
Emergency	-	-
Note	-	-

OPTIONAL ACCESSORIES

product code	optional code	description	info
2052 XX	H8060.LED	Dimmable electronic transformer	Max watt 60W Volts · Hz 230/12V · 50/60Hz
	0008KIT	Kit LED dimmable	Bulb 7W · 12V
2053 XX	0009KIT	Kit LED dimmable	Bulb 6W · 220-240V

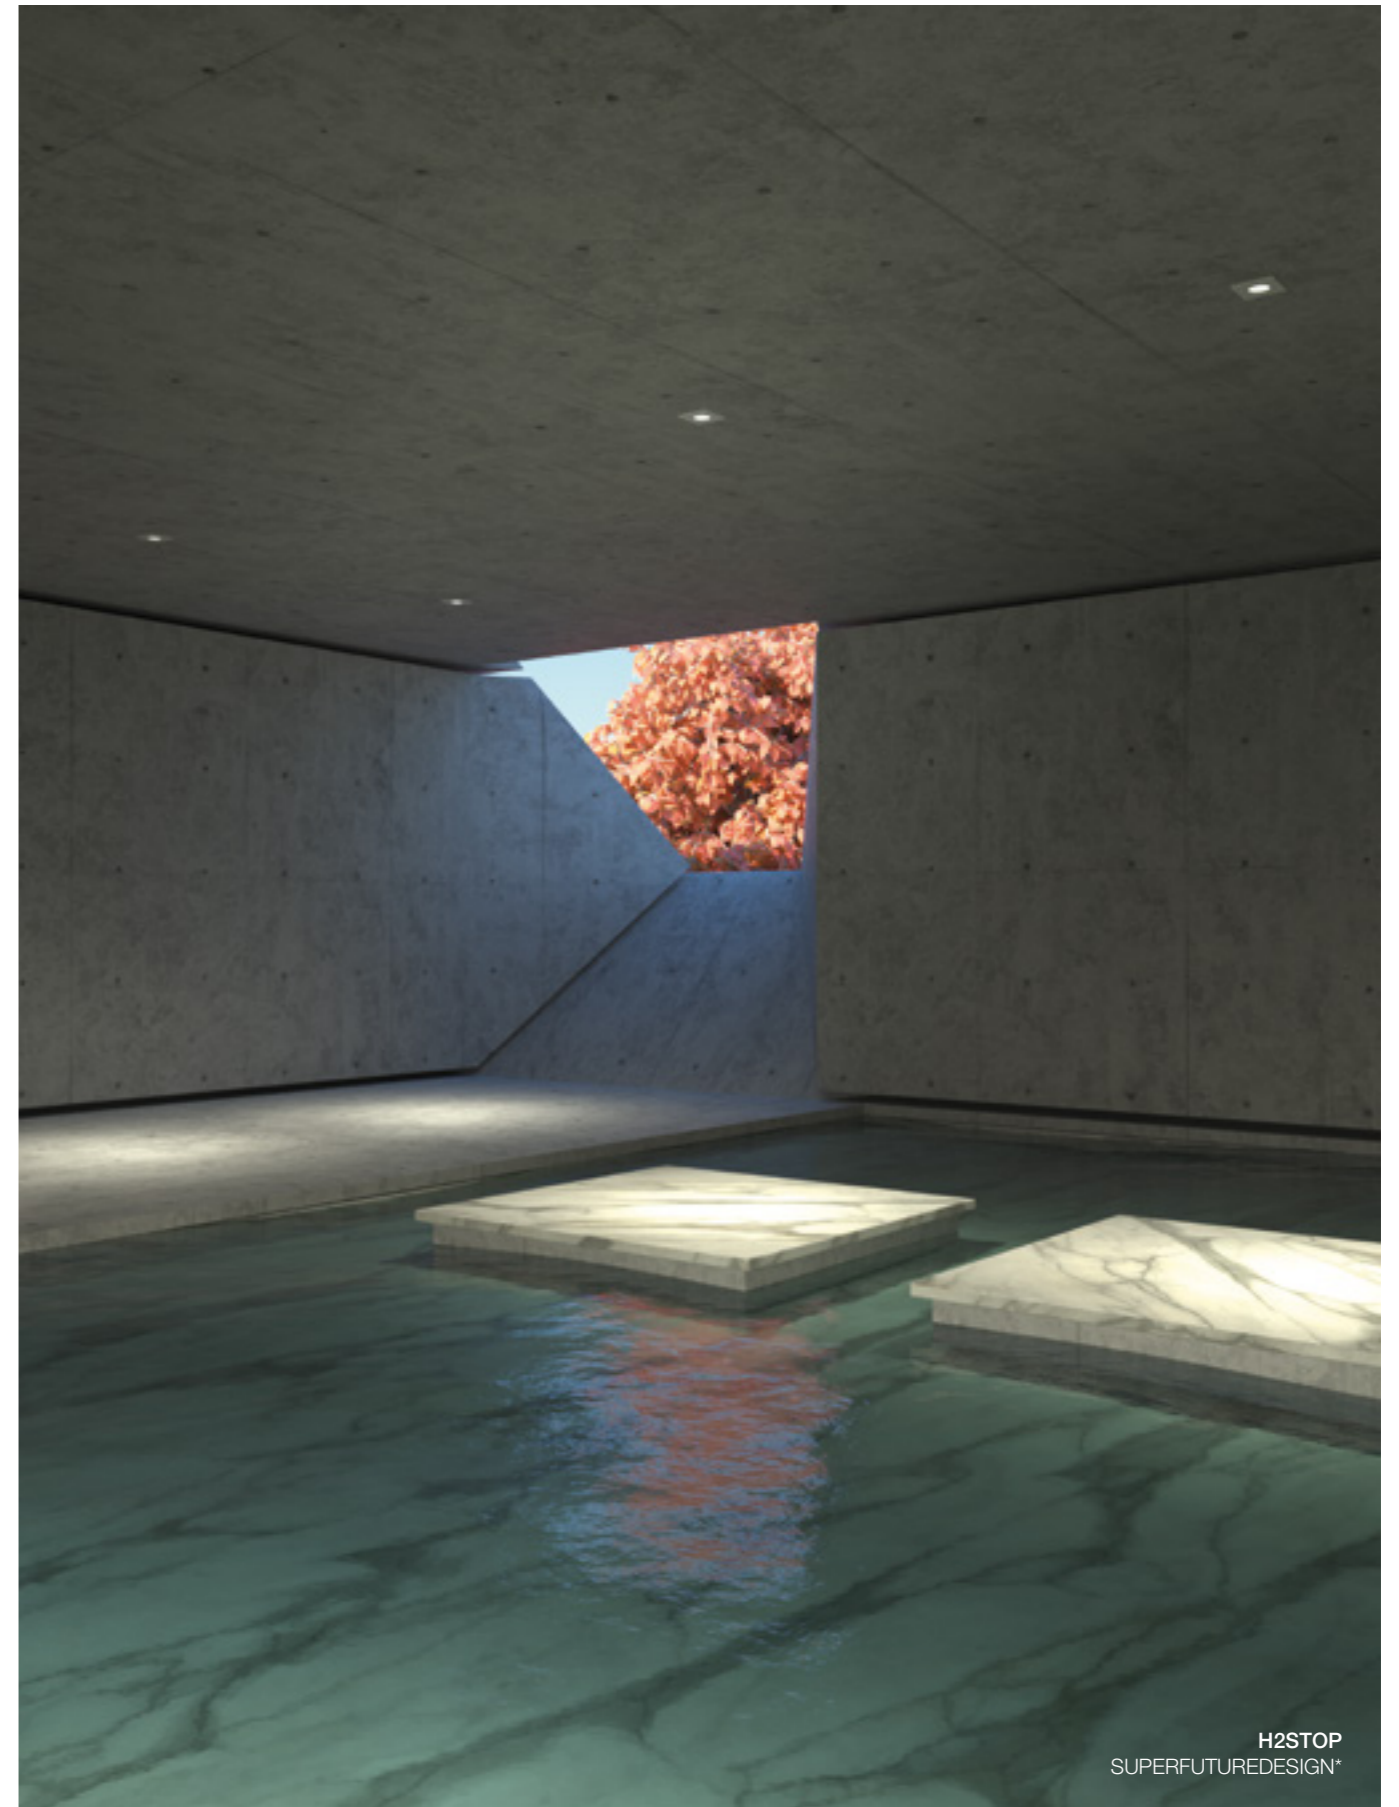

H2STOP
SUPERFUTUREDESIGN*