



M1

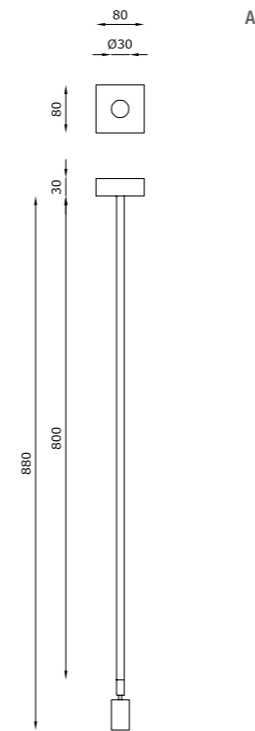

M1 è una sospensione per interni, installabile a soffitto: è composta da un'asta che conduce la luce in modo diretto e puntuale, e un proiettore completamente direzionabile a 360°, che permette di dirigere la luce verso singoli dettagli dello spazio. Una sospensione dal design minimale con luce spot, disponibile con ottiche differenti. Per il modello installabile a soffitto, è possibile scegliere la versione con cassetta contenente il driver oppure con cassetta minimale ribassata con driver da posizionare remoto.

M1 is a suspended indoor luminaire installable on ceiling: it is composed by a pole which scatters light in a direct and punctual manner. It is also provided by a projector adjustable up to 360°, which allows to redirect the luminescent beam towards the single details within the space. A suspended lamp of minimal design and emanating a spot light, available with different lens. For the model installable on ceilings, it is possible to choose between two versions: one with a case including the driver and one with a minimal lowered case with remote driver installation.


CODE COMPOSITION

1501 _ 2 S _ E _ ND	
<i>light colour</i>	
27	2700K
30	3000K
40	4000K
<i>lens</i>	
22	22°
50	50°
<i>finishing</i>	
WH	white
BL	black

example of code composition 1501 BL 2 S 22 E 30 ND

TECHNICAL FEATURES

Code	1501 XX (fig. A)
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black
Weight	0.75 Kg
Mounting	Ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver on board (included)
Lamp type	LED 500 mA
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Note	On request available dimmable PUSH or DALI, remote installation.

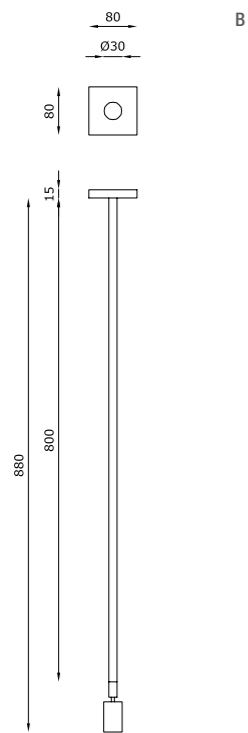

CODE COMPOSITION

1502 _ 2 S _ E _ WD	
	<i>light colour</i>
27	2700K
30	3000K
40	4000K
	<i>lens</i>
22	22°
50	50°
	<i>finishing</i>
WH	white
BL	black

example of code composition 1502 BL 2 S 22 E 30 WD

TECHNICAL FEATURES

Code	1502 XX (fig. B)
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black
Weight	0.75 Kg
Mounting	Ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver, remote installation (not included)
Cut out for plasterboard	-
Lamp type	LED 500 mA Vf: 11 VDC
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V - 50/60Hz
CRI	>90
Emergency	On request
Note	On request available dimmable PUSH or DALI, remote installation.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1502 XX	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°3 code 1502 XX - 500 mA
	H8500.C	Constant current electronic driver. Remote installation	Suitable for n°1 code 1502 XX - 500 mA



M1 custom version
Concept - Fedorova Architects - Russia