


# DOT

LAMPADA A PLAFONE,  
DISPONIBILE A 1, 3 O 5 SORGENTI, PARABOLA  
AD EFFETTO ANTI ABBAGLIAMENTO

CEILING LAMP, AVAILABLE WITH 1, 3 OR 5  
SOURCES, ANTI-GLARE PARABOLIC EFFECT



Dot

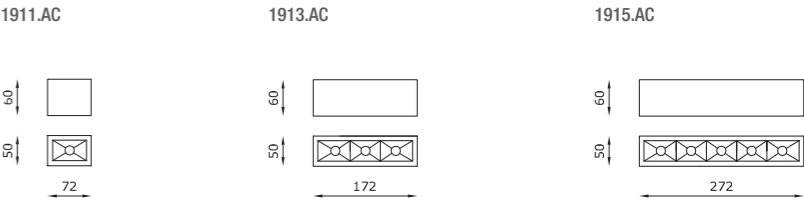

## TECHNICAL FEATURES

Code	1911.AC	1913.AC	1915.AC
Type	Ceiling lamp	Ceiling lamp	Ceiling lamp
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	0.88 m²	2.20 m²	3.52 m²
Mounting	Ceiling mounting	Ceiling mounting	Ceiling mounting
IP rating	IP20	IP20	IP20
Insulation class	III	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included)
Lamp type	LED 500 mA	LED 500 mA	LED 500 mA
Lamp wattage	1 × 1.5W	3 × 1.5W	5 × 1.5W
Luminous efficacy	1 × 150 lm - 3000K	3 × 150 lm - 3000K	5 × 150 lm - 3000K
Light distribution	Narrow beam 15°	Narrow beam 15°	Narrow beam 15°
Fitting	-	-	-
Light colour	White 3000K	White 3000K	White 3000K
Voltage connection	By driver (optional)	By driver (optional)	By driver (optional)
CRI	>90	>90	>90
Emergency	-	-	-
Energy efficiency class	A++	A++	A++
Note	Other available light colours: 2700K (on request), 4000K (on request).	Other available light colours: 2700K (on request), 4000K (on request).	Other available light colours: 2700K (on request), 4000K (on request).
	Other available beams: 30° (on request).	Other available beams: 30° (on request).	Other available beams: 30° (on request).

## OPTIONAL

ON/OFF driver	cod. H8500.C	cod. H8500.C	cod. H8500.B
PUSH dimmable LED driver	cod. DRV0000026	cod. DRV0000026	cod. DRV0000026

For further info and other available drivers please see page 474

\* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²