


GENIUS BRASS

RIFLESSI DORATI CHE NON ALTERANO
IL COLORE DELLA LUCE
GOLDEN REFLECTIONS THAT DO NOT ALTER
THE COLOUR OF THE LIGHT

Il foyer, Piazza Teatro alla Scala, Milan | Arch. Michael Vincent Uy MVUY

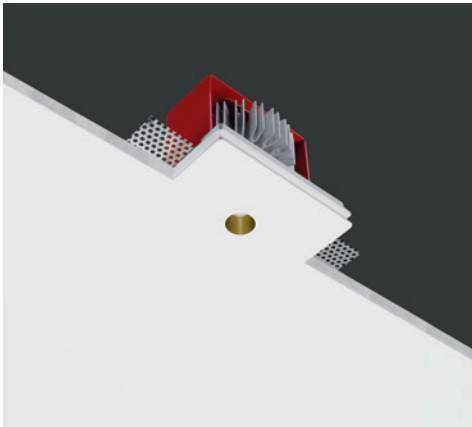


Genius Brass




OTHER AVAILABLE CODES

1861.AC 4 24 E _ WD	lens	24°
	light colour	
	27	2700K
	30	3000K
1861.27.AC	lens	40°
	light colour	2700K
1861.40.AC	lens	40°
	light colour	4000K (on request)
emergency		
1862.AC 4 R _ E _ WD	light colour	
	27	2700K
	30	3000K
	40	4000K (on request)
example of code composition	lens	
	24	24°
	40	40°
	1862.AC 4 R 24 E 30 WD	



OPTIONAL
Honeycomb: anti-glare screen
for proper light directionality.



TECHNICAL FEATURES

Code	1861.AC	1862.AC XX emergency
Type	Downlight 90°	Downlight 90°
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	1.39 m²	1.39 m²
Weight	0.8 Kg	0.8 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included), inverter (included)
Cut out for plasterboard	135 × 110 mm	135 × 110 mm
Lamp type	LED 700 mA	LED 700 mA
	⚡ V _f : 11.5 VDC	⚡ V _f : 11.5 VDC
Lamp wattage	1 × 8.5W	1 × 8.5W
Luminous efficacy	1 × 1000 lm - 3000K	1 × 1000 lm - 3000K
Light distribution	Wide beam 40°	Wide beam 24° 40°
Fitting	-	-
Light colour	White: 3000K	White: 3000K White: 2700K 4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	Other available light colours: 2700K, 4000K (on request).	-
	Other available beams: 24°.	

OPTIONAL

ON/OFF driver	cod. H8700.E	cod. H8700.E
Trailing and leading edge driver	cod. DRV0000129	cod. DRV0000129
DALI dimmable LED driver	cod. DRV0000030	cod. DRV0000030
PUSH dimmable LED driver	cod. DRV0000027	cod. DRV0000027
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000094	cod. DRV0000094
Brick box	cod. BR1861LT	cod. BR1862LT
Honeycomb screen	cod. ACC0053	cod. ACC0053

For further info and other available drivers please see page 474

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²

Il foyer, Piazza Teatro alla Scala, Milan | Arch. Michael Vincent Uy MVUY

