


GENIUS CURVE

LE LINEE DEL GENIUS SI STONDANO
PLASMANDO IL SOFFITTO
THE GENIUS'S LINES WARP,
SHAPING THE CEILING




Genius Curve

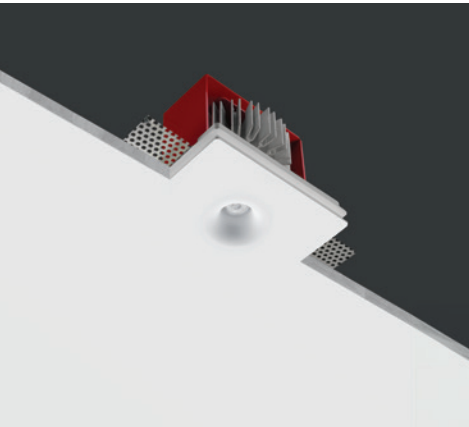


OTHER AVAILABLE CODES

1891.AC 4 24 E _ WD	<i>lens</i>	24°
	<i>light colour</i>	
	27	2700K
	30	3000K
1891.27.AC	<i>lens</i>	40°
	<i>light colour</i>	2700K
1891.40.AC	<i>lens</i>	40°
	<i>light colour</i>	4000K (on request)
<i>emergency</i>		
1892.AC 4 R _ E _ WD	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K (on request)
example of code composition	<i>lens</i>	
	24	24°
	40	40°
	1892.AC 4 R 24 E 30 WD	



GENIUS CURVE IP65
see page 403

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²

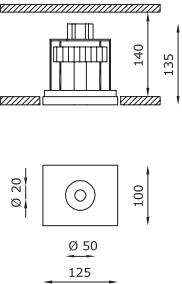

TECHNICAL FEATURES

Code	1891.AC	1892.AC XX emergency
Type	Downlight 90°	Downlight 90°
		
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	1.39 m²	1.39 m²
Weight	0.8 Kg	0.8 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included), inverter (included)
Cut out for plasterboard	135 x 110 mm	135 x 110 mm
Lamp type	LED 700 mA Vf: 11.5 VDC	LED 700 mA Vf: 11.5 VDC
Lamp wattage	1 x 8.5W	1 x 8.5W
Luminous efficacy	1 x 1000 lm - 3000K	1 x 1000 lm - 3000K
Light distribution	Wide beam 40°	Wide beam 24° 40°
Fitting	-	-
Light colour	White: 3000K	White: 3000K White: 2700K 4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V - 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	Other available light colours: 2700K, 4000K (on request). Other available beams: 24°.	-

OPTIONAL

ON/OFF driver	cod. H8700.E	cod. H8700.E
Trailing and leading edge driver	cod. DRV0000129	cod. DRV0000129
DALI dimmable LED driver	cod. DRV0000030	cod. DRV0000030
PUSH dimmable LED driver	cod. DRV0000027	cod. DRV0000027
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000094	cod. DRV0000094
Brick box	cod. BR1891LT	cod. BR1892LT

For further info and other available drivers please see page 474