

GENIUS NAKED




INCASSO A SCOMPARSATA TOTALE INSTALLABILE SU QUALSIASI SUPERFICIE E TOTALMENTE ISPEZIONABILE

TOTALLY CONCEALED INSTALLATION ON ANY SURFACE AND FULLY INSPECTABLE

SCOMPARSATA TOTALE
CON QUALSIASI MATERIALE


TOTALLY CONCEALED INSTALLATION
WITH ANY MATERIAL



wood

il corpo illuminante viene pre-montato sul pannello di rivestimento

the lighting body is pre-mounted on the cladding panel




marble

installabile su materiali con spessore da 5 a 20 mm

it can be installed on materials with a thickness from 5 mm (0.2") to 20 mm (0.79")



mirror

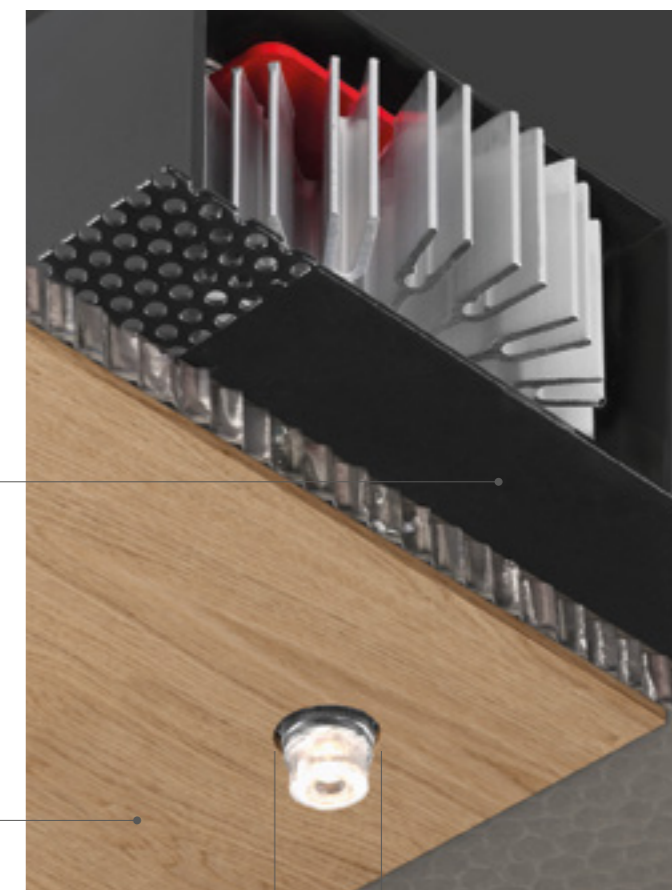

20 mm

l'unica parte visibile è il foro di soli 20 mm
the only visible part is the emission hole of 20 mm (0.79")

PUSH & PULL TECHNOLOGY

closed



open




Non necessita di alcuna botola di ispezione. La parte elettrica è estraibile direttamente dal foro luce con un semplice gesto della mano, grazie alla meccanica push-pull, che facilita l'eventuale estrazione e la sostituzione della sorgente LED in caso di manutenzione.

No need for an inspection hatch. The electrical part can be extracted straight from the light hole just with a simple manual gesture, thanks to the push-pull mechanism which makes it easy to extract and replace the LED source for maintenance purposes.



Hotel Splendid, Madonna di Campiglio | ADC - Arch. Alberto Di Camillo | ph. Le Michette Creative Studio

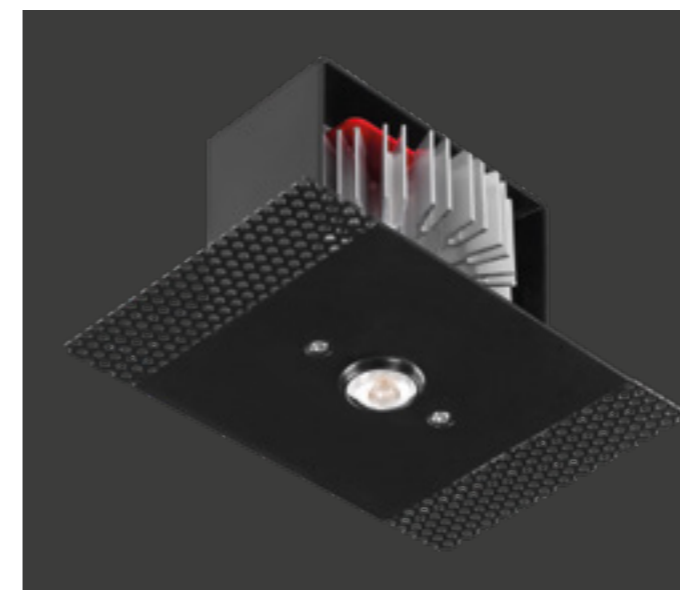

GENIUS NAKED ADATTO PER QUALSIASI SUPPORTO E MATERIALE

GENIUS NAKED SUITABLE FOR ANY SURFACE AND MATERIAL


Genius Naked è l'evoluzione della famiglia Genius, che estende il concetto di totale integrazione superficiale a qualsiasi materiale e contesto.

Genius Naked is the evolution of the Genius family, extending the total surface integration concept to any material and context.



È un apparecchio a scomparsa totale, per installazione a soffitto in ambienti interni, che può essere installato su qualsiasi superficie: legno, cemento, specchio, marmo, moduli industriali con uno spessore da 5 mm a massimo 20 mm.

It is a totally recessed luminaire, for ceiling-mounted indoor installation, which can be installed on any surface: wood, cement, mirror, marble, industrial modules with a thickness from 5 mm (0.2") to a maximum of 20 mm (0.79").

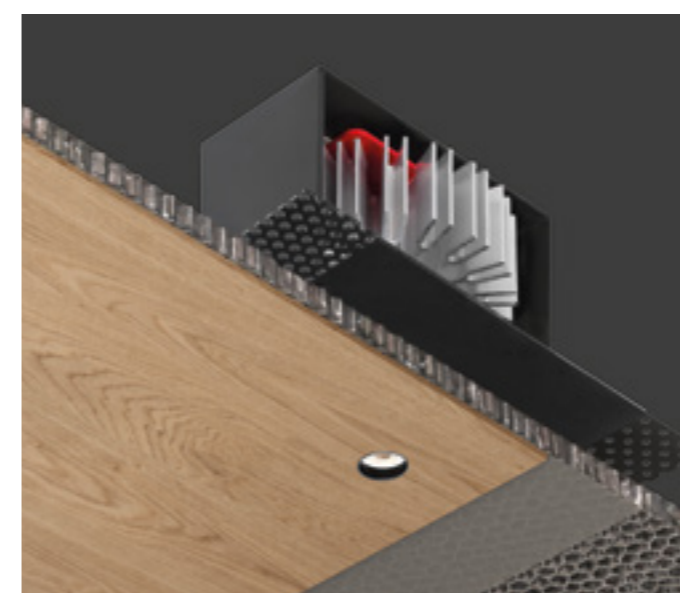

Unica parte visibile è il foro di soli 20 mm, in grado di generare un potente fascio luminoso.

Infatti la variante "Naked" mantiene tutte le prestazioni del Genius, con la parte elettrica estraibile direttamente dal foro luce, grazie alla meccanica push-pull, che facilita l'estrazione e la sostituzione della sorgente LED, senza la necessità di alcuna botola di ispezione e tantomeno di interventi invasivi in caso di manutenzione.

The only visible part is the light emission hole of only 20 mm (0.79"), capable of generating a powerful light beam.

In fact, the "Naked" version retains all the performances of the Genius, with the electrical part which can be removed through the light hole, thanks to a push-pull mechanism making it easy to pull the LED light source out and replace it, with no need for any inspection hatch, nor for invasive maintenance operations.



Genius Naked



OTHER AVAILABLE CODES


1061 BL 4 R _ E _ WD	
<i>light colour</i>	
27	2700K
30	3000K
40	4000K (on request)
<i>lens</i>	
24	24°
40	40°

emergency	
1062 BL 4 R _ E _ WD	
<i>light colour</i>	
27	2700K
30	3000K
40	4000K (on request)
<i>lens</i>	
24	24°
40	40°

example of code composition
1062 BL 4 R 40 E 30 WD



GENIUS NAKED IP65
see page 411



TECHNICAL FEATURES

Code	1061 XX	1062 XX emergency
Type	Downlight 90°	Downlight 90°
Material	Aluminum I Steel	Aluminum I Steel
Finishing	Black	Black
Weight	0.65 Kg	0.65 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included), inverter (included)
Lamp type	LED 700 mA Vf: 11.5 VDC	LED 700 mA Vf: 11.5 VDC
Lamp wattage	1 × 8.5W	1 × 8.5W
Luminous efficacy	1 × 1000 lm - 3000K	1 × 1000 lm - 3000K
Light distribution	Wide beam 24° I 40°	Wide beam 24° I 40°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V - 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	Suitable for installation on surfaces max 20 mm deep.	Suitable for installation on surfaces max 20 mm deep.

OPTIONAL

ON/OFF driver	cod. H8700.E	cod. H8700.E
Trailing and leading edge driver	cod. DRV0000129	cod. DRV0000129
DALI dimmable LED driver	cod. DRV0000030	cod. DRV0000030
PUSH dimmable LED driver	cod. DRV0000027	cod. DRV0000027
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000094	cod. DRV0000094

For further info and other available drivers please see page 474




Hotel Splendid, Madonna di Campiglio I ADC - Arch. Alberto Di Camillo I ph. Le Michette Creative Studio



Il Foyer, Piazza Teatro alla Scala, Milan | Arch. Michael Vincent Uy MVUY



Private Villa, Mexico | Arch. Arturo Ponce De León, Barragán Arquitectos | RN Interior Design | ph. Rafael Gamo

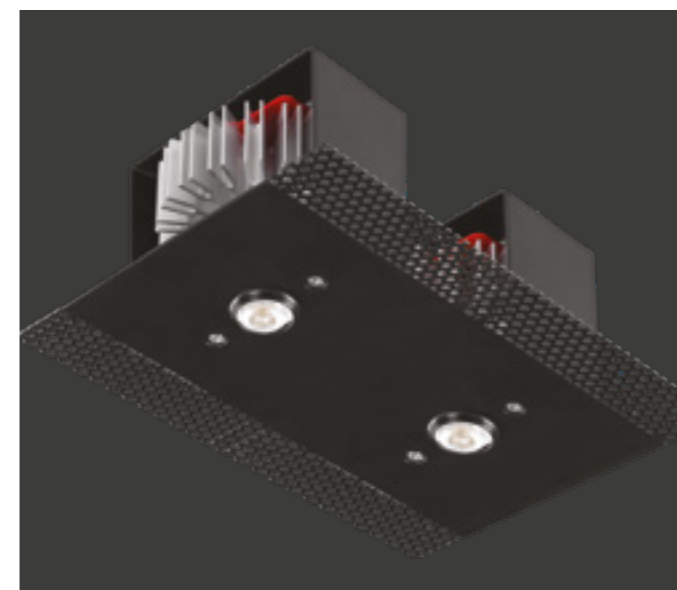


UN GENIUS PER QUALSIASI MATERIALE

A GENIUS FOR ANY MATERIAL


Il design di Genius si raddoppia: Twin Genius, apparecchio da interni a scomparsa totale per installazione a soffitto, che vive ora nella sua versione "Naked", estendendo il concetto di totale integrazione superficiale a qualsiasi materiale e superficie.

The Genius design has been doubled: Twin Genius, a totally recessed indoor luminaire for ceiling mounting, now available in its "Naked" version, extending the total surface integration concept to any material and surface.

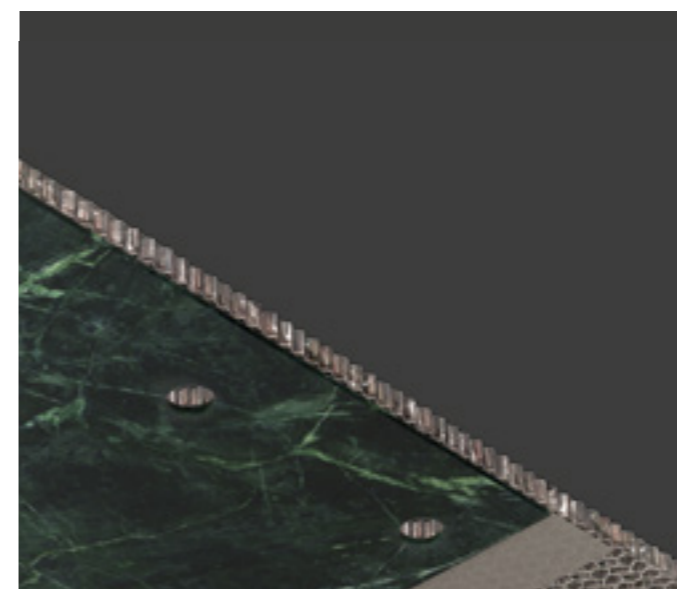



Dotato di due fori di emissione di soli 20 mm, l'apparecchio scompare completamente quando spento, grazie alla totale integrazione con le superfici in cui è installato: legno, cemento, specchio, marmo, moduli industriali con uno spessore da 5 mm ad un massimo di 20 mm.

Fitted with two light emission holes measuring only 20 mm (0.79"), the luminaire disappears completely when it is switched off, thanks to its total integration with the surfaces on which it is installed: wood, cement, mirror, marble and industrial modules with a thickness from 5 mm (0.2") to a maximum of 20 mm (0.79").

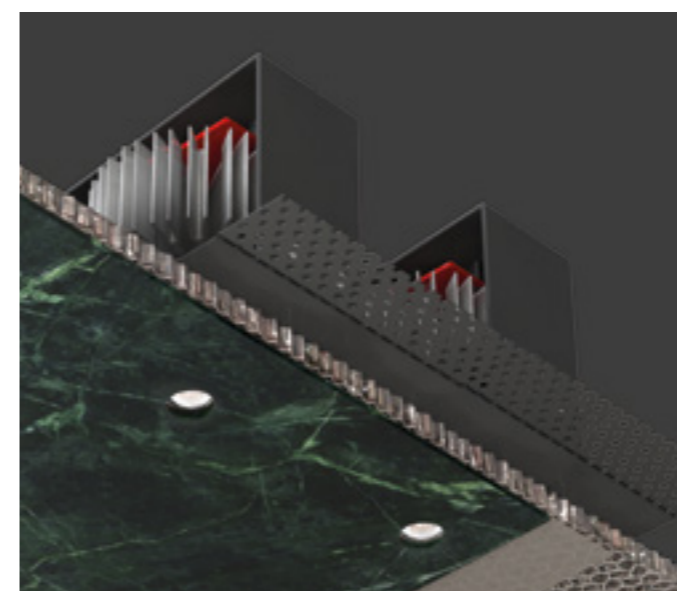

L'elettronica mantiene le prestazioni del Genius, con la parte elettrica estraibile direttamente dal foro luce, grazie alla meccanica push-pull, che facilita la sostituzione della sorgente LED, senza la necessità di alcuna botola di ispezione e tantomeno di interventi invasivi in caso di manutenzione.

The electronics retain the performances of the Genius, with the electrical part which can be removed through the light hole, thanks to a push-pull mechanism making it easy to pull the LED light source out and replace it, so there is no need for any inspection hatch, nor for invasive maintenance operations.

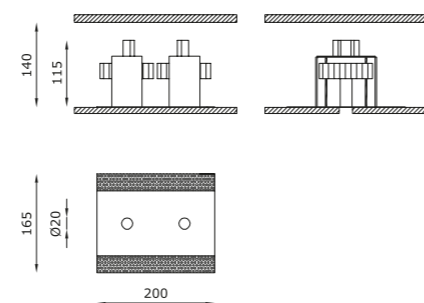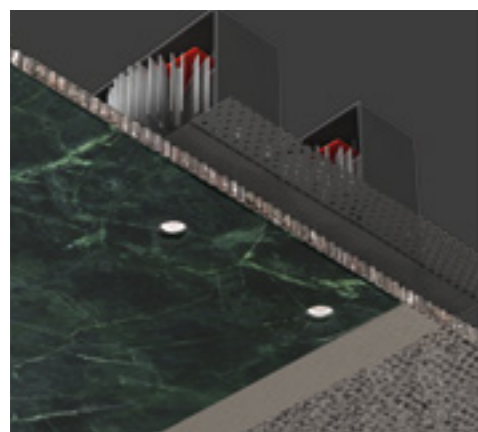

Twin Genius Naked



OTHER AVAILABLE CODES

1065 BL 4 R _E_ WD	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K (on request)
	<i>lens</i>	
	24	24°
	40	40°

emergency 1066 BL 4 R _E_ WD	<i>lens</i>	
		40°
	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K (on request)
	<i>lens</i>	
	24	24°
	40	40°

example of code composition
1066 BL 4 R 40 E 30 WD

TECHNICAL FEATURES

Code	1065 XX	1066 XX emergency
Type	Downlight 90°	Downlight 90°
Material	Aluminum I Steel	Aluminum I Steel
Finishing	Black	Black
Weight	1.3 Kg	1.3 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included), inverter (included)
Lamp type	LED 700 mA Vf: 2 x 11.5 VDC	LED 700 mA Vf: 2 x 11.5 VDC
Lamp wattage	2 x 8.5W	2 x 8.5W
Luminous efficacy	2 x 1000 lm - 3000K	2 x 1000 lm - 3000K
Light distribution	Wide beam 24° I 40°	Wide beam 24° I 40°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V - 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	Suitable for installation on surfaces max 20 mm deep.	Suitable for installation on surfaces max 20 mm deep.

OPTIONAL

	cod. H8700.E	cod. H8700.E
ON/OFF driver	cod. H8700.E	cod. H8700.E
Trailing and leading edge driver	cod. DRV0000129	cod. DRV0000129
DALI dimmable LED driver	cod. DRV0000030	cod. DRV0000030
PUSH dimmable LED driver	cod. DRV0000027	cod. DRV0000027
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000094	cod. DRV0000094

For further info and other available drivers please see page 474



Private Villa, Mexico | Arch. Arturo Ponce De León, Barragán Arquitectos | RN Interior Design | ph. Rafael Gamo

DOPPIA EMISSIONE ED EFFICIENZA LUMINOSA
INSTALLABILE SU OGNI TIPO DI MATERIALE
DOUBLE EMISSION OF LUMINOUS EFFICIENCY
INSTALLABLE ON ANY TYPE OF MATERIAL



Private Villa, Mexico | Arch. Arturo Ponce De León, Barragán Arquitectos | RN Interior Design | ph. Rafael Gamo