


GENIUS BASIC



LUCE RETROCESSA
 INSTALLABILE IN 80 mm DI PROFONDITÀ
 PARTE ELETTRICA ESTRAIBILE DALLA PARTE FRONTALE


RECESSED LIGHT
 INSTALLABLE IN 80 mm DEPTH
 ELECTRICAL PART REMOVABLE FROM THE FRONT

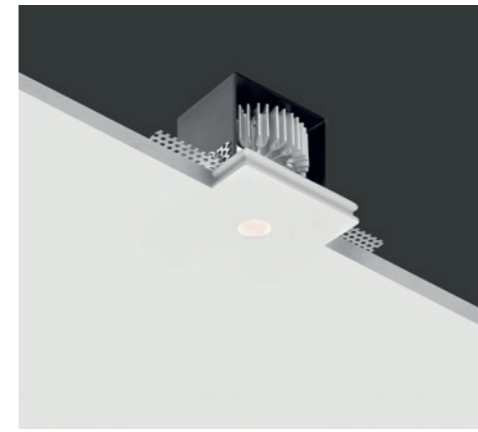

Genius Basic



MAINTENANCE

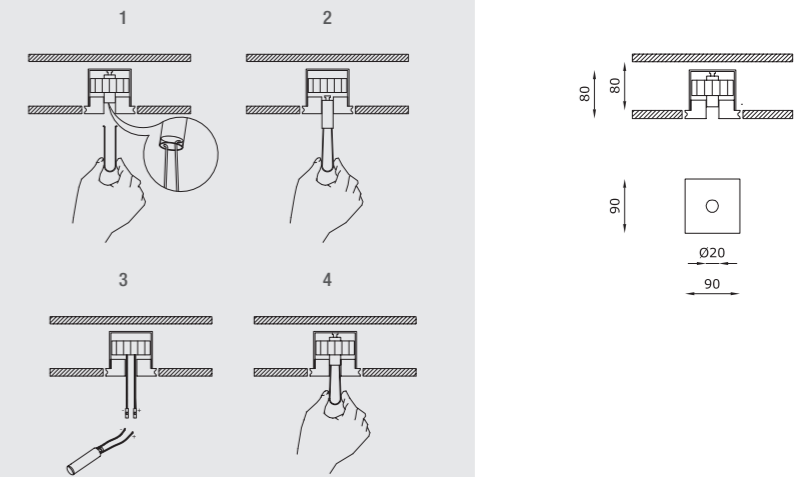

OTHER AVAILABLE CODES

1885.00 4 R _ E _ WD	<i>light colour</i>	27	2700K
		30	3000K
	<i>lens</i>	40	4000K (on request)
		24	24°
		40	40°
		<i>emergency</i>	
1886.00 4 R 24 E _ WD	<i>lens</i>	24	24°
		<i>light colour</i>	
		27	2700K
		30	3000K
		40	4000K (on request)
example of code composition		1885.00 4 R 24 E 30 WD	

TECHNICAL FEATURES

Code	1885.00 XX	1886.00 XX emergency
Type	Downlight 90°	Downlight 90°
Material	00: Coral®	00: Coral®
Weight	0.65 Kg	0.65 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included), inverter (included)
Cut out for plasterboard	100 x 100 mm	100 x 100 mm
Lamp type	LED 700 mA Vf: 6.5 VDC	LED 700 mA Vf: 6.5 VDC
Lamp wattage	1 x 4.5W	1 x 4.5W
Luminous efficacy	1 x 540 lm - 3000K	1 x 540 lm - 3000K
Light distribution	Wide beam 24° 40°	Wide beam 24°
Fitting	-	-
Light colour	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	-	-


OPTIONAL

OPTIONAL	cod. H8700.E	cod. H8700.E
ON/OFF driver	cod. DRV0000087	cod. DRV0000087
Trailing and leading edge driver	cod. DRV0000030	cod. DRV0000030
DALI dimmable LED driver	cod. DRV0000027	cod. DRV0000027
PUSH dimmable LED driver	cod. DRV0000094	cod. DRV0000094
PUSH/1-10V/DALI dimmable LED driver	cod. BR1885LT	cod. BR1886LT

For further info and other available drivers please see page 474



GENIUS BASIC IP65
 see page 413

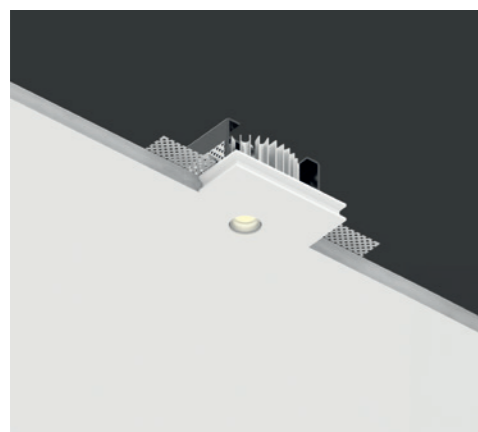


Genius Basic Flat



OTHER AVAILABLE CODES

1887.00 4 R 24 E _ WD	lens	24°
	light colour	
	27	2700K
	30	3000K
	40	4000K (on request)
emergency 1888.00 4 R 24 E _ WD	lens	24°
	light colour	
	27	2700K
	30	3000K
	40	4000K (on request)

example of code composition
1887.00 4 R 24 E **30** WD



TECHNICAL FEATURES

Code	1887.00 XX	1888.00 XX emergency
Type	Downlight 90°	Downlight 90°
Material	00: Coral®	00: Coral®
Weight	0.65 Kg	0.65 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included), inverter (included)
Cut out for plasterboard	100 × 100 mm	100 × 100 mm
Lamp type	LED 700 mA Vf: 6.5 VDC	LED 700 mA Vf: 6.5 VDC
Lamp wattage	1 × 4.5W	1 × 4.5W
Luminous efficacy	1 × 540 lm - 3000K	1 × 540 lm - 3000K
Light distribution	Wide beam 24°	Wide beam 24°
Fitting	-	-
Light colour	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	-	-

OPTIONAL

ON/OFF driver	cod. H8700.E	cod. H8700.E
Trailing and leading edge driver	cod. DRV0000087	cod. DRV0000087
DALI dimmable LED driver	cod. DRV0000030	cod. DRV0000030
PUSH dimmable LED driver	cod. DRV0000027	cod. DRV0000027
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000094	cod. DRV0000094
Brick box	cod. BR1887LT	cod. BR1888LT


For further info and other available drivers please see page 474

Genius Basic Flat is the most space-saving of the Genius family, installed in just 50 mm. The electrical part can be pulled out directly from the light hole.




Abks Break Time, Milan | ph. Le Michette Creative Studio

GENIUS BASIC IN SOLI 60 mm DI SPESSORE
GENIUS BASIC IN JUST 60 mm THICK

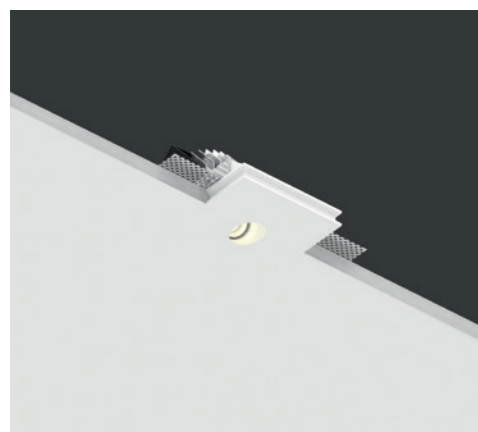

Genius Basic Slope



OTHER AVAILABLE CODES

1865.00 4 R 24 E _ WD	lens	24°
	light colour	
	27	2700K
	30	3000K
	40	4000K (on request)

1866.00 4 R 24 E _ WD	lens	24°
	light colour	
	27	2700K
	30	3000K
	40	4000K (on request)

example of code composition 1865.00 4 R 24 E **30** WD

TECHNICAL FEATURES


Code	1865.00 XX	1866.00 XX emergency
Type	Downlight 90°	Downlight 90°
Material	00: Coral®	00: Coral®
Weight	0.65 Kg	0.65 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included), inverter (included)
Cut out for plasterboard	100 × 100 mm	100 × 100 mm
Lamp type	LED 700 mA Vf: 6.5 VDC	LED 700 mA Vf: 6.5 VDC
Lamp wattage	1 × 4.5W	1 × 4.5W
Luminous efficacy	1 × 540 lm - 3000K	1 × 540 lm - 3000K
Light distribution	Wide beam 24°	Wide beam 24°
Fitting	-	-
Light colour	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	-	-

OPTIONAL

ON/OFF driver	cod. H8700.E	cod. H8700.E
Trailing and leading edge driver	cod. DRV0000087	cod. DRV0000087
DALI dimmable LED driver	cod. DRV0000030	cod. DRV0000030
PUSH dimmable LED driver	cod. DRV0000027	cod. DRV0000027
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000094	cod. DRV0000094
Brick box	cod. BR1865LT	cod. BR1866LT

For further info and other available drivers please see page 474

Genius Basic Slope is a recessed downlight with an asymmetrical light hole, with a 40° inclined axis, with the possibility of wall-washer effect. It can be installed on ceilings or wall, as a step marker. Rear recess of 80 mm.

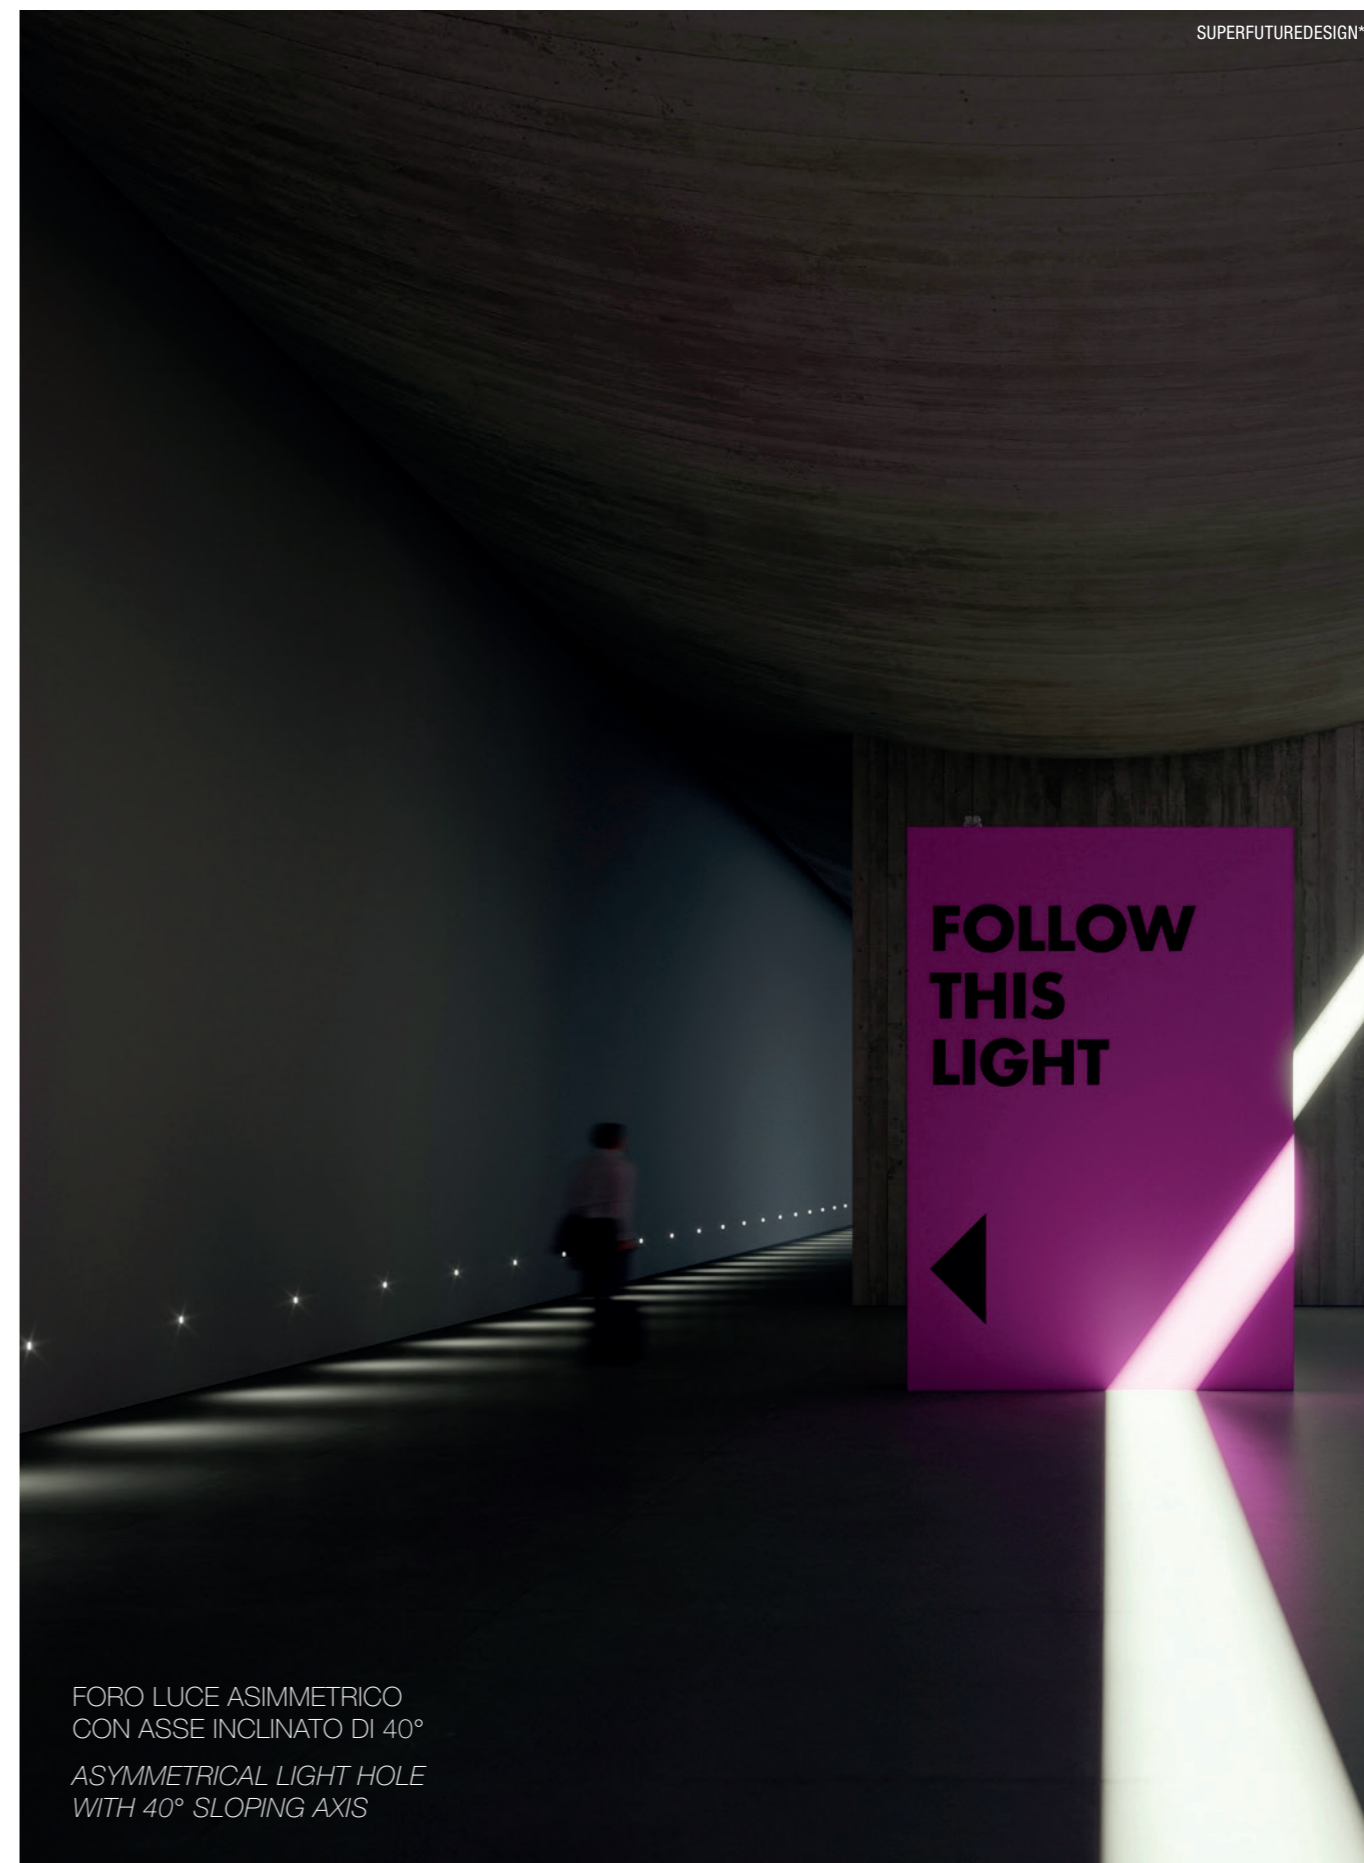

FORO LUCE ASIMMETRICO
CON ASSE INCLINATO DI 40°
ASYMMETRICAL LIGHT HOLE
WITH 40° SLOPING AXIS