



# GENIUSQUARE BRASS

RIFLESSI DORATI E COLORE CALDO DELL'OTTONE CHE NON ALTERANO IL COLORE DELLA LUCE, BASSA LUMINANZA

GOLDEN REFLECTIONS AND WARM BRASS COLOUR THAT DO NOT ALTER THE COLOUR OF THE LIGHT, LOW LUMINANCE

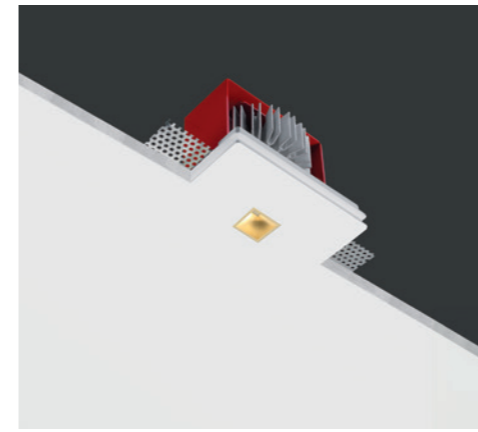

## Geniusquare Brass



### OTHER AVAILABLE CODES

1895.AC 4 R _ E _ WD	
<i>light colour</i>	
27	2700K
30	3000K
40	4000K (on request)
<i>lens</i>	
24	24°
40	40°

1896.AC 4 R _ E _ WD	
<i>light colour</i>	
27	2700K
30	3000K
40	4000K (on request)
<i>lens</i>	
24	24°
40	40°

example of code composition 1896.AC 4 R 24 E 30 WD

### TECHNICAL FEATURES

Code	1895.AC XX	1896.AC XX emergency
Type	Downlight 90°	Downlight 90°
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	1.39 m²	1.39 m²
Weight	0.8 Kg	0.8 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included), inverter (included)
Cut out for plasterboard	135 × 110 mm	135 × 110 mm
Lamp type	LED 700 mA ⚡ V <sub>f</sub> : 11.5 VDC	LED 700 mA ⚡ V <sub>f</sub> : 11.5 VDC
Lamp wattage	1 × 8.5W	1 × 8.5W
Luminous efficacy	1 × 1000 lm - 3000K	1 × 1000 lm - 3000K
Light distribution	Wide beam 24°   40°	Wide beam 24°   40°
Fitting	-	-
Light colour	White 3000K White 2700K   4000K (on request)	White 3000K White 2700K   4000K (on request)
Light hole	20 × 20 mm	20 × 20 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	-	-

### OPTIONAL

ON/OFF driver	cod. H8700.E	cod. H8700.E
Trailing and leading edge driver	cod. DRV0000129	cod. DRV0000129
DALI dimmable LED driver	cod. DRV0000030	cod. DRV0000030
PUSH dimmable LED driver	cod. DRV0000027	cod. DRV0000027
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000094	cod. DRV0000094
Brick box	cod. BR1895LT	cod. BR1896LT

For further info and other available drivers please see page 474

\* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²