


# GENIUS BASIC IP65




LUCE RETROCESSA DA ESTERNI  
INSTALLABILE IN 80 mm

OUTDOOR RECESSED LIGHT  
INSTALLABILE IN 80 mm

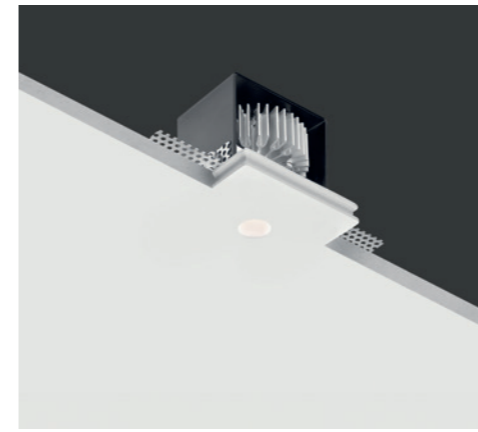

## Genius Basic IP65

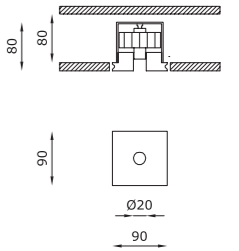

### OTHER AVAILABLE CODES

1985.CW 4 R 24 E _ WD	lens	24°
	light colour	
	27	2700K
	30	3000K
emergency	40	4000K (on request)
	lens	24°
	light colour	
	27	2700K
1986.CW 4 R 24 E _ WD	30	3000K
	40	4000K (on request)
	example of code composition	1985.CW 4 R 24 E 30 WD

### TECHNICAL FEATURES

Code	1985.CW XX	1986.CW XX emergency
Type	Downlight 90°	Downlight 90°
Material	CW: Coral Waterout® I waterproof	CW: Coral Waterout® I waterproof
Weight	0.65 Kg	0.65 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP65	IP65
Insulation class	III	III
Control gear	Remote driver (not included)	Remote constant current electronic driver (not included), inverter (included)
Cut out for plasterboard	100 × 100 mm	100 × 100 mm
Lamp type	LED 700 mA Vf: 6.5 VDC	LED 700 mA Vf: 6.5 VDC
Lamp wattage	1 × 4.5W	1 × 4.5W
Luminous efficacy	1 × 540 lm - 3000K	1 × 540 lm - 3000K
Light distribution	Wide beam 24°	Wide beam 24°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 24 mm	Ø 24 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	-	-

### OPTIONAL

Optional	1985.CW XX	1986.CW XX emergency
ON/OFF driver	cod. H8700.E	cod. H8700.E
Trailing and leading edge driver	cod. DRV0000087	cod. DRV0000087
DALI dimmable LED driver	cod. DRV0000030	cod. DRV0000030
PUSH dimmable LED driver	cod. DRV0000027	cod. DRV0000027
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000094	cod. DRV0000094
Brick box	cod. BR1985LT	cod. BR1986LT

For further info and other available drivers please see page 474



GENIUS BASIC  
see page 143