


# GENIUS BASIC NAKED



COMPATTO, VERSATILE E INSTALLABILE  
SU QUALSIASI MATERIALE

COMPACT, VERSATILE, AND INSTALLABLE  
ON ANY MATERIAL

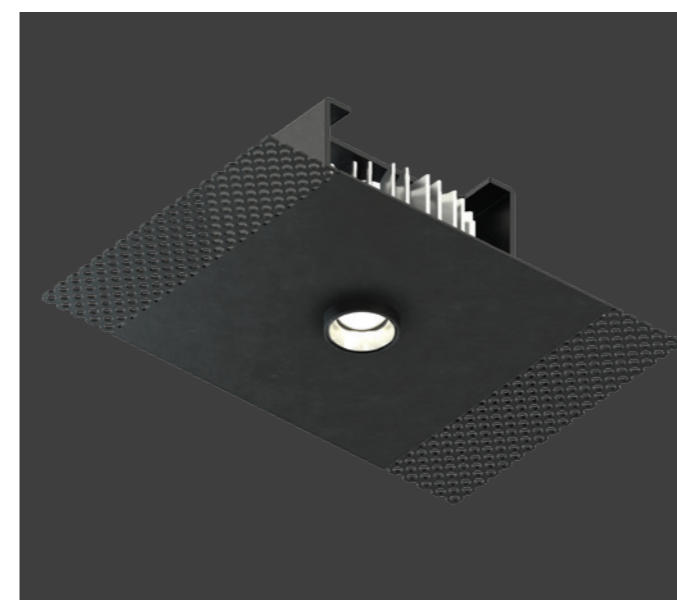


IL PIÙ COMPATTO DA INSTALLARE  
SU QUALSIASI MATERIALE.

*THE MOST COMPACT TO INSTALL  
ON ANY MATERIAL.*


Apparecchio da incasso a scomparsa totale per interni, Genius Basic Naked è una variante di Genius Basic, che unisce alle sue note caratteristiche la possibilità di integrazione superficiale in qualunque contesto e materiale.

*A totally recessed indoor luminaire, Genius Basic Naked is a variation of the Genius Basic, blending its characteristic notes with the possibility of surface integration in any context and material.*

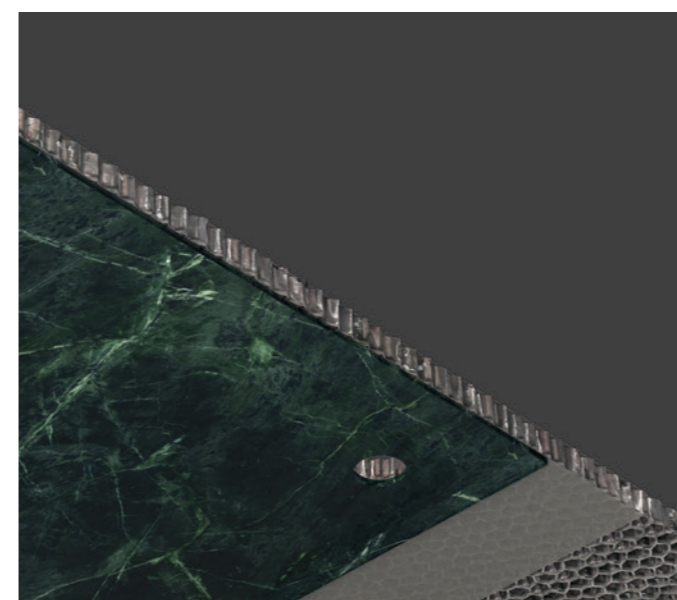


Questo nuovo Genius appositamente pensato per il mondo Contract, è installabile in soli 80 mm di intercapedine, su qualsiasi materiale (legno, cemento, specchio, marmo, moduli industriali) con uno spessore da 4 mm a massimo 30 mm.

*This new Genius, specially designed for the Contract world, can be installed in just 80 mm (3.15") of cavity space, on any material (wood, concrete, mirror, marble, industrial modules) with a thickness from 4 mm (0.16") to a maximum of 30 mm (1.18").*

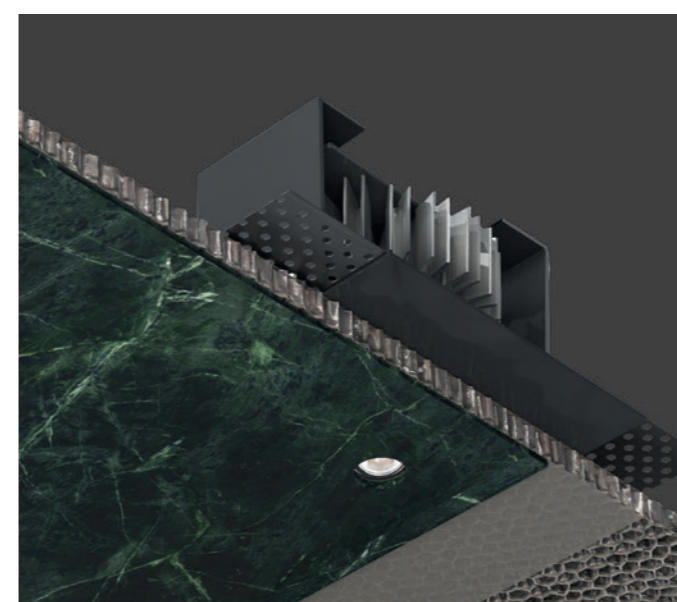

Genius Basic Naked è la sintesi della tecnologia Buzzi & Buzzi in termini di versatilità ed efficienza: unica parte visibile è il foro di soli 20 mm, da cui eroga un flusso di 540 lm; la parte elettrica è estraibile direttamente dal foro luce, senza necessità di alcuna botola di ispezione e tantomeno di interventi invasivi in caso di manutenzione.

*Genius Basic Naked is the synthesis of Buzzi & Buzzi technology in terms of versatility and efficiency: the only visible part is the light emission hole measuring only 20 mm (0.79"), which provides a light flow of 540 lm; the electrical part can be removed through the light hole, so there is no need for any inspection hatch, nor for invasive maintenance operations.*

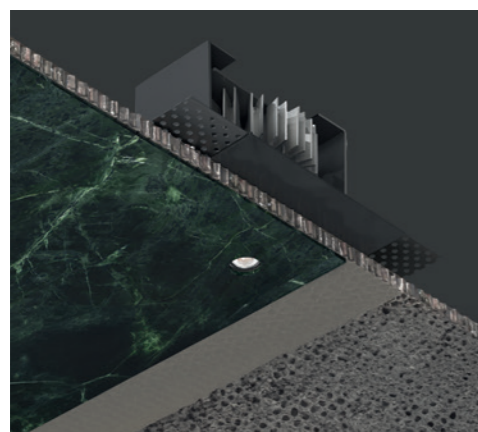

## Genius Basic Naked



### OTHER AVAILABLE CODES


1071 BL 4 R 24 E _ WD	lens	24°
	light colour	
	27	2700K
	30	3000K
	40	4000K (on request)

emergency	1072 BL 4 R 24 E _ WD	lens	24°
		light colour	
		27	2700K
		30	3000K
		40	4000K (on request)

example of code composition  
1071 BL 4 R 24 E 30 WD



GENIUS BASIC NAKED IP65  
see page 416



### TECHNICAL FEATURES

Code	1071 XX	1072 XX emergency
Type	Downlight 90°	Downlight 90°
Material	Aluminum I Steel	Aluminum I Steel
Finishing	Black	Black
Weight	0.65 Kg	0.65 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included), inverter (included)
Lamp type	LED 700 mA Vf: 6.5 VDC	LED 700 mA Vf: 6.5 VDC
Lamp wattage	1 × 4.5W	1 × 4.5W
Luminous efficacy	1 × 540 lm - 3000K	1 × 540 lm - 3000K
Light distribution	Wide beam 24°	Wide beam 24°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V - 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	Suitable for installation on surfaces max 20 mm deep.	Suitable for installation on surfaces max 20 mm deep.

### OPTIONAL


	cod. H8700.E	cod. H8700.E
ON/OFF driver	cod. H8700.E	cod. H8700.E
Trailing and leading edge driver	cod. DRV0000087	cod. DRV0000087
DALI dimmable LED driver	cod. DRV0000030	cod. DRV0000030
PUSH dimmable LED driver	cod. DRV0000027	cod. DRV0000027
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000094	cod. DRV0000094

For further info and other available drivers please see page 474




Level Shoes, Dubai Mall | SUPERFUTUREDESIGN\*

\* The absorption capacity per m<sup>2</sup> calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m<sup>2</sup>

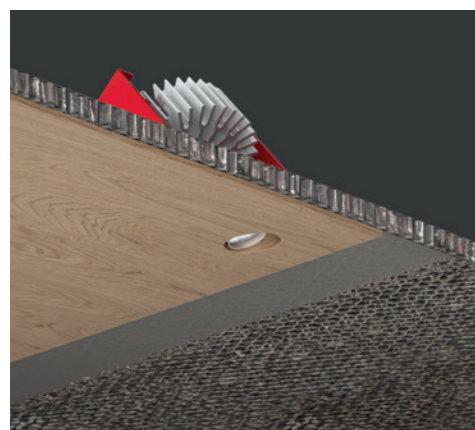

## Genius Basic Slope Naked



### OTHER AVAILABLE CODES

1080 BL 4 R 24 E _ WD	lens	24°
	light colour	
	27	2700K
	30	3000K
	40	4000K (on request)

example of code composition  
1080 BL 4 R 24 E 30 WD


### TECHNICAL FEATURES

Code	1080 XX
Type	Downlight 90°
Material	Aluminum I Steel
Finishing	Black
Weight	0.65 Kg
Mounting	Ceiling recessed
IP rating	IP20
Insulation class	III
Control gear	Remote constant current electronic driver (not included)
Lamp type	LED 700 mA Vf: 6.5 VDC
Lamp wattage	1 × 4.5W
Luminous efficacy	1 × 540 lm - 3000K
Light distribution	Wide beam 24°
Fitting	-
Light colour	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 20 mm
Voltage connection	By driver (optional)
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	Suitable for installation on surfaces max 20 mm deep.

### OPTIONAL

ON/OFF driver	cod. H8700.E
Trailing and leading edge driver	cod. DRV0000087
DALI dimmable LED driver	cod. DRV0000030
PUSH dimmable LED driver	cod. DRV0000027
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000094

For further info and other available drivers please see page 474

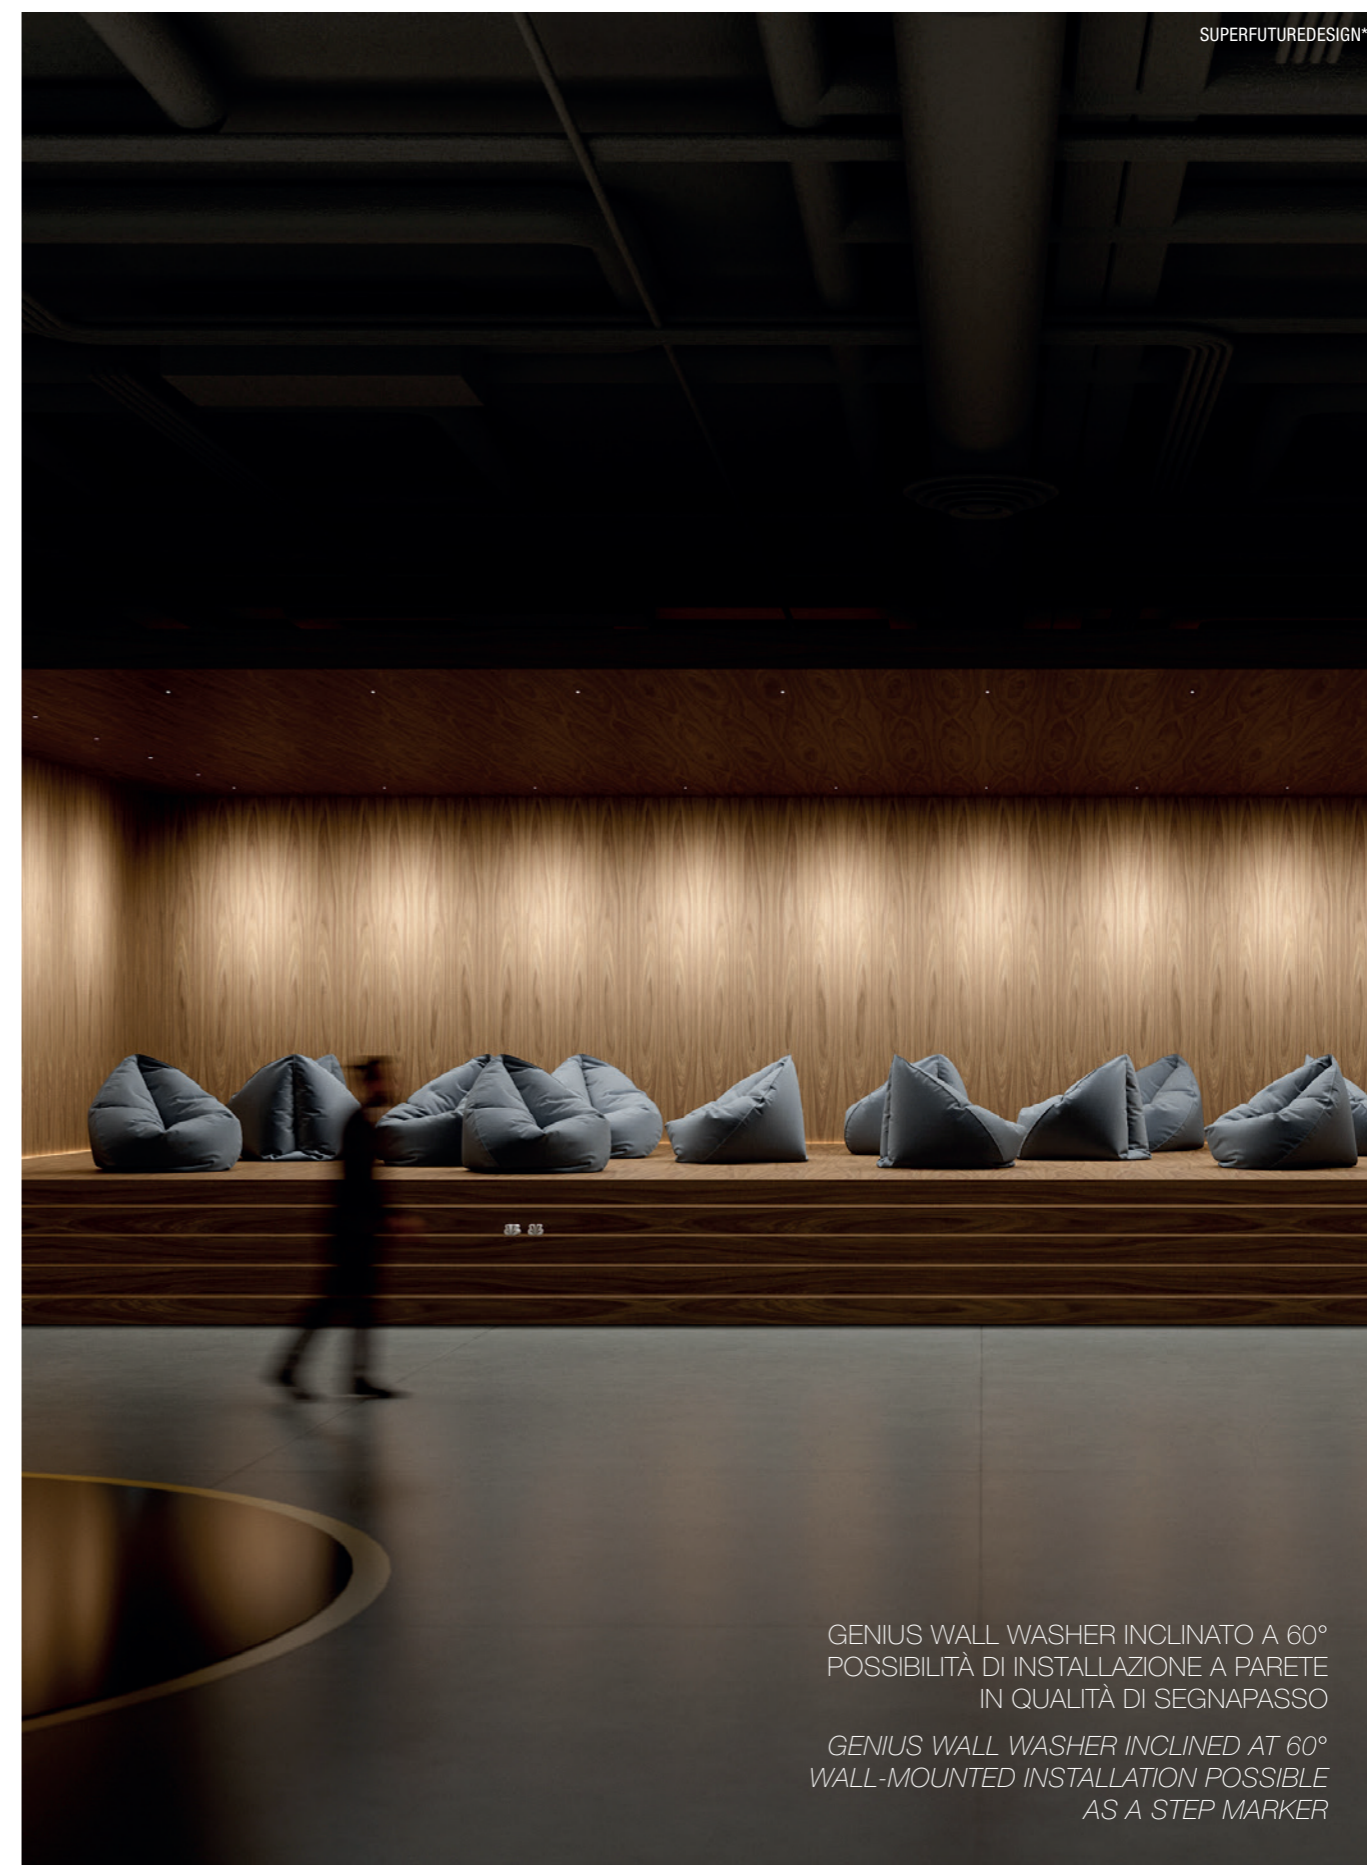

SUPERFUTUREDESIGN\*

GENIUS WALL WASHER INCLINATO A 60°  
POSSIBILITÀ DI INSTALLAZIONE A PARETE  
IN QUALITÀ DI SEGNAPASSO

GENIUS WALL WASHER INCLINED AT 60°  
WALL-MOUNTED INSTALLATION POSSIBLE  
AS A STEP MARKER