


GENIUS DYNAMIC WHITE


REGOLAZIONE DELLA TEMPERATURA COLORE
DA 2700K A 5000K
COLOUR TEMPERATURE DIMMING
FROM 2700K TO 5000K



Genius Dynamic White

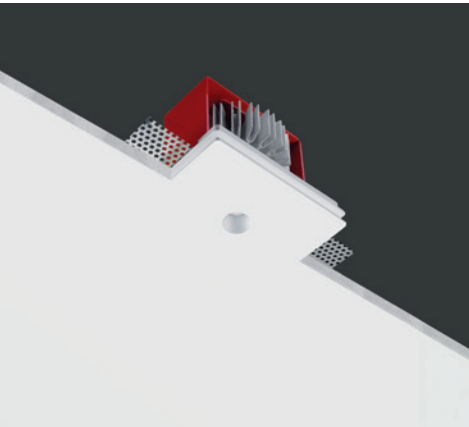

OPTIONAL
Honeycomb: anti-glare screen
for proper light directionally.



TECHNICAL FEATURES

Code	1881.AC
Type	Downlight 90°
Material	AC: AirCoral®
Absorption capacity*	1.39 m²
Weight	0.8 Kg
Mounting	Ceiling recessed
IP rating	IP20
Insulation class	III
Control gear	Remote constant current electronic driver (not included)**
Cut out for plasterboard	135 x 110 mm
Lamp type	LED
	1 x 700mA · Vf: 6 VDC 5000K 1 x 700mA · Vf: 6 VDC 2700K
Lamp wattage	1 x 8.5W
Luminous efficacy	from 365 lm up to 450 lm (from 2700K up to 5000K)
Light distribution	Wide beam 40°
Fitting	-
Light colour	White 2700/5000K
Light hole	Ø 20 mm
Voltage connection	By driver (optional)
CRI	90
Emergency	-
Energy efficiency class	A++
Note	**Genius Dynamic White requires separate power for the 2700K and 5000K. It's possible to use one driver dual channel or two drivers single channel for each.
	IP65 protection grade on request.

OPTIONAL

Dimmable driver single channel	cod. H8700DA
Brick box	cod. BR1881LT
Honeycomb screen	cod. ACC0053

Attention: you need 2 drivers code H8700DA for 1 Genius Dynamic White 1881.AC if installed alone. With 2 codes H8700DA you are also able to power maximum 2 Genius Dynamic White 1881.AC

For further info and other available drivers please see page 474

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²