


SLICE C




LAMPADA A PLAFONE A BASE QUADRATA, FORO
EMISSIONE 60 x 60 mm

SQUARE-BASE CEILING LAMP,
EMISSION HOLE 60 x 60 mm

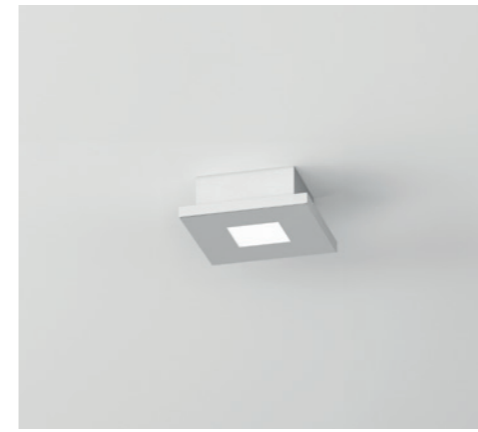

Slice C



OTHER AVAILABLE CODES

1922.AC 4 S 00 E _ ND	lens	diffuse
	light colour	
	27	2700K
	30	3000K
	40	4000K (on request)
example of code composition	1922.AC 4 S 00 E _ ND	


TECHNICAL FEATURES

Code	1922.AC XX
Type	Ceiling lamp
Material	AC: AirCoral®
Absorption capacity*	1.20 m²
Mounting	Ceiling mounting
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver on board (included)
Lamp type	LED 300 mA Vf: 23.5 VDC
Lamp wattage	1 x 7W
Luminous efficacy	1 x 800 lm - 3000K
Light distribution	Diffuse
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Light hole	60 x 60 mm
Voltage connection	220-240V · 50/60Hz
CRI	90
Emergency	-
Energy efficiency class	A++
Note	-

OPTIONAL

ON/OFF driver	cod. H8300.A
DALI dimmable LED driver	cod. DRV0000075
PUSH dimmable LED driver	cod. DRV0000074

For further info and other available drivers please see page 474



SLICE
see page 178

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²