



# L1 48V


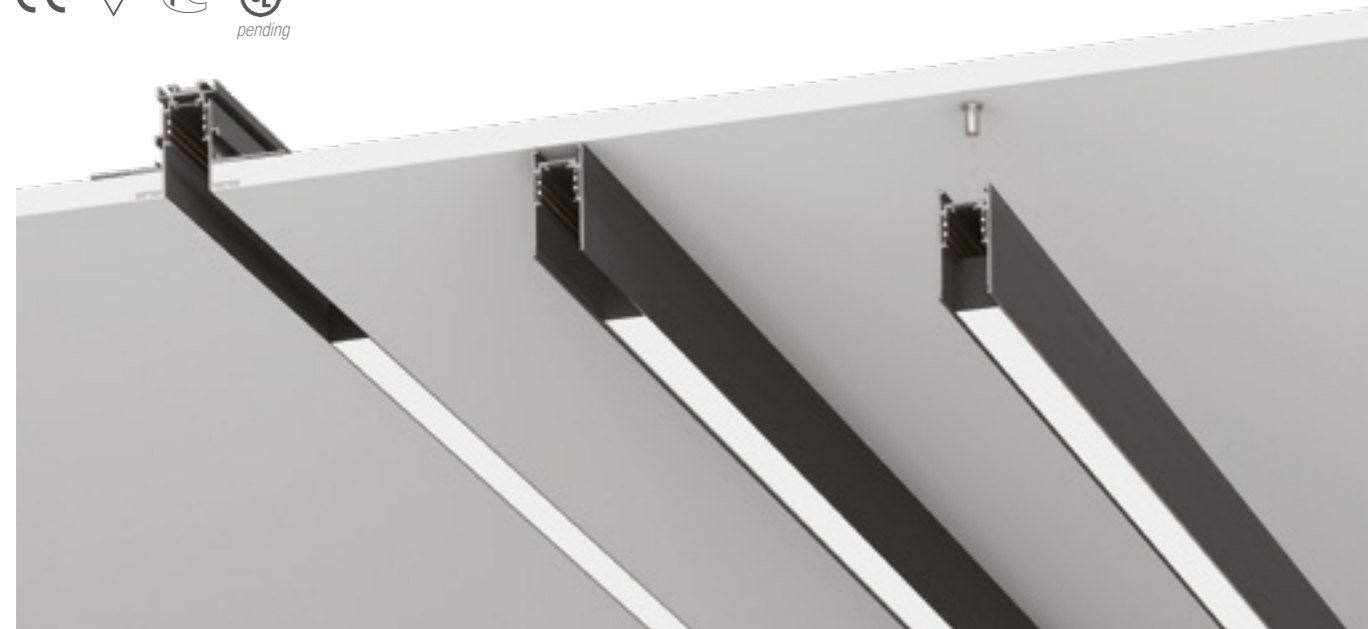


## TOTALMENTE A SCOMPARSA NEI BINARI B-INSIDE E B55

L1 è un modulo LED lineare per ambienti interni, adatto per installazioni su binario 48V per la serie B-INSIDE e B55. È disponibile in due lunghezze (565 mm e 1130 mm) e in due finiture diverse (bianco e nero). L1 è composto da LED ad altissima efficienza e uno schermo opale di chiusura che permette una diffusione della luce uniforme nell'ambiente in cui viene installato.

## TOTALLY RECESSED INTO THE B-INSIDE AND B55 TRACKS

L1 is a linear LED module for interiors, suitable to be installed on a 48V track for the B-INSIDE and B55 series. It is available in two lengths (565 mm and 1130 mm) and in two different finishes (black and white). L1 is composed of a high efficiency LED and an opal closure screen which diffuses an even light in the space where it is installed.

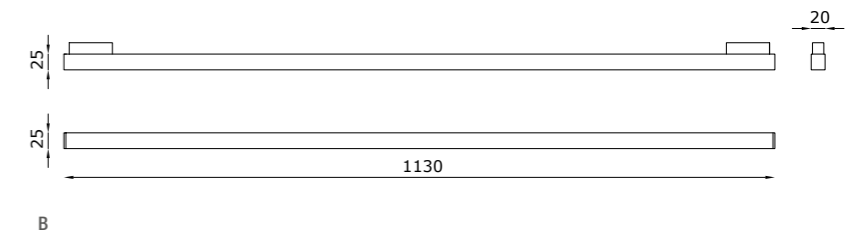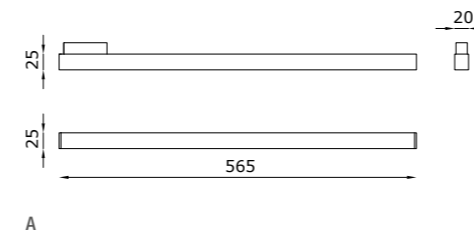

### CODE COMPOSITION

T048 L 00014 _00_0	
<i>dimmiability</i>	
<b>ND</b>	non dimmable
<b>DA</b>	DALI
<i>light colour</i>	
<b>27</b>	2700K
<b>30</b>	3000K
<b>40</b>	4000K
<i>finishing</i>	
<b>W1</b>	white
<b>B1</b>	black

T048 L 00015 _00_0	
<i>dimmiability</i>	
<b>ND</b>	non dimmable
<b>DA</b>	DALI
<b>11</b>	1-10V
<i>light colour</i>	
<b>27</b>	2700K
<b>30</b>	3000K
<b>40</b>	4000K
<i>finishing</i>	
<b>W1</b>	white
<b>B1</b>	black

example of code composition T048 L 00014 **W1** 00 **27** **ND** 0

### TECHNICAL FEATURES

Code	T048 L 00014 XX (fig.A)	T048 L 00015 XX (fig.B)
Type	LED module	LED module
Material	Aluminum	Aluminum
Finishing	White   Black	White   Black
Weight	0.4 Kg	0.8 Kg
Mounting	Track 48V	Track 48V
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Electronic driver on board (included)	Electronic driver on board (included)
Lamp type	LED	LED
Lamp wattage	12W	24W
Luminous efficacy	1500 lm - 3000K	3000 lm - 3000K
Light distribution	Opal screen diffused	Opal screen diffused
Fitting	-	-
Light colour	White 3000K   White 2700K White 4000K (on request)	White 3000K   White 2700K White 4000K (on request)
Voltage connection	48 VDC	48 VDC
CRI	>90	>90
UGR	<29	<29
Emergency	-	-
Note	Suitable for B-INSIDE and B-55.	Suitable for B-INSIDE and B-55.

