

L1 NANO 48V

CE


 pending


matt black


TOTALMENTE A SCOMPARSA NEI BINARI N-INSIDE E N10

Modulo LED lineare da interni che esprime a pieno il concetto di miniaturizzazione. L1 NANO è caratterizzato da un'anima in alluminio con una sezione di soli 10 mm, disponibile con finitura nera in due differenti lunghezze (674 mm e 1174 mm). Versatilità ed estrema efficacia si concretizzano in un apparecchio ad alte prestazioni; la sua luce uniforme, diffusa tramite schermo opale, è ultra performante e ad alta efficienza.


L1 NANO è installabile su binario 48V da incasso per la serie N-INSIDE e da superficie e sospensione N10.

TOTALLY RECESSED INTO THE N-INSIDE AND N10 TRACKS

Linear LED module for indoors which fully expresses the concept of miniaturisation. L1 NANO is characterised by an aluminium core with a section of only 10mm, available in a black finish in two different lengths (674 mm and 1174 mm). Versatility and extreme effectiveness come together in a high-performance device; its uniform light, diffused through an opal shade, is ultra-performing and highly efficient. L1 NANO can be installed on a recessed 48V track for the N-INSIDE series and can be surface and suspension mounted for the N10 series.

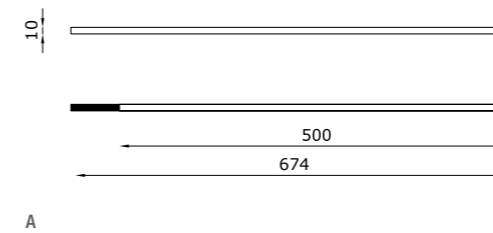

A

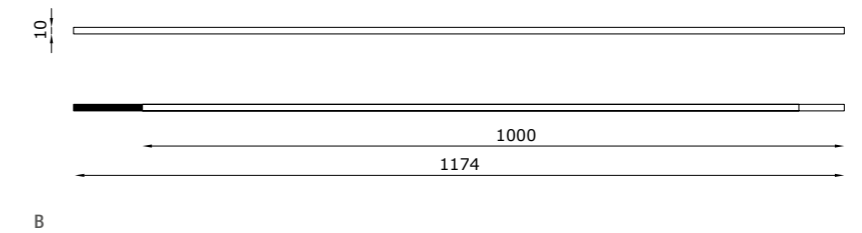

B



CODE COMPOSITION

T048 L 00019 B1 00 0	
dimmiability	
ND	non dimmable
DA	DALI
light colour	
27	2700K
30	3000K
40	4000K

T048 L 00020 B1 00 0	
dimmiability	
ND	non dimmable
DA	DALI
light colour	
27	2700K
30	3000K
40	4000K

example of code composition T048 L 00019 B1 00 27 ND 0

TECHNICAL FEATURES

Code	T048 L 00019 XX (fig.A)	T048 L 00020 XX (fig.B)
Type	LED module 	LED module 
Material	Aluminum	Aluminum
Finishing	Black	Black
Weight	0.1 Kg	0.15 Kg
Mounting	Nano track 48V	Nano track 48V
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Electronic driver on board (included)	Electronic driver on board (included)
Lamp type	LED 	LED 
Lamp wattage	6W	12W
Luminous efficacy	71.5 lm/W - 3000K	71.5 lm/W - 3000K
Light distribution	Opal screen diffused	Opal screen diffused
Fitting	-	-
Light colour	White 3000K White 2700K White 4000K	White 3000K White 2700K White 4000K
Voltage connection	48 VDC	48 VDC
CRI	>90	>90
UGR	<29	<29
Emergency	-	-
Note	Suitable for N-INSIDE and N-10.	Suitable for N-INSIDE and N-10.