

REVERSO

PRECISIONE MILLIMETRICA
MECCANISMO MOTORIZZATO
CON CASSA RIBALTABILE
TOTALE SCOMPARSA DELLA LUCE

MILLIMETRIC PRECISION
MOTORISED MECHANISM WITH TILTING CASE
TOTAL DISAPPEARANCE OF LIGHT

SCOMPARSATA TOTALE

COMPLETE
DISAPPEARANCE




la rotazione sull'asse
orizzontale permette di
occultare completamente
la parte elettrica

rotation on the horizontal
axis completely hides
the electrical part



completamente
ispezionabile

fully inspectable

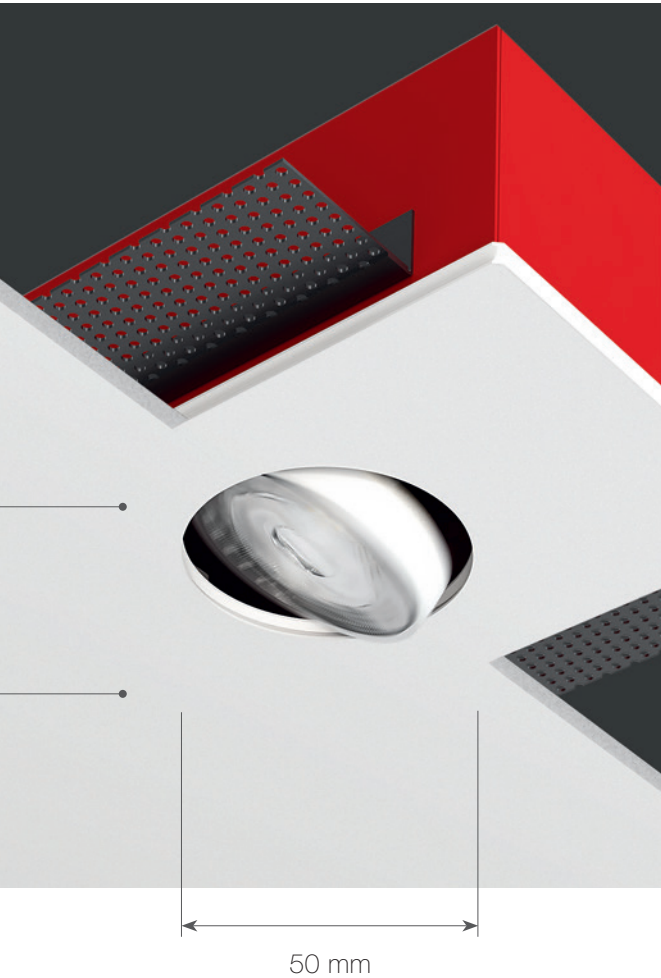

NEW TECHNOLOGY






Grazie ad un supercondensatore ruota anche in mancanza di tensione di rete. Non necessita di batteria.

Thanks to a super capacitor can rotate even in the absence of line voltage. No battery required.

IT Reverso è il nuovo prodotto ad incasso di Buzzi & Buzzi ispirato alla precisione degli orologi svizzeri. Silenzioso e discreto, il suo meccanismo motorizzato gestisce l'apertura e la chiusura con un motore surmoltiplicato. Dotato di centralina elettronica, assicura il controllo automatico delle funzioni e un auto-reset in caso di blackout. Offre lenti intercambiabili - narrow, medium e high beam - per una personalizzazione ottimale della luce. Facilmente manutenibile, con componenti come LED e motore sostituibili, ha una superficie pitturabile per un'estetica impeccabile in continuità con l'ambiente che lo accoglie.

EN Reverso is the new recessed product by Buzzi & Buzzi inspired by the precision of Swiss watches. Silent and unobtrusive, its motorised mechanism manages opening and closing with an overmultiplied motor. Equipped with an electronic control unit, it ensures automatic control of functions and an auto-reset in case of power failure. It offers interchangeable lenses – narrow, medium and high beam – for optimal light customization. Easily maintainable, with components such as LED and motor replaceable, it has a paintable surface for impeccable aesthetics in continuity with its surroundings.

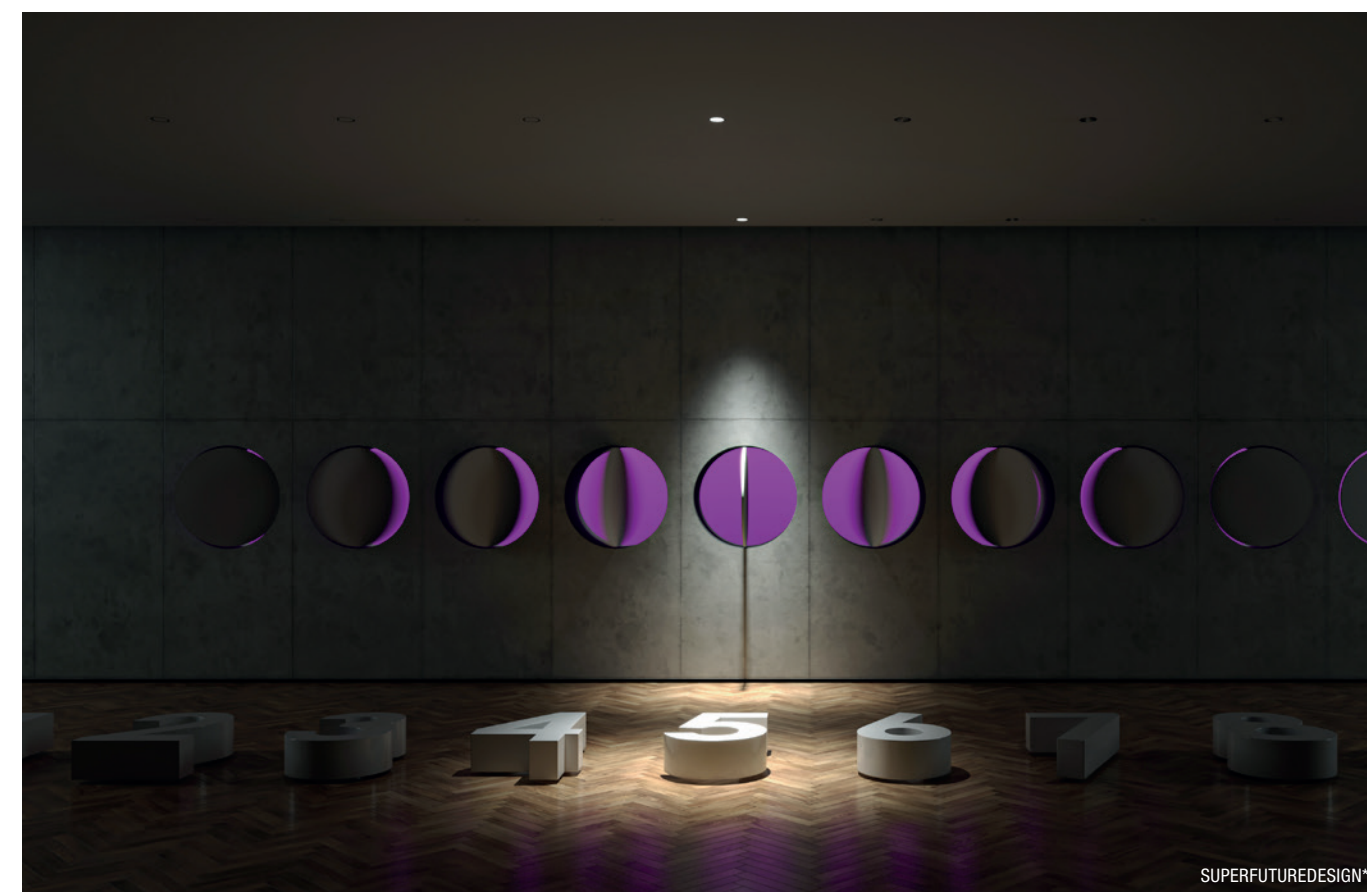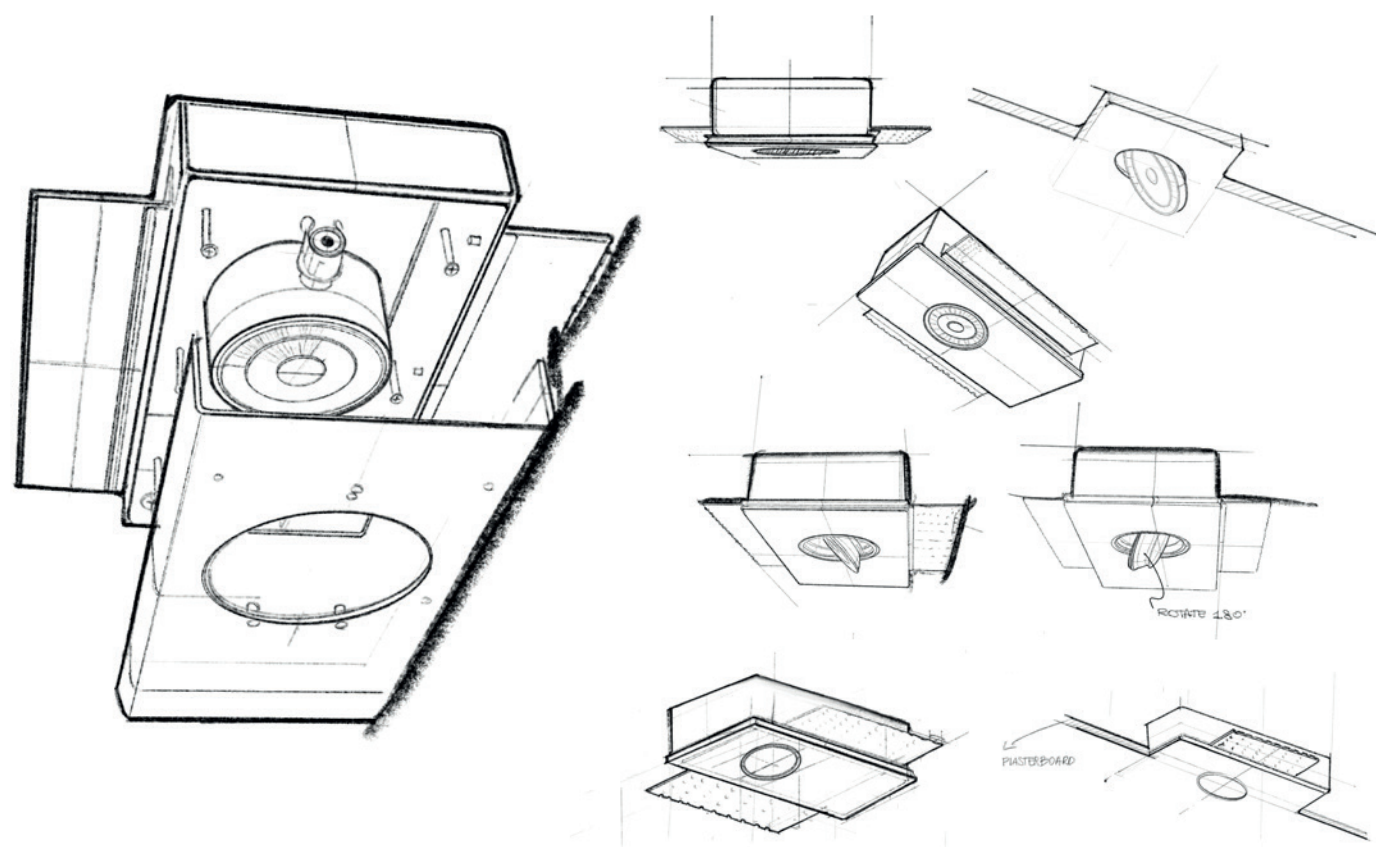



Reverso




OTHER AVAILABLE CODES

1859.AC	E	ND	<i>light colour</i>	
			27	2700K
			30	3000K
			40	4000K (on request)
			<i>lens</i>	
			12	12°
			31	31°
			54	54°

example of code composition
1859.AC 12 E 30 ND

TECHNICAL FEATURES

Code	1859.AC XX
Type	Downlight 90°
	
Material	AC: AirCoral®
Absorption capacity*	2.5 m²
Weight	1.5 Kg
Mounting	Ceiling recessed
IP rating	IP20
Insulation class	II
Control gear	Remote driver and electronic control unit (included)
Cut out for plasterboard	270 × 140 mm
Lamp type	LED 500 mA
Lamp wattage	1 × 6W
Luminous efficacy	1 × 800 lm - 3000K
Light distribution	Beam 12° 31° 54°
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Light hole	Ø 50 mm
Voltage connection	By driver (included)
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	Mechanism that allows the product to rotate during switching on and off.



* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²