

ORBIT




MINIATURIZZAZIONE (13 mm DI DIAMETRO)
ORIENTABILITÀ E POTENZA
MINIATURIZATION (13 mm DIAMETER)
ADJUSTABILITY AND POWER

INVISIBILITÀ, MINIATURIZZAZIONE,
ORIENTABILITÀ

*INVISIBILITY, MINIATURISATION,
ADJUSTABILITY*

orientabile sul piano verticale
e direzionabile sul piano orizzontale

*adjustable on the vertical axis
and on the horizontal axis*

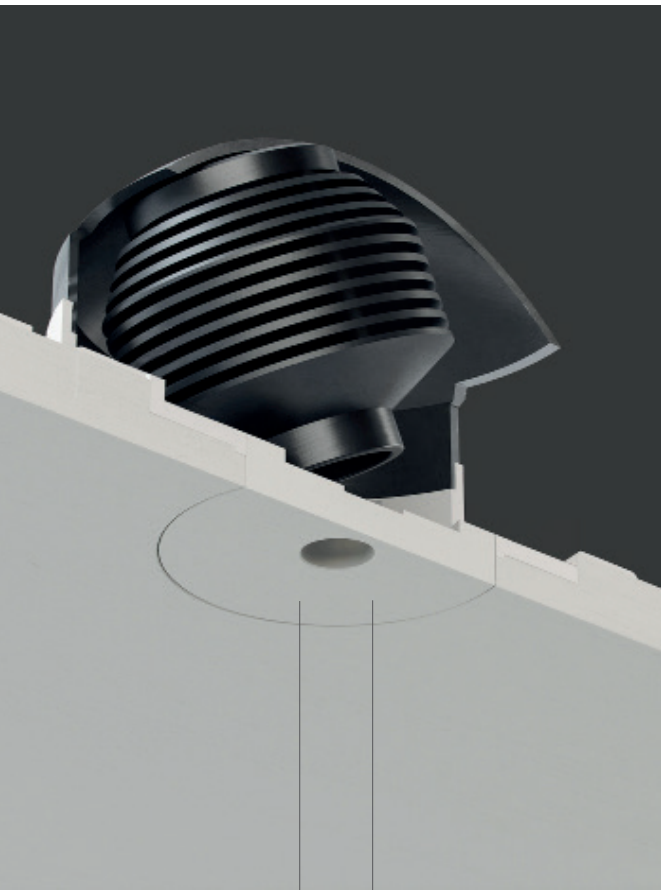

13 mm


il foro luce miniaturizzato enfatizza
i dettagli garantendo maggior precisione
e qualità estetica

*the miniaturised light hole emphasises
details ensuring greater precision
and aesthetic quality*



IT Orbit, l'incasso a scomparsa totale che coniuga invisibilità, miniaturizzazione e orientabilità del fascio. Il prodotto è dotato di un foro emissione luce di 13 mm di diametro. La lente di 24° orientabile sull'asse orizzontale e verticale, offre ai lighting la possibilità di enfatizzare i dettagli con precisione.

EN Orbit, the totally concealed downlight that combines invisibility, miniaturisation and adjustable beam. The product features a 13 mm diameter light-emitting hole. The 24° lens, which can be swivelled horizontally and vertically, offers lighting designers the possibility of emphasising details with precision.

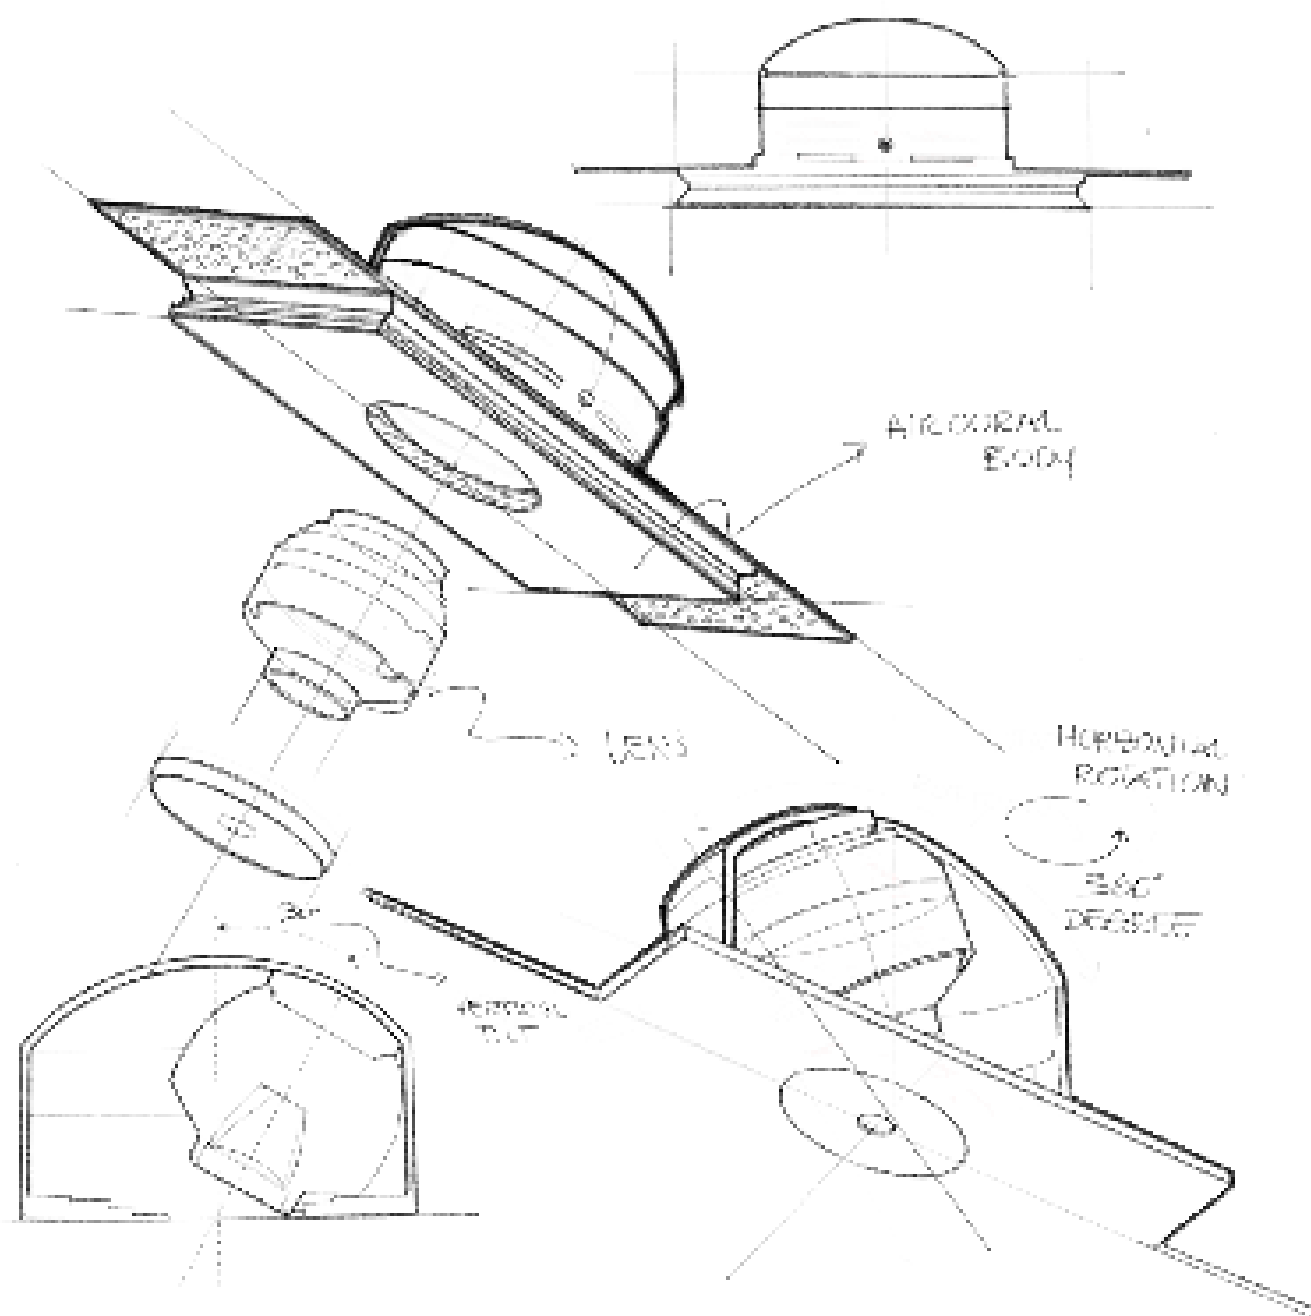



Orbit



OTHER AVAILABLE CODES

1017.AC 4 R 24 E _ WD	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K (on request)
emergency 1019.AC 4 R 24 E _ WD	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K (on request)
example of code composition 1017.AC 4 R 24 E 30 WD		


TECHNICAL FEATURES

Code	1017.AC XX	1019.AC XX emergency
Type	Tiltable downlight	Tiltable downlight
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	2.72 m²	2.72 m²
Weight	1 Kg	1 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included)
Cut out for plasterboard	170 × 130 mm	170 × 130 mm
Lamp type	LED 200 mA ⚡ Vf: 36 VDC	LED 200 mA ⚡ Vf: 36 VDC
Lamp wattage	1 × 8W	1 × 8W
Luminous efficacy	1 × 1125 lm - 3000K	1 × 1125 lm - 3000K
Light distribution	Wide beam 24°	Wide beam 24°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 13 mm	Ø 13 mm
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	-	-

OPTIONAL

ON/OFF driver	cod. DRV0000173	cod. DRV0000173
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000172	cod. DRV0000172

For further info and other available drivers please see page 474



SUPERFUTUREDESIGN*

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²