

SLICE



800 lm IN 12,5 mm;
AZZERAMENTO DELL'INGOMBRO
POSTERIORE

800 lm IN 12.5 mm;
ZEROING OF REAR SPACE

SCOMPARSATA TOTALE
IN SOLI 12.5 MM


TOTALLY CONCEALED INSTALLATION
IN JUST 12.5 MM (0.49")

necessita di soli 5 mm
per l'installazione, senza
cassaforma

needs 5 mm (0.2") for
installation, without
mounting formwork

ispezione frontale
per la manutenzione


front inspection
for maintenance purposes

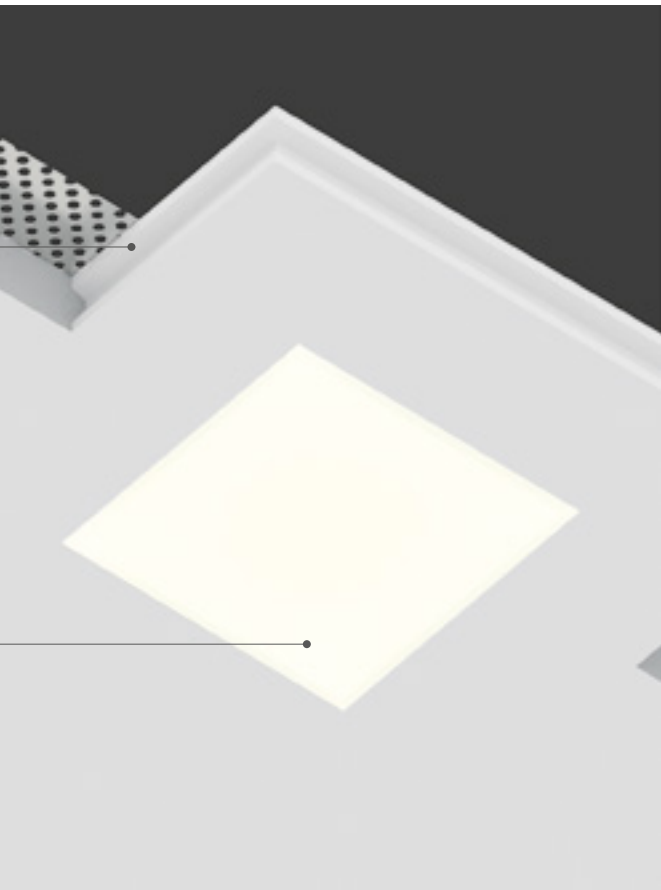

800 lm

elevato output luminoso
high luminous output

MINIMUM REAR SIZE

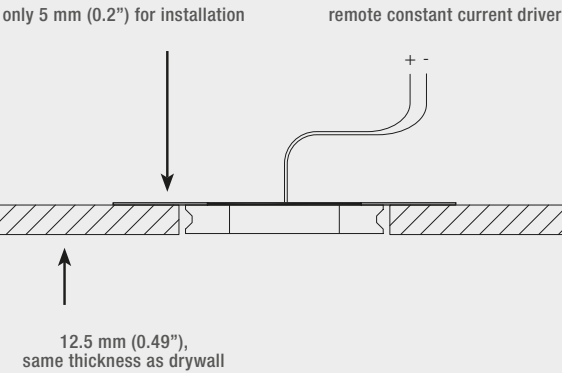


Slice necessita di 5 mm posteriori per l'installazione, è privo di cassaforma di montaggio ed è installabile all'interno di soli 12.5 mm di strato di cartongesso. Grazie alla possibilità di ispezione frontale, non è necessaria alcuna botola di controllo.

Slice needs 5 mm (0.2") for installation, does not need any formwork and can be installed in drywall of just 12.5 mm (0.49") thick. It can be inspected from the front, it does not need any inspection hatch.



Slice Square



OTHER AVAILABLE CODES

1921.AC 4 R 00 E _ WD	<i>lens</i>	diffuse
	<i>light colour</i>	
	27	2700K
	30	3000K
example of code composition	40	4000K (on request)
	1921.AC 4 R 00 E 30 WD	

TECHNICAL FEATURES

Code	1921.AC XX
Type	Downlight 90°
	
Material	AC: AirCoral®
Absorption capacity*	1.20 m²
Weight	0.08 Kg
Mounting	Wall and ceiling recessed
IP rating	IP40
Insulation class	III
Control gear	Remote constant current driver (not included)
Cut out for plasterboard	130 × 130 mm
Lamp type	LED 300 mA
	⚡ Vt: 23.5 VDC
Lamp wattage	1 × 7W
Luminous efficacy	1 × 800 lm
Light distribution	Diffuse
Fitting	-
Light colour	White 3000K White 2700K I 4000K (on request)
Light hole	60 × 60 mm
Voltage connection	By driver (optional)
CRI	90
Emergency	-
Energy efficiency class	A++
Note	-

OPTIONAL

ON/OFF driver	cod. H8300.A
DALI dimmable LED driver	cod. DRV0000075
PUSH dimmable LED driver	cod. DRV0000074


For further info and other available drivers please see page 474



SLICE C
see page 361



Slice Round



OTHER AVAILABLE CODES

1923.AC 4 R 00 E _ WD	<i>lens</i>	diffuse
	<i>light colour</i>	
	27	2700K
	30	3000K
example of code composition	40	4000K (on request)
	1923.AC 4 R 00 E 30 WD	

TECHNICAL FEATURES

Code	1923.AC XX
Type	Downlight 90°
	
Material	AC: AirCoral®
Absorption capacity*	1.20 m²
Weight	0.08 Kg
Mounting	Wall and ceiling recessed
IP rating	IP40
Insulation class	III
Control gear	Remote constant current driver (not included)
Cut out for plasterboard	130 × 130 mm
Lamp type	LED 300 mA
	⚡ Vt: 23.5 VDC
Lamp wattage	1 × 7W
Luminous efficacy	1 × 800 lm
Light distribution	Diffuse
Fitting	-
Light colour	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 60 mm
Voltage connection	By driver (optional)
CRI	90
Emergency	-
Energy efficiency class	A++
Note	-

OPTIONAL

ON/OFF driver	cod. H8300.A
DALI dimmable LED driver	cod. DRV0000075
PUSH dimmable LED driver	cod. DRV0000074

For further info and other available drivers please see page 474

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²