


LIGHT

SINGOLA E DOPPIA LUCE CON LED A VISTA
SINGLE AND DOUBLE LIGHT WITH VISIBLE LED

Indoor Recessed




Monolight



OTHER AVAILABLE CODES

6328.Z.27.AC	<i>lens</i>	40°
	<i>light colour</i>	2700K
6328.Z.40.AC	<i>lens</i>	40°
	<i>light colour</i>	4000K (on request)

TECHNICAL FEATURES

Code	6328.Z.AC	6323.AC
Type	Downlight 90° 	Downlight 90° 
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	2.82 m²	2.82 m²
Weight	0.9 Kg	0.9 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Electronic transformer (not included)
Cut out for plasterboard	145 × 145 mm	145 × 145 mm
Lamp type	LED 500 mA  Vf: 18 VDC	QR CB 51 
Lamp wattage	1 × 9W	1 × 50W max
Luminous efficacy	1 × 1125 lm - 3000K	-
Light distribution	Wide beam 40°	-
Fitting	-	GU5.3
Light colour	White: 3000K	-
Light hole	80 × 80 mm	80 × 80 mm
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	-
Emergency	-	-
Energy efficiency class	A++	A
Note	On request available emergency. Other available light colours: 2700K, 4000K (on request).	-

OPTIONAL



ON/OFF driver	cod. H8500.E	-
Trailing and leading edge driver	cod. DRV0000163	cod. H8060.LED cod. H8060
DALI dimmable LED driver	cod. DRV0000029	-
PUSH dimmable LED driver	cod. DRV0000026	-
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000093	-
Kit LED dimmable	-	cod. 0008KIT
Brick box	cod. BR6328LT	cod. BR6323LT

For further info and other available drivers please see page 474


* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²



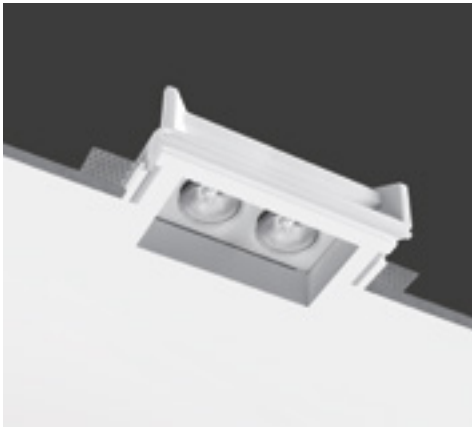

Monolight Dim To Warm

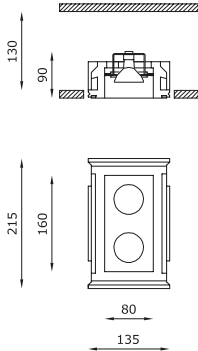

Bilight



TECHNICAL FEATURES

Code	6325.AC 4 R 40 E 98 WD
Type	Downlight 90° 
Material	AC: AirCoral®
Absorption capacity*	2.82 m²
Weight	0.9 Kg
Mounting	Ceiling recessed
IP rating	IP20
Insulation class	III
Control gear	Remote ON/OFF driver** (not included)
Cut out for plasterboard	145 × 145 mm
Lamp type	LED 350 mA  Vf: 17 VDC
Lamp wattage	1 × 6W
Luminous efficacy	1 × 600 lm (from 1800K up to 3000K)
Light distribution	Wide beam 40°
Fitting	-
Light colour	Dimming range 1800/3000K
Light hole	80 × 80 mm
Voltage connection	By driver (optional)
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	**Monolight Dim To Warm requires dimming: amplitude (AM) dim to warm wide range input voltage.

OPTIONAL

Amplitude DALI dimmable LED driver	H8350DA.AM
Amplitude PUSH dimmable LED driver	H8350PH.AM
Brick box	cod. BR6325LT

For further info and other available drivers please see page 474

OTHER AVAILABLE CODES

6318.Z.27.AC	<i>lens</i>	40°
	<i>light colour</i>	2700K
6318.Z.40.AC	<i>lens</i>	40°
	<i>light colour</i>	4000K (on request)

TECHNICAL FEATURES


Code	6318.Z.AC	6313.AC
Type	Downlight 90° 	Downlight 90° 
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	4.68 m²	4.68 m²
Weight	1.3 Kg	1.3 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Electronic transformer (not included)
Cut out for plasterboard	225 × 145 mm	225 × 145 mm
Lamp type	LED 500 mA  Vf: 2 × 18 VDC	QR CB 51 
Lamp wattage	2 × 9W	2 × 50W max
Luminous efficacy	2 × 1125 lm - 3000K	-
Light distribution	Wide beam 40°	-
Fitting	-	GU5.3
Light colour	White: 3000K	-
Light hole	160 × 80 mm	160 × 80 mm
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	-
Emergency	-	-
Energy efficiency class	A++	A
Note	On request available emergency. Other available light colours: 2700K, 4000K (on request).	-

OPTIONAL


ON/OFF driver	cod. H8500.E	-
Trailing and leading edge driver	cod. DRV0000163	cod. H8060.LED
DALI dimmable LED driver	cod. DRV0000029	-
PUSH dimmable LED driver	cod. DRV0000026	-
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000093	-
Dimmable electronic transformer	-	cod. H8150
Kit LED dimmable	-	cod. 0008KIT
Brick box	cod. BR6318LT	cod. BR6313LT

For further info and other available drivers please see page 474

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²

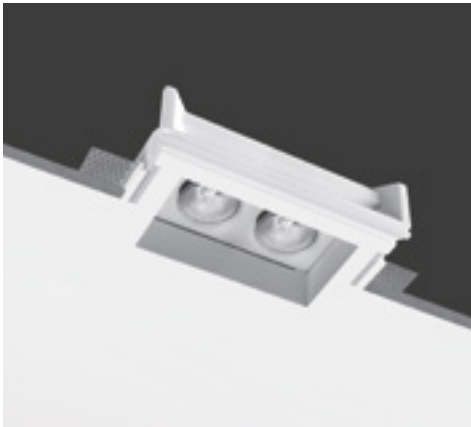

Bilight Dim To Warm

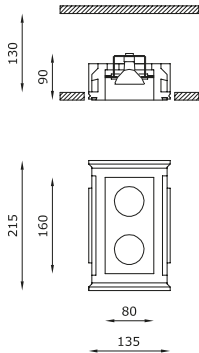

TECHNICAL FEATURES

Code	6315.AC 4 R 40 E 98 WD
Type	Downlight 90°
Material	AC: AirCoral®
Absorption capacity*	2.82 m²
Weight	0.9 Kg
Mounting	Ceiling recessed
IP rating	IP20
Insulation class	III
Control gear	Remote ON/OFF driver** (not included)
Cut out for plasterboard	225 × 145 mm
Lamp type	LED 350 mA
	VI: 17 VDC
Lamp wattage	2 × 6W
Luminous efficacy	2 × 600 lm (from 1800K up to 3000K)
Light distribution	Wide beam 40°
Fitting	-
Light colour	Dimming range 1800/3000K
Light hole	160 × 80 mm
Voltage connection	By driver (optional)
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	**Bilight Dim To Warm requires dimming: amplitude (AM) dim to warm wide range input voltage.

OPTIONAL

Amplitude DALI dimmable LED driver	H8350DA.AM
Amplitude PUSH dimmable LED driver	H8350PH.AM
Brick box	cod. BR6318LT

For further info and other available drivers please see page 474



* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²