



PIXEL IP65

OLTRE 1000 lm IN 16 mm DI DIAMETRO
INSTALLABILE IN SOLI 35 mm DI INGOMBRO
FACILE MANUTENZIONE

OVER 1000 lm IN 16 mm DIAMETER
INSTALLABLE IN JUST 35 mm SPACE
EASY MAINTENANCE

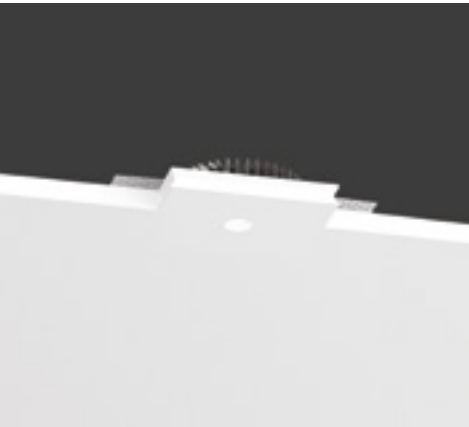

Pixel IP65



OTHER AVAILABLE CODES

1018.CW 4 R _ E _ WD	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K (on request)
example of code composition	<i>lens</i>	
	15	15°
	25	25°
	45	45° (on request)

1018.CW 4 R 25 E 30 WD

TECHNICAL FEATURES

Code	1018 XX
Type	Downlight 90°
	
Material	CW: Coral WaterOut® waterproof
Absorption capacity*	1.39 m²
Weight	-
Mounting	Ceiling recessed
IP rating	IP65
Insulation class	III
Control gear	Remote constant current driver (not included)
Cut out for plasterboard	150 x 150 mm
Lamp type	LED 700 mA ⚡ Vt: 11.5 VDC
Lamp wattage	1 x 8.5W
Luminous efficacy	1 x 1000 lm - 3000K
Light distribution	Narrow beam 15° Beam 25° 45° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Light hole	Ø 16 mm
Voltage connection	By driver (optional)
CRI	90
Emergency	-
Energy efficiency class	A++
Note	-

OPTIONAL

ON/OFF driver	cod. H8700.E
Trailing and leading edge driver	cod. DRV0000087
DALI dimmable LED driver	cod. DRV0000030
PUSH dimmable LED driver	cod. DRV0000027
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000094
Brick box	cod. BR1018LT

For further info and other available drivers please see page 474



PIXEL
see page 163



PIXEL C
see page 361